

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS34541

FEDERAL SUPPLY CLASS
5935

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS3454C AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS3454C. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

ANY MATERIAL RELATING TO QUALIFIED PRODUCT LISTS HAS NOT BEEN ADOPTED BY SAE. THIS MATERIAL WAS PART OF THE ORIGINAL MILITARY SPECIFICATION AND IS REPRINTED HERE FOR HISTORIC REFERENCE ONLY.

SAENORM.COM : Click to view the full PDF of as34541

ISSUED 1998-01 REAFFIRMED 2003-11

PREPARED BY SUBCOMMITTEE AE-8C1


PROCUREMENT SPECIFICATION MIL-C-5015

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONNECTORS, RECEPTACLE, ELECTRICAL,
JAM NUT MOUNTING, REAR RELEASE
CRIMP CONTACT, AN TYPE

AS34541
SHEET 1 OF 3

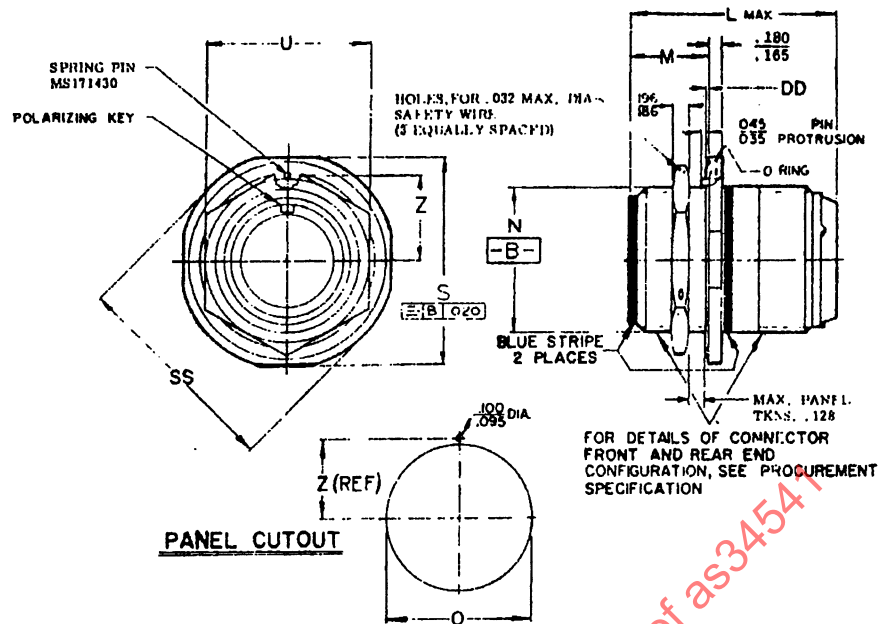


CLASSES L, U, & W ENVIRONMENT RESISTANT
CLASS K CANCELLED AFTER 5 APR 72

NOTES:

1. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS $\pm .016$.
2. DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5-1973.
3. MIL-C-5015 FRONT AND REAR RELEASE CRIMP CONTACT, AND SOLDER CONTACT CONNECTORS ARE INTERMATEABLE.
4. UNLESS OTHERWISE SHOWN, CORRESPONDING FEATURES OF PIN AND SOCKET CONTACT CONNECTORS ARE IDENTICAL.
5. FOR INSERT ARRANGEMENTS SEE MIL-STD-1651.

CLASS U INACTIVE FOR DESIGN AFTER 23 MAR 76
USE CLASS L FOR NEW DESIGN

EXAMPLE OF PART NO: MS3454L 28-21PX

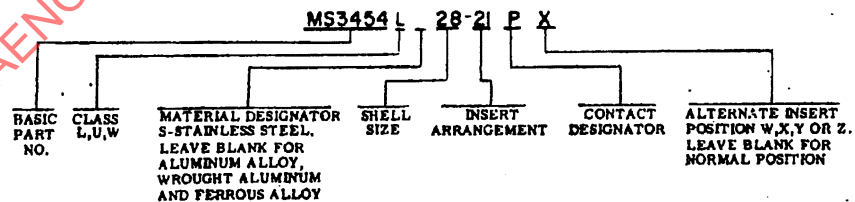

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.