


AS3477

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

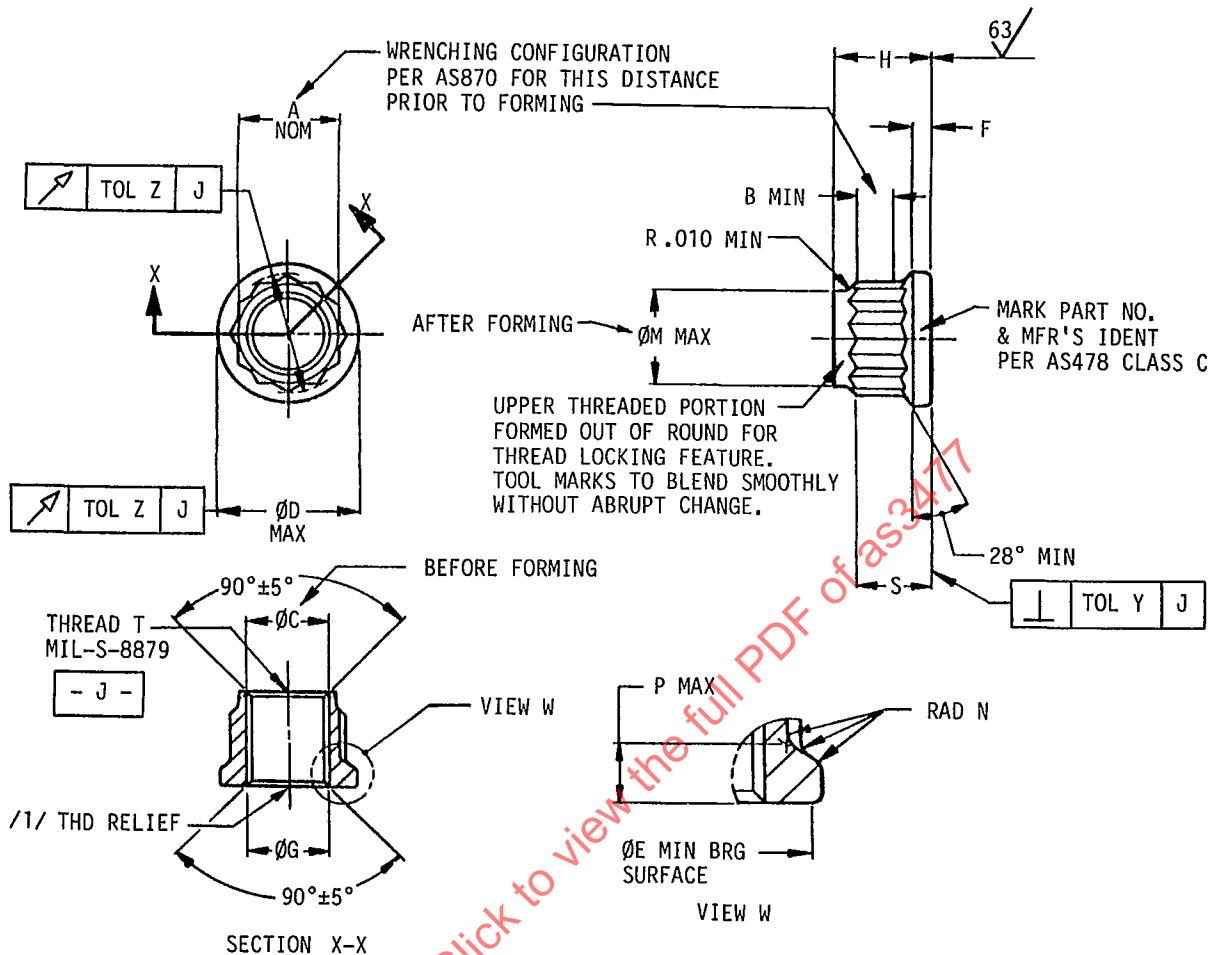

PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT, SELF LOCKING - DOUBLE HEXAGON,
EXTENDED WASHER, UNS S66286,
SILVER PLATED, UNJ THREAD

AS3477

SHEET 1 OF 3

AS3477

TABLE 1 - DIMENSIONS

PART NUMBER	THREAD T	A NOM	B MIN	ØC	ØD MAX	ØE MIN	F	ØG	H	ØM MAX	RAD N	P MAX	S	Y	Z	APPROX MASS LB/100
AS3477-08	.164-36UNJF-3B	.2188	.070	.164-.184	.294	.264	.045-.060	.164-.194	.230-.250	.229	.005-.020	.090	.135-.175	.004	.005	.17
AS3477-09	.190-32UNJF-3B	.2500	.070	.190-.210	.355	.325	.045-.060	.190-.220	.230-.250	.262	.005-.030	.095	.150-.190	.004	.006	.22
AS3477-10	.250-28UNJF-3B	.3125	.095	.250-.270	.450	.410	.045-.060	.250-.280	.308-.328	.326	.005-.030	.110	.190-.235	.005	.007	.41
AS3477-11	.3125-24UNJF-3B	.3750	.108	.312-.332	.535	.495	.060-.075	.312-.342	.340-.360	.392	.005-.035	.130	.220-.270	.005	.008	.70
AS3477-12	.375-24UNJF-3B	.4375	.147	.375-.395	.608	.559	.070-.090	.375-.405	.438-.458	.458	.005-.040	.150	.270-.330	.005	.009	.99
AS3477-13	.4375-20UNJF-3B	.5625	.150	.438-.458	.692	.652	.080-.100	.438-.468	.449-.469	.588	.005-.040	.150	.270-.330	.006	.010	1.51
AS3477-14	.500-20UNJF-3B	.6250	.176	.500-.520	.786	.746	.100-.120	.500-.535	.548-.568	.654	.005-.060	.180	.335-.405	.006	.012	2.35
AS3477-15	.5625-18UNJF-3B	.6875	.205	.562-.582	.880	.840	.110-.130	.562-.597	.613-.633	.720	.005-.070	.195	.380-.460	.007	.014	3.67