

REV.
B

AS3482

FEDERAL SUPPLY CLASS
5310


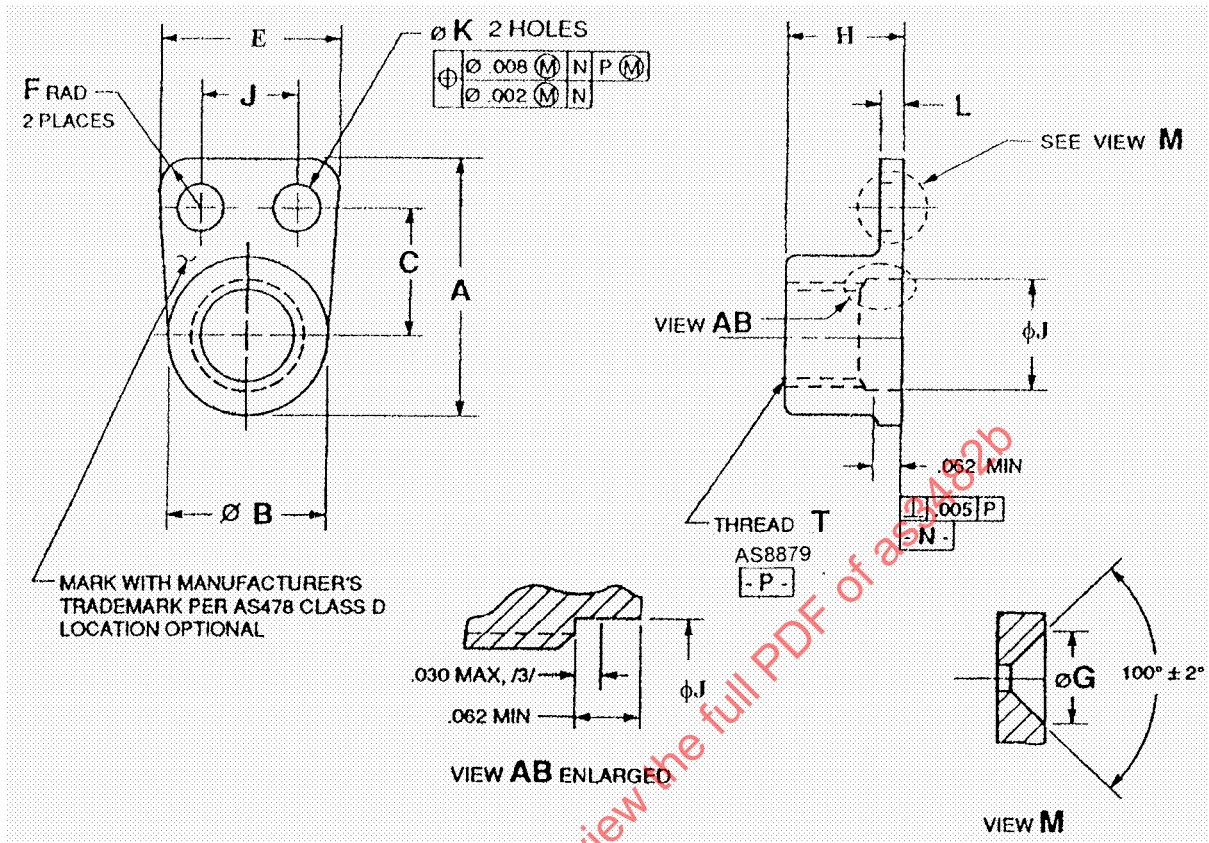


FIGURE 1

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

(R) NUT, SELF-LOCKING, PLATE, SIDE BY SIDE,
REDUCED RIVET SPACING, LOW HEIGHT, UNS S66286,
CLASS: 125 KSI/800 °F

AS3482
SHEET 1 OF 3

**REV.
B**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1

PART NUMBER	T THREAD	A MAX	B	C ±.005	J MIN	H MAX	F MIN	G ±.010	E MAX	D ±.002	K +.005 -.000	L MAX	AXIAL STRENGTH LBF MIN	APPROX MASS LB/100
AS3482-02	.1640-32UNC-3B	.486	.235-.297	.234	.168	.250	.100	.200	.437	.219	.098	.047	1720	.23
AS3482-03	.1900-32UNJF-3B	.521	.298-.328	.250	.194	.250	.100	.200	.437	.219	.098	.047	2460	.28
AS3482-04	.2500-28UNJF-3B	.591	.380-.414	.281	.254	.281	.100	.200	.437	.219	.098	.055	4580	.45
AS3482-05	.3125-24UNJF-3B	.747	.475-.505	.359	.317	.328	.125	.230	.537	.269	.130	.065	7390	.78