

AS3485


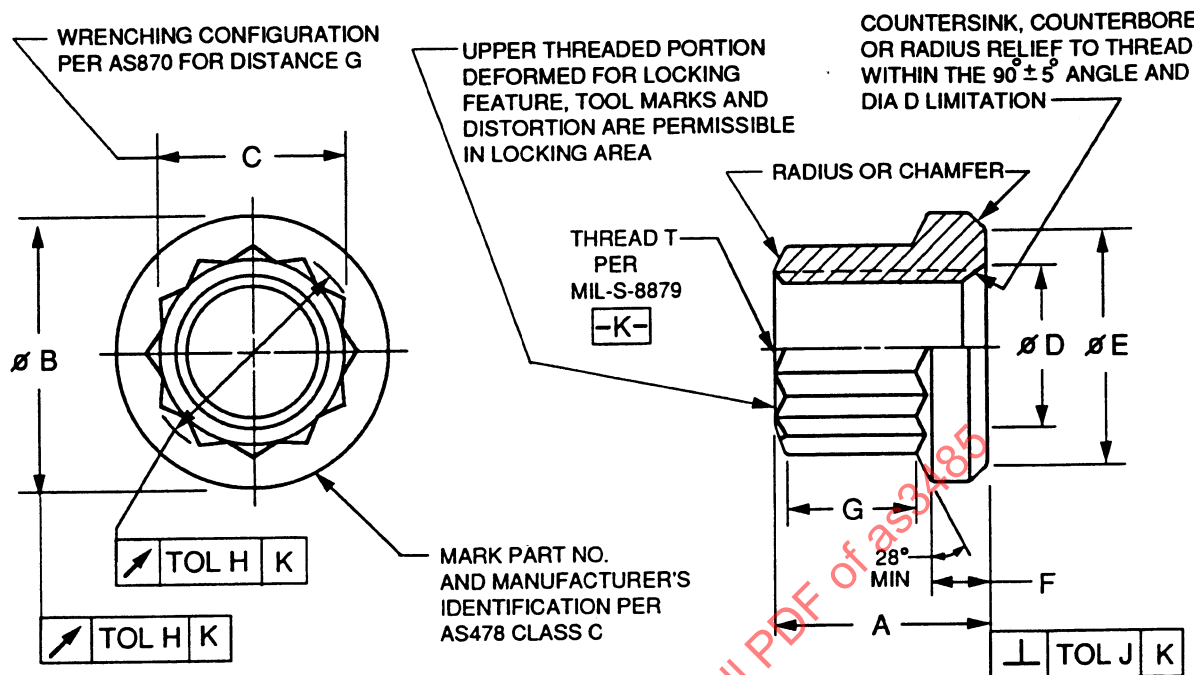


FIGURE 1

TABLE 1

PART NUMBER	T THREAD	A +.005/- .010	ϕB MAX	C NOM	ϕD MAX	ϕE MIN	F	G MIN	H	J	APPROX MASS LB/100
AS3485-09	.1900-32UNJF-3B	.245	.340	.2500	.220	.310	.035-.057	.125	.006	.004	.20
AS3485-10	.2500-28UNJF-3B	.317	.430	.3125	.280	.400	.045-.057	.185	.007	.005	.40
AS3485-11	.3125-24UNJF-3B	.355	.515	.3750	.345	.485	.055-.068	.195	.008	.005	.70
AS3485-12	.3750-24UNJF-3B	.453	.589	.4375	.405	.558	.075-.100	.250	.009	.005	1.00

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
 An SAE International Group

AEROSPACE STANDARD

 NUT, SELF-LOCKING, 12 POINT,
 REDUCED HEIGHT, SILVER PLATE,
 UNS S66286

AS3485
 SHEET 1 OF 2

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: custsv@sa.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1993-08 REAFFIRMED 2004-07