

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS3554™

FEDERAL SUPPLY CLASS
5310

RATIONALE

THIS IS A LIMITED SCOPE REVISION. IN DRAWING NOTE 6, UPDATE FPI REFERENCE AND REVISE SENSITIVITY LEVEL REQUIREMENT TO A MINIMUM LEVEL.


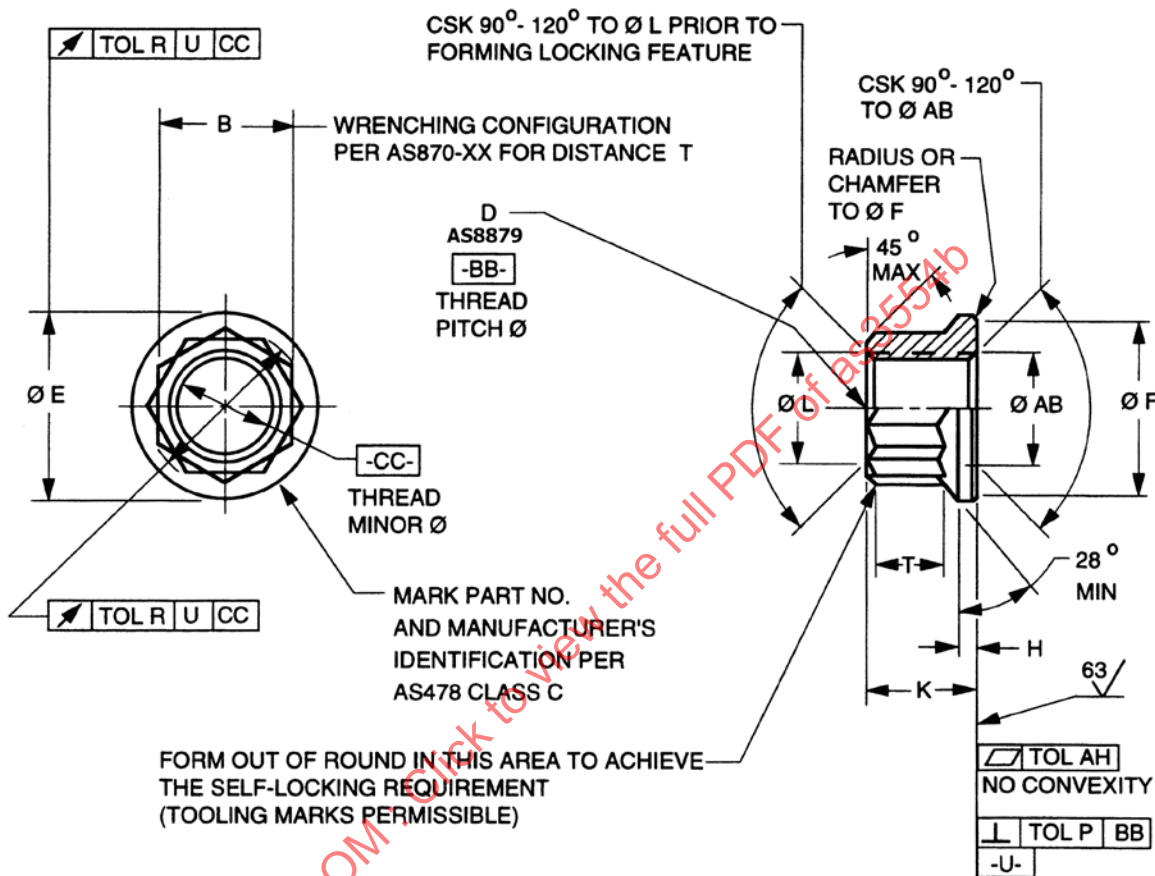


FIGURE 1

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3554B>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7253



AEROSPACE STANDARD

NUT, SELF-LOCKING, DOUBLE HEXAGON,
SILVER PLATED, REDUCED HEIGHT
180 KSI, 1400 °F, UNS N07001

AS3554™
SHEET 1 OF 3

REV.
B

TABLE 1A

PART NUMBER	D THREAD	B NOM	DASH NO.	E MAX	F MIN	AB	H MIN	K MAX
AS3554-09	.190-32 UNJF-3B	.2500	08	.340	.325	.190-.220	.045	.250
AS3554-10	.250-28 UNJF-3B	.3125	10	.450	.410	.250-.280	.045	.322
AS3554-11	.3125-24 UNJF-3B	.3750	12	.525	.495	.312-.342	.060	.360
AS3554-12	.375-24 UNJF-3B	.4375	14	.600	.560	.375-.405	.070	.458
AS3554-13	.4375-20 UNJF-3B	.5625	18	.690	.650	.438-.468	.080	.535
AS3554-14	.500-20 UNJF-3B	.6250	20	.780	.740	.500-.532	.100	.610
AS3554-15	.5625-18 UNJF-3B	.6875	22	.880	.840	.562-.597	.110	.680
AS3554-16	.625-18 UNJF-3B	.7812	25	.970	.925	.625-.660	.120	.790
AS3554-17	.750-16 UNJF-3B	.9375	30	1.230	1.180	.750-.785	.130	.935

TABLE 1B

PART NUMBER	L	T MIN	P	R	AH	APPROX MASS LB/100
AS3554-09	.190-.210	.082	.004	.006	.0014	.25
AS3554-10	.250-.270	.130	.005	.007	.0014	.46
AS3554-11	.312-.332	.170	.005	.008	.0016	.71
AS3554-12	.375-.395	.210	.005	.009	.0016	1.26
AS3554-13	.438-.458	.230	.005	.010	.0020	2.56
AS3554-14	.500-.520	.260	.006	.012	.0020	3.11
AS3554-15	.562-.582	.320	.006	.014	.0020	4.63
AS3554-16	.625-.645	.370	.007	.015	.0020	6.81
AS3554-17	.750-.770	.500	.007	.016	.0020	12.30

NOTES:

1. MATERIAL: HEAT RESISTING NICKEL ALLOY AMS5708.
2. HARDNESS: 32 TO 44 HRC.
3. FINISH: SILVER PLATE PER AMS2411; SILVER PLATE ONLY ON THREADS WITH OPTIONAL COVERAGE ON COUNTERSINKS. NO SILVER SHALL ENCROACH ON THE SEATING SURFACE. DIMENSIONS APPLY AFTER PLATING.
4. PROCUREMENT SPECIFICATION: AS7253
5. BREAK EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
6. FLUORESCENT PENETRANT INSPECTION PER ASTM E1417/E1417M, TYPE 1, SENSITIVITY LEVEL 2 MIN, PRIOR TO PLATING.
7. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra.
8. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982 (ASME PUBLICATION)
9. DIMENSIONS ARE IN INCHES.
10. DO NOT USE UNASSIGNED PART NUMBERS.

	AEROSPACE STANDARD	AS3554™ SHEET 2 OF 3	REV. B
	NUT, SELF-LOCKING, DOUBLE HEXAGON, SILVER PLATED, REDUCED HEIGHT 180 KSI, 1400 °F, UNS N07001		