

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS39029/14

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/14A(AS) AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/14A(AS). ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029 - 14

THIRD ANGLE PROJECTION



ISSUED 2000-06

PREPARED BY SAE SUBCOMMITTEE AE-8C1

SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR,
SOCKET, CRIMP REMOVABLE, SHIELDED,
(FOR MIL-C-81511 SERIES 2 CONNECTORS)

AS39029/14
SHEET 1 OF 7

Technical drawing of a shield crimp sleeve assembly, showing a main cross-sectional view and two detailed views (Detail A and Detail B).

Main View Dimensions and Labels:

- Overall length: (18.24)
- Reference length: .718(REF)
- Dimensions from left end: .356, .344, .215, .203, .020, .013, .040, .035, .028, .022, .115, .107
- Labels: U, C, D, MATING END, OUTER CONTACT, CRIMP AREA, SEE DETAIL B, CC, A, B
- Angles: 37°, 33°, 11°, 10°, 47°, 43°
- Manufacturer's symbol or trademark (location optional)
- Bin color bands (see Table II)
- Other labels: DD, C, SEE DETAIL A

DETAIL A: INNER CONTACT AND INSULATOR SUBASSEMBLY

DETAIL A Dimensions and Labels:

- Dimensions: .200, .195, .249, .239, .165, .157, .059, .039, .086, .080, .039, .035, .200, .194
- Labels: INNER CONTACT, FULL RADIUS, EE, CRIMP AREA, INSULATOR, FF, AA, BB

DETAIL B: SHIELD CRIMP SLEEVE

DETAIL B Dimensions and Labels:

- Dimensions: .250, .240, HH, HHH

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.

FIGURE 1. CONNECTOR CONTACT.


TABLE I. DIMENSIONS.

BIN code	A	B	C	D	E	AA	BB	CC	DD	EE	FF	HH	HHH	U
	DIA	DIA	DIA	DIA	DIA	DIA	MIN	DIA	DIA	DIA	MIN	MIN	MAX	
158	.103	.0910	.113	.0750	.042	.081	.022	.133 (3.38)	.099	.068	.037	.058	.087	.042
	.101	.0885	.110	.0725		.078		.130 (3.30)	.096	.062				.018
159	.162	.1430	.161	.1210	.070	.128	.022	.190 (4.83)	.145	.076	.067	.086	.130	.042
	.159	.1405	.158	.1175		.126		.187 (4.75)	.142	.070				.018
160	.162	.1430	.161	.1210	.070	.128	.022	.190 (4.83)	.145	.076	.108	.110	.130	.042
	.159	.1405	.158	.1175		.126		.187 (4.75)	.142	.070				.018
161	.162	.1430	.161	.1210	.070	.128	.022	.190 (4.83)	.145	.076	.108	.128	.142	.042
	.159	.1405	.158	.1175		.126		.187 (4.75)	.142	.070				.018
162	.162	.1430	.161	.1210	.070	.128	.034	.190 (4.83)	.145	.089	.098	.128	.142	.042
	.159	.1405	.158	.1175		.126		.187 (4.75)	.142	.085				.018
163	.162	.1430	.161	.1210	.070	.128	.034	.190 (4.83)	.145	.089	.098	.110	.130	.042
	.159	.1405	.158	.1175		.126		.187 (4.75)	.142	.085				.018

STEP 1


- 1A. STRIP FIRST CABLE JACKET BACK 1 INCH.
 1B. IN THE CASES WHERE TRIAXIAL CABLES ARE USED THE SECOND JACKET AND BRAIDED SHIELD SHALL BE STRIPPED BACK AN ADDITIONAL 5/8 INCH.

CAUTION: DO NOT CUT INTO BRAIDED SHIELD

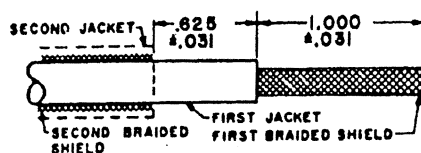


STEP 2

- 2A. SLIDE FIRST BRAIDED SHIELD BACK AND TRIM INSULATION 1/4 INCH.




- 2B. SLIDE FIRST BRAIDED SHIELD FORWARD AND ROLL BETWEEN FINGERS TO REDUCE ITS DIAMETER.
 2C. SLIDE SHIELD CRIMP SLEEVE OVER BRAIDED SHIELD UNTIL IT RESTS AGAINST THE FIRST JACKET.



FOR CABLES USING
 M 39029/14-02, 03
 OR 06 CONTACTS

FOR CABLES USING
 M 39029/14-01, 04
 OR 05 CONTACTS

- 2D. NO CRIMPING NECESSARY
 2E. COMB OUT THE BRAIDED SHIELD AND FOLD IT BACK OVER THE SHIELD CRIMP SLEEVE.



- 2F. TRIM EXCESS BRAIDED SHIELD EXTENDING BEYOND THE SHIELD CRIMP SLEEVE.




STEP 3

- 3A. CUT INNER CONDUCTOR AND INSULATION.




- 3B. STRIP INSULATION FROM INNER CONDUCTOR.



STEP 4

- 4A. RESTORE INNER CONDUCTOR TO ORIGINAL LAY AND INSTALL INTO INNER CONTACT AND INSULATOR SUBASSEMBLY. BUTT CABLE AND CONTACT AS SHOWN.
 4B. CRIMP INNER CONTACT THRU INSULATOR WITH CRIMPING TOOL AND POSITIONER LISTED IN TABLE III.

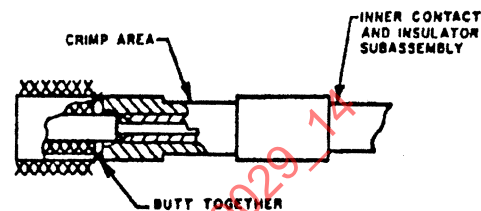

STEP 5

- 5A. INSERT CRIMPED SUBASSEMBLY INTO OUTER CONTACT UNTIL SOLID RESISTANCE IS FELT AND OUTER CONTACT COVERS FIRST BRAIDED SHIELD.
 5B. CRIMP OUTER CONTACT USING CAVITY A IN CRIMPING TOOL.

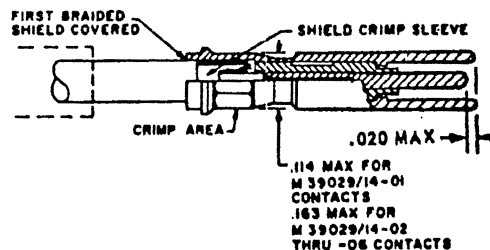


FIGURE 2. ASSEMBLY PROCEDURE.

TABLE II. DESIGN CHARACTERISTICS.

BIN code	Color bands			Contact cavity size	Cables accommodated	Type	Class
	1st	2nd	3rd				
158	Brown	Green	Gray	16	RG-178A/U RG-196A/U	D	B
159	Brown	Green	White	12	RG-179B/U RG-187A/U RG-188A/U		
160	Brown	Blue	Black	12	9530D5117 (RAYCHEM) <u>1/</u>		
161	Brown	Blue	Brown	12	RG-180B/U RG-195A/U 293-3922 (MICRODOT) <u>1/</u>		
162	Brown	Blue	Red	12	250-4070 (MICRODOT) <u>1/</u>		
163	Brown	Blue	Orange	12	5022E5111 (RAYCHEM) <u>1/</u>		

1/ or equivalent

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and tables I and II.

Tools: See table III.

Mating contact: MIL-C-39029/6.

Manufacturer's recommended assembly instructions to be shipped with unit package.

Assembly procedure: See figure 2.

Preparation of samples: Contacts shall be wired as required using wire in accordance with table II (cables accommodated column).

Contact resistance: Contact resistance at a load current of 1.0 ampere shall meet the requirements of table IV.

Contact engagement and separation forces: The contact separation and engagement forces shall meet the requirements of table IV.

Dielectric withstanding voltage: 1,000 volts, ac, rms from sea level to 110,000 feet altitude.

Tensile strength: The tensile strength shall meet the requirements of table IV.