

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

**AS39029/20**

FEDERAL SUPPLY CLASS  
5935

# RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

# NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/20A(AS) AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/20A(AS). ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029-20

THIRD ANGLE PROJECTION



ISSUED 2000-06 REAFFIRMED 2007-06

PREPARED BY SAE SUBCOMMITTEE AE-8C1

**SAE Aerospace**  
An SAE International Group

## AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR,  
SOCKET, CRIMP REMOVABLE, SHIELDED,  
(FOR MIL-C-81511 SERIES 3 CONNECTORS)

**AS39029/20**  
SHEET 1 OF 12

[illegible]

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. The distance between the end of the socket contact sleeve and the point at which a gage pin having a square face and the same basic diameter as the mating pin contact, first engages the contact spring member.
6. Axial concentricity: All diameters to be concentric within .004 TIR except as noted.

FIGURE 1. CONNECTOR CONTACT.

TABLE I. DIMENSIONS.

| BIN code | SHIELD CRIMP SLEEVES |      |                 |          |           |           |                 |           |           |           |                     |                   |           |           |           |           |
|----------|----------------------|------|-----------------|----------|-----------|-----------|-----------------|-----------|-----------|-----------|---------------------|-------------------|-----------|-----------|-----------|-----------|
|          | B<br>MIN             | S    | L<br>(REF)      | T<br>MIN | AA<br>MIN | BB<br>MIN | CC<br>MIN       | DD<br>MAX | EE<br>MIN | TT<br>MIN | SLEEVES<br>REQUIRED | SLEEVE DIMENSIONS |           |           |           |           |
|          |                      |      |                 |          |           |           |                 |           |           |           |                     | HH<br>MAX         | JJ<br>MIN | KK<br>MAX | LL<br>MIN | MM<br>MAX |
| 184      | .034                 | .726 | .994<br>(25.25) | .240     | .094      | .081      | .108<br>(2.74)  | .108      | .0750     | .215      | A & B               | .0535             | .0455     | .080      | .072      | .080      |
|          |                      | .722 |                 |          | .091      |           | .106<br>(2.69)  |           | .0725     |           | B                   | ---               | ---       | .080      | .072      | .080      |
| 185      | .022                 | .716 | .984<br>(24.99) | .225     | .153      | .129      | .1695<br>(4.31) | .169      | .1210     | .200      | NONE                | ---               | ---       | ---       | ---       | ---       |
|          |                      | .712 |                 |          | .150      |           | .1675<br>(4.25) |           | .1175     |           | B                   | ---               | ---       | .128      | .109      | .128      |
| 186      |                      |      |                 |          |           |           |                 |           |           |           | B                   | ---               | ---       | .128      | .113      | .128      |
|          | .034                 | .716 | .984<br>(24.99) | .225     | .153      | .129      | .1695<br>(4.31) | .169      | .1210     | .200      | A                   | .103              | .081      | ---       | ---       | ---       |
|          |                      | .712 |                 |          | .150      |           | .1675<br>(4.25) |           | .1175     |           | B                   | ---               | ---       | .128      | .118      | .128      |
|          |                      |      |                 |          |           |           |                 |           |           |           | A & B               | .099              | .091      | .128      | .118      | .128      |

## ASSEMBLY PROCEDURE (REF)

1. Cut cable to dimension shown in table II. Multiple shield cable must have outer jacket and outer shield removed before stripping.

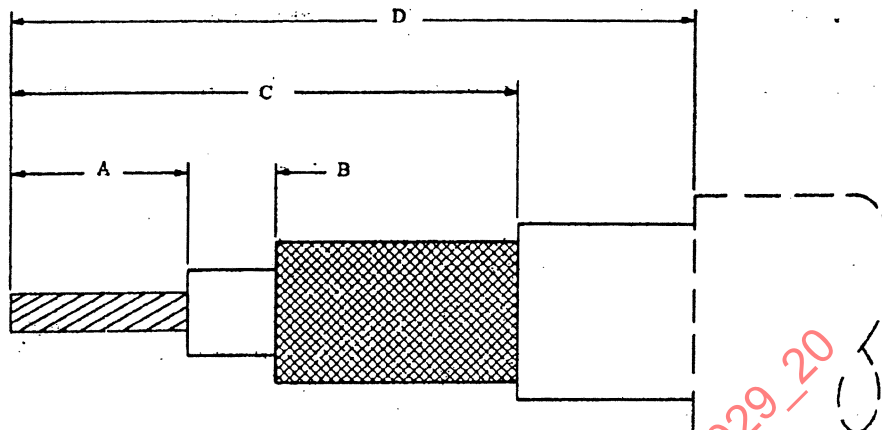


TABLE II. Cable accommodation dimension.

| BIN CODE | CABLE ACCOMMODATION                                        | A                                                           | B $\begin{smallmatrix} +.030 \\ -.000 \end{smallmatrix}$ | C $\begin{smallmatrix} +.030 \\ -.000 \end{smallmatrix}$ | D MIN |
|----------|------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|-------|
| 184      | M81044/18-22<br>SHIELDED<br>GRUMMAN GC18K1-22              | .440 $\begin{smallmatrix} +.030 \\ -.000 \end{smallmatrix}$ | .065                                                     | .655                                                     | -     |
|          | M27500-22RC1S6<br>REVERE WH95623<br>GRUMMAN GC875FW22-2 1/ |                                                             |                                                          |                                                          |       |
| 185      | RG180B/U<br>MICRODOT 293-3922<br>GRUMMAN GC875GA1          | .465 $\begin{smallmatrix} +.000 \\ -.030 \end{smallmatrix}$ | .040                                                     | .675                                                     | 1.440 |
|          | RAYCHEM 9530D5117<br>GRUMMAN GC 875GC1                     | .460 $\begin{smallmatrix} +.000 \\ -.030 \end{smallmatrix}$ | .045                                                     | .675                                                     | 1.440 |
| 186      | M81044/18-22<br>SHIELDED<br>GRUMMAN GC18K1-22              | see item 1.a                                                |                                                          |                                                          |       |
|          | M27500-22RC1S6<br>REVERE WH95623<br>GRUMMAN GC875FW22-2    | see item 1.b                                                |                                                          |                                                          |       |
|          | MICRODOT 250-4070<br>GRUMMAN GC875FY1                      | .135 $\begin{smallmatrix} +.000 \\ -.030 \end{smallmatrix}$ | .040                                                     | .345                                                     | 1.110 |
|          | RAYCHEM 5022E5111<br>GRUMMAN GC875GB1 1/                   | .130 $\begin{smallmatrix} +.000 \\ -.030 \end{smallmatrix}$ | .045                                                     | .345                                                     | 1.110 |


1/ see item 1.c.

Slide shield crimp sleeve over cable to cut end of outer jacket. M39029, 20-02 contact used with RG180B/U, MICRODOT 293-3922 or, GRUMMAN GC875GA1 cable does not require any shield crimp sleeve.

FIGURE 2. ASSEMBLY PROCEDURE.

## ASSEMBLY PROCEDURE (REF)

- 1.a. When using M81044/18-22 or GRUMMAN GC18K1-22 cable with M39029/20-03 contact, cut cable jacket to the shield as shown in figure A. Fold shield back tightly against cut end of jacket and trim insulation from center conductor as shown in figure B. Install shield crimp sleeve "B" over shield as shown in figure C. Trim shield ends flush with sleeve.

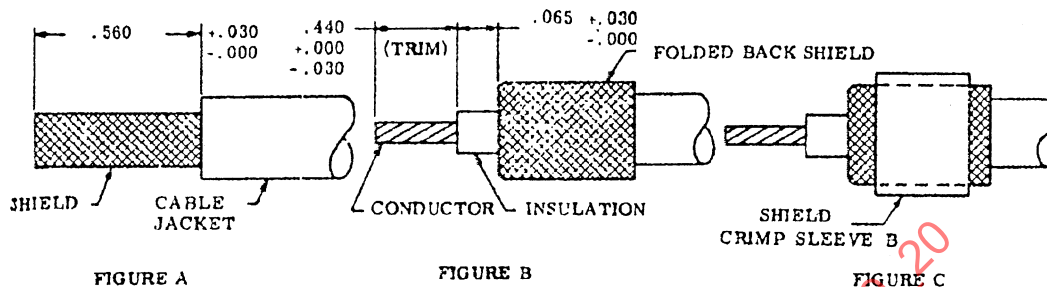

- 1.b. When using 27500-22RC1S6, REVERE WH95623 or GRUMMAN GC875FW22-2 with M39029/20-03 contact, cut cable jacket to shield as shown in figure D. Place shield crimp sleeve "A" over shield and butt against cut end of cable jacket as shown in figure E. Fold shield back tightly over the shield crimp sleeve and trim shield ends flush with the shield crimp sleeve. Trim insulation from center conductor as shown in figure F.

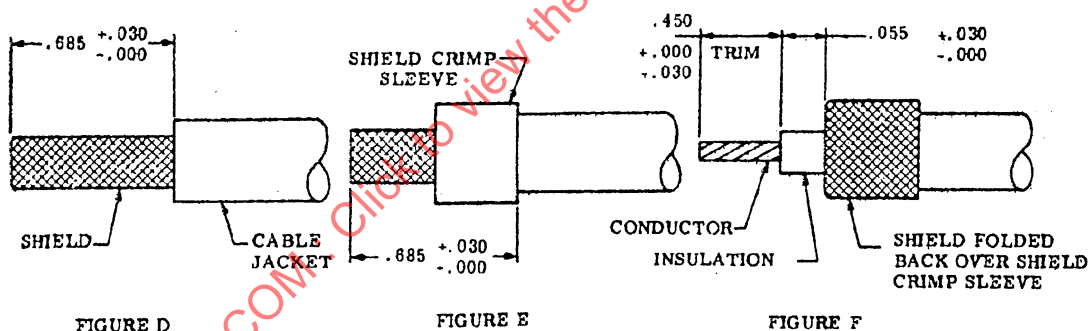


FIGURE 2. ASSEMBLY PROCEDURE. - CONTINUED

## ASSEMBLY PROCEDURE (REF)

- 1.c. When using M81044/18-22 or GRUMMAN GC18K1-22 cable with M39029/20-01 contact or RAYCHEM 5022E5111 or GRUMMAN GC875GB1 cable with M39029/20-03 contact, shield crimp sleeves "A" and "B" are used. Insert sleeve "A" between the insulation and the shield until shield crimp sleeve "A" is flush with the end of the shield. Slide shield crimp sleeve "B" back over the shield until it is flush with both the shield and crimp sleeve "A". (See figure G).

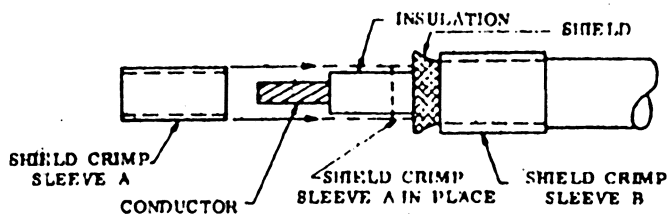


FIGURE G

2. Butt spacer against cable insulation and install inner contact on cable conductor.



- 2.a. M39029/20-01. Crimp inner contact in accordance with table IV. Push contact insulator over the inner contact until contact bottoms in the contact insulator or the contact insulator butts against the spacer.


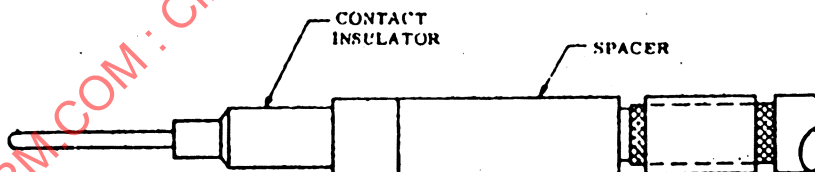



FIGURE 2. ASSEMBLY PROCEDURE. - CONTINUED

## ASSEMBLY PROCEDURE (REF)

- 2.b M39029/20-02 and M39029/20-03. Crimp inner contact through contact insulator in accordance with table IX.

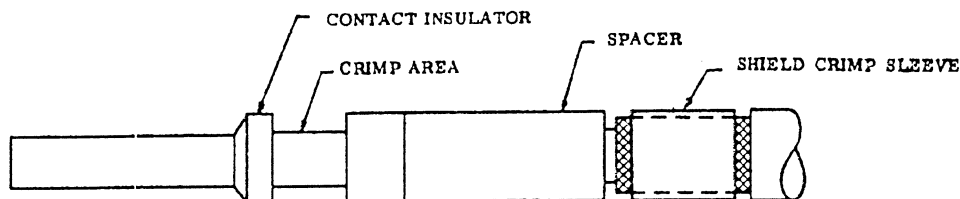

3. Butt the shield crimp sleeve against the spacer and crimp the shield crimp sleeve in accordance with table IX. This crimp is not required when using M39029/19-02 contact with cables RG-180B/U, MICRODOT 293-3922, and GRUMMAN GC875GA1 which uses no shield crimp sleeves, or M39029/19-03 contact with cables M27500-22RCIS6, REVERE WH95623, and GRUMMAN GC875FW-22-2, which uses only shield crimp sleeve "A".

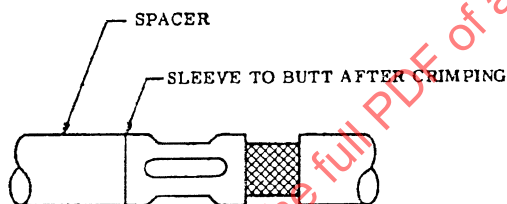

4. Install the inner contact and cable assembly into the outer contact. Push on cable until inner contact seats within outer contact. Press cable into outer contact while crimping the outer contact. Inspect for proper assembly in accordance with the figure below.

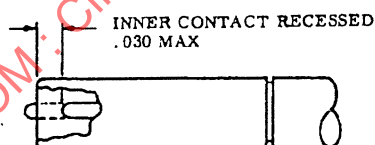


FIGURE 2. ASSEMBLY PROCEDURE. - CONTINUED

TABLE III. DESIGN CHARACTERISTICS.

| RTN code | Color bands |      |        | Contact cavity size | Cables accommodated 1/                                | Sleeves required | Type | Class |
|----------|-------------|------|--------|---------------------|-------------------------------------------------------|------------------|------|-------|
|          | 1st         | 2nd  | 3rd    |                     |                                                       |                  |      |       |
| 184      | Brown       | Gray | Yellow | 16                  | M81044/18-22 SHIELDED GRUMMAN GC18K1-22               | A & B            |      |       |
|          |             |      |        |                     | M27500-22RC1S6 REVERE WH95623 2/ GRUMMAN GC875FW22-2  | B                |      |       |
| 185      | Brown       | Gray | Green  | 12                  | RG-180B/U 3/ MICRO DOT 293-3922 GRUMMAN GC875GA1      | None             |      |       |
|          |             |      |        |                     | RAYCHEM 9530D5117 GRUMMAN GC875GC1                    | B                |      |       |
| 186      | Brown       | Gray | Blue   | 12                  | M81044/18-22 SHIELDED GRUMMAN GC18K1-22               | B                |      |       |
|          |             |      |        |                     | M27500-22RC1S6 REVERE WH95623 2/ GRUMMAN GC875FW-22-2 | A                |      |       |
|          |             |      |        |                     | MICRO DOT 250-4070 GRUMMAN GC875FY2                   | B                |      |       |
|          |             |      |        |                     | RAYCHEM 5022E5111 GRUMMAN GC875GB1                    | A & B            |      |       |

1/ or equivalent

2/ Revere WH95623 is a two conductor cable: One AWG22 wire and one AWG22 shielded conductor conforming to M27500-22RC1S6.

3/ RG-180B/U may be used when impedance matching is not required.

TABLE IV. INNER CONTACT AND SHIELD CRIMP SLEEVE TOOLING.

| BIN code | Inner contact tooling |             | Shield crimp sleeve tooling |                     |                    |
|----------|-----------------------|-------------|-----------------------------|---------------------|--------------------|
|          | Basic crimping tool   | Positioner  | Positioner setting          | Basic crimping tool | Positioner setting |
| 184      | M22520/2-01           | M22520/2-28 | 4                           | M22520/20-01        | M22520/20-03       |
|          | M22520/2-01           | M22520/2-28 | 4                           | M22520/20-01        | M22520/20-03       |
| 185      | M22520/2-01           | M22520/2-29 | 1                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 1                           | M22520/22-01        | M22520/22-03       |
| 186      | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |
|          | M22520/2-01           | M22520/2-29 | 4                           | M22520/22-01        | M22520/22-03       |