



SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	RATIONALE THE C1 COMMITTEE HAS RECOMMENDED STABILIZATION OF THIS DOCUMENT BASED ON NO QPL SOURCES AND NO KNOWN USAGE. ANY EDITORIAL OR TECHNICAL CHANGES NEEDED TO ALIGN THIS DOCUMENT WITH SIMILAR CURRENTLY PUBLISHED DETAIL SHEETS SHALL BE MADE AT SUCH TIME A POTENTIAL SOURCE REQUESTS AUTHORIZATION TO QUALIFY TO THIS DOCUMENT. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8C1 CONNECTORS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		FEDERAL SUPPLY CLASS 5999	
			AS39029/20	
SAENORM.COM : Click to view the full PDF of as39029_20b				
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS39029/20B		THIRD ANGLE PROJECTION 		
CUSTODIAN: AE-8/AE-8C1		PROCUREMENT SPECIFICATION: AS39029		
		AEROSPACE STANDARD CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, SHIELDED (FOR MIL-C-81511 SERIES 3 CONNECTORS)		AS39029/20
				REV. B

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS39029.

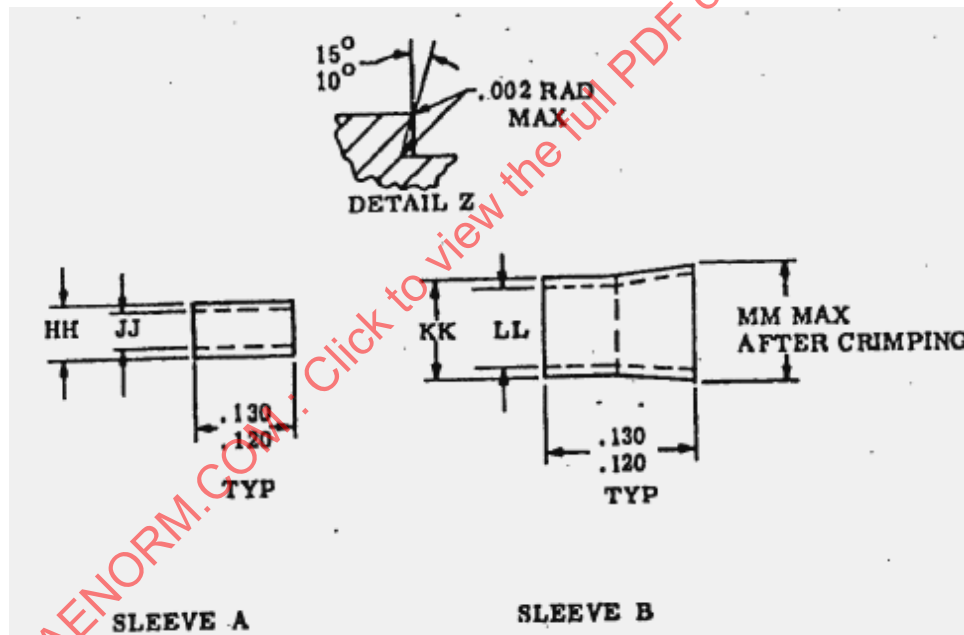

Technical drawing of a sleeve assembly. The top view shows a cross-section of the sleeve with dimensions: .020 MAX RECESSED, .115 MIN, .130, .120, and .002 Y. 002. The bottom view shows a cross-section of the sleeve with dimensions: .130, .120, and .002 Y. 002. The side view shows a cross-section of the sleeve with dimensions: .130, .120, and .002 Y. 002. The detail view Z shows a cross-section of the sleeve with dimensions: 15°, 10°, .002 RAD MAX, and DETAIL Z.

TABLE 1 - CONTACT DIMENSIONS (1/)

BIN code	B MIN	S	L (REF)	T MIN	AA	BB MIN	CC	DD MAX	EE	TT MIN	SHIELD CRIMP SLEEVES					
											SLEEVES REQUIRED	SLEEVE DIMENSIONS				
												HH MAX	JJ MIN	KK MAX	LL MIN	MM MAX
184	.034	.726 .722	.994 (25.25)	.240	.094 .091	.081	.108 (2.74) .106 (2.69)	.108	.0750 .0725	.215	A & B	.0535	.0455	.080	.072	.080
											B	---	---	.080	.072	.080
185	.022	.716 .712	.984 (24.99)	.225	.153 .150	.129	.1695 (4.31) .1675 (4.25)	.169	.1210 .1175	.200	NONE	---	---	---	---	---
											B	---	---	.128	.109	.128
186	.034	.716 .712	.984 (24.99)	.225	.153 .150	.129	.1695 (4.31) .1675 (4.25)	.169	.1210 .1175	.200	B	---	---	.128	.113	.128
											A	.103	.081	---	---	---
											B	---	---	.128	.118	.128
											A & B	.099	.091	.128	.118	.128

NOTE 1/ INNER CONTACT DIMENSIONS ARE CONTROLLED BY PERFORMANCE ONLY (SEE TABLE 3).

TABLE 2 - MARKING AND DESIGN CHARACTERISTICS

BIN code	Color bands			Contact cavity size	Cables accommodated ^{1/}	Sleeves required	Type	Class
	1st	2nd	3rd					
184	Brown	Gray	Yellow	16	M81044/18-22 SHIELDED GRUMMAN GC18K1-22	A & B	D	B
					M27500-22RC1S6 REVERE WH95623 2/ GRUMMAN GC875FW22-2	B		
185	Brown	Gray	Green	12	RG-180B/U 3/ MICRO DOT 293-3922 GRUMMAN GC875GA1	None		
					RAYCHEM 9530D5117 GRUMMAN GC875GC1	B		
186	Brown	Gray	Blue	12	M81044/18-22 SHIELDED GRUMMAN GC18K1-22	B		
					M27500-22RC1S6 REVERE WH95623 2/ GRUMMAN GC875FW-22-2	A		
					MICRO DOT 250-4070 GRUMMAN GC875FY2	B		
					RAYCHEM 5022E5111 GRUMMAN GC875GB1	A & B		

1/ OR EQUIVALENT (M81044/18-22 IS CANCELED WITHOUT REPLACEMENT).

2/ REVERE WH95623 IS A TWO CONDUCTOR CABLE: ONE SIZE 22 SHIELDED CONDUCTOR CONFORMING TO M27500-22RC1S6.

3/ RG-108B/U MAY BE USED WHEN IMPEDANCE MATCHING IS NOT REQUIRED.

**AEROSPACE STANDARD**CONTACTS, ELECTRICAL CONNECTOR,
SOCKET, CRIMP REMOVABLE, SHIELDED
(FOR MIL-C-81511 SERIES 3 CONNECTORS)**AS39029/20**
SHEET 2 OF 5**REV.**
B

TABLE 3 - TOOL REQUIREMENTS

BIN CODE	INNER CONTACT 1/			SHIELD SLEEVE			
	BASIC CRIMPING TOOL	POSITIONER	POSITIONER SETTING	BASIC CRIMPING TOOL	POSITIONER	POSITIONER SETTING	SLEEVE TYPE
184	M22520/2-01	M22520/2-28	4	M22520/20-01	M22520/20-03	3 4	A & B C
185	M22520/2-01	M22520/2-29	1	M22520/22-01	M22520/22-03	4 5	NONE B
186	M22520/2-01	M22520/2-29	4	M22520/22-01	M22520/22-03	4 5 6	B A B
						5	A & B
						5	A & B

NOTE 1/ INNER CONTACT DIMENSIONS ARE CONTROLLED BY PERFORMANCE ONLY. INNER CONTACT TOOLS SHALL BE AS SPECIFIED.

TABLE 3 - TOOL REQUIREMENTS (CONTINUED)

BIN CODE	OUTER CONTACT			INSTALLING TOOL	REMOVAL TOOL	
	BASIC CRIMPING TOOL	POSITIONER	POSITIONER SETTING		WIRED CONTACT	UNWIRED CONTACT
184	M22520/19-01	M22520/19-02	3 4	M81969/16-02	M81969/16-02	M81969/30-03
185	M22520/21-01	M22520/21-02	5 3	M81969/16-03	M81969/16-03	M81969/30-04
186	M22520/21-01	M22520/21-02	4 6 6			
			5			
			5			

TABLE 4 - PART NUMBERS

AS39029 PART NUMBER	BIN CODE	SUPERSEDES PART NUMBER(S)
M39029/20-184	184	M39029/20-001
M39029/20-185	185	M39029/20-002
M39029/20-186	186	M39029/20-003

TABLE 5 - PERFORMANCE REQUIREMENTS

BIN CODE	TENSILE STRENGTH (LB) MIN		CONTACT ENGAGING AND SEPARATION FORCES (OUNCES)				MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	
			OUTER SOCKET CONTACT					
	INNER CONTACT	OUTER CONTACT	SEPARATION	TEST PIN DIAMETER	ENGAGEMENT	TEST PIN DIAMETER	INNER CONTACT	OUTER CONTACT
184	2.7	15	2.0	.0690 +.0000 -.0001	20.0	.0710 +.0001 -.0000	8.0	4.0
185	4.5		3.0	.1140 +.0000 -.0001	25.0	.1165 +.0001 -.0000		2.0
186	2.7							



AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR,
SOCKET, CRIMP REMOVABLE, SHIELDED
(FOR MIL-C-81511 SERIES 3 CONNECTORS)

AS39029/20
SHEET 3 OF 5

REV.
B