

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS39029/26

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/26C, NOTICE 2 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/26C, NOTICE 2. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029_26

THIRD ANGLE PROJECTION



ISSUED 2001-03

PREPARED BY SAE SUBCOMMITTEE AE-8C1


SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD


CONTACTS, ELECTRICAL CONNECTOR,
SOCKET, CRIMP REMOVABLE, SHIELDED,
(FOR MIL-C-26482 SERIES 1 CONNECTORS)

AS39029/26
SHEET 1 OF 8




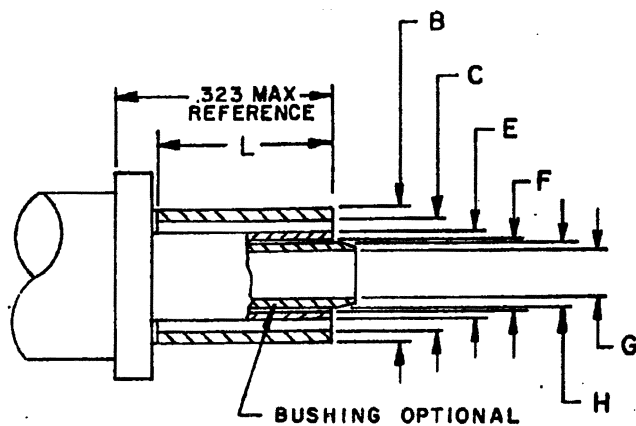

DETAIL X WIRE TERMINATION END
BIN CODES 207 & 209

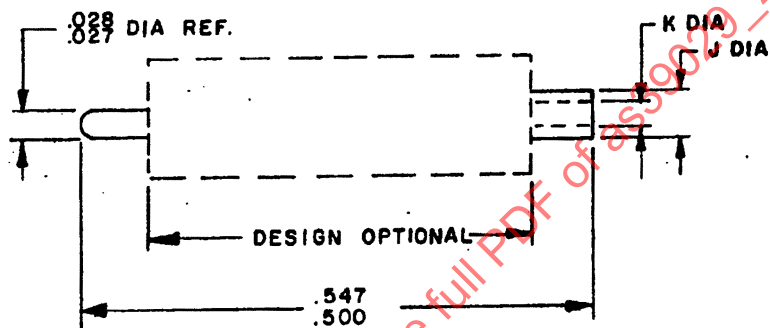

INNER CONTACT

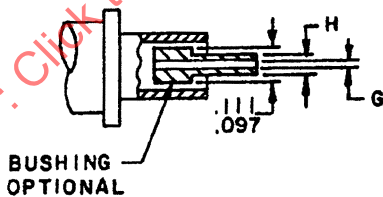

DETAIL Y WIRE TERMINATION END
BIN CODE 208

FIGURE 1. CONNECTOR CONTACT. - CONTINUED

BIN code	B	C	E	F	G	H	J	K	L
207	.201 (5.11) .189 (4.80)	.161 (4.09) .151 (3.84)	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.069 (1.75) .065 (1.65)	.106 (2.69) .102 (2.59)	.055 (1.40) .045 (1.14)	.030 (.76) .020 (.51)	.270 (6.86) .230 (5.84)
208	---	---	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.047 (1.19) .037 (.94)	.076 (1.93) .066 (1.68)	.055 (1.40) .045 (1.14)	.030 (.76) .020 (.51)	.330 (8.38) .290 (7.37)
209	.201 (5.11) .189 (4.80)	.161 (4.09) .151 (3.84)	.136 (3.45) .126 (3.20)	.1150 (2.92) .1065 (2.70)	.058 (1.47) .055 (1.40)	.106 (2.69) .102 (2.59)	.067 (1.70) .057 (1.45)	.044 (1.12) .034 (.86)	.270 (6.86) .230 (5.84)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Indicated dimension to be from front end of contact to point of engagement of socket and a .113 (2.87 mm) diameter square end pin.
6. Indicated diameter applies for indicated length.

FIGURE 1. CONNECTOR CONTACT. - CONTINUED

BIN code	A	B	C
207 209	.468	.250	.156
208	.625	.250	.156

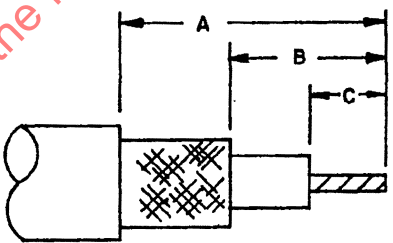


FIGURE 2. CABLE STRIPPING DIMENSIONS.

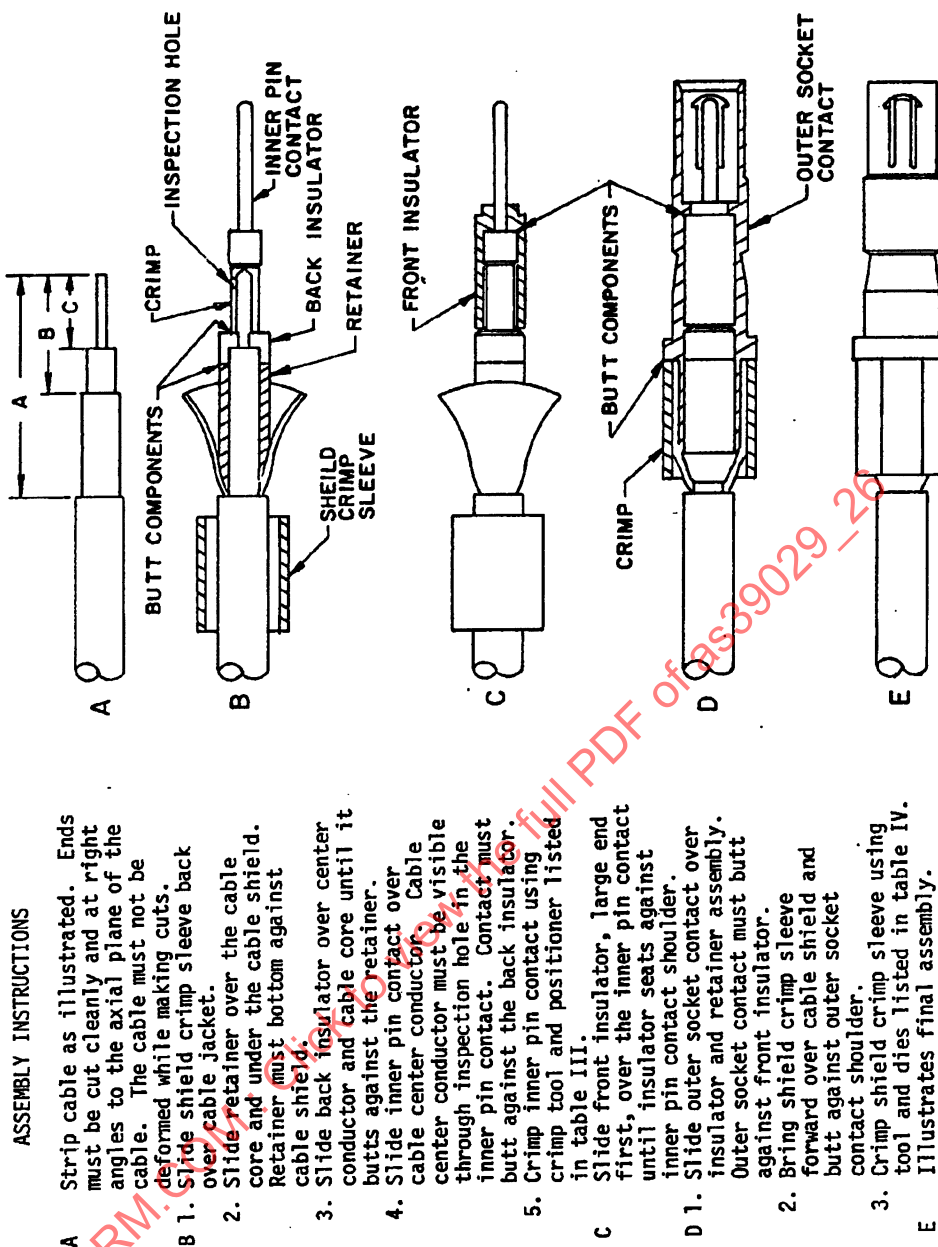


FIGURE 3. ASSEMBLY PROCEDURE.

REQUIREMENTS:**Design and construction:**

Dimensions and configuration: See figure 1 and tables I and II.

Tools: See table III.

Assembly procedure: See figure 3. Manufacturer's recommended shipping instructions shall be shipped with the unit package.

Mating contact: See table I.

Cable stripping: See figure 2.

Cable accommodation: See table I.

Low signal level contact resistance (inner contact only): See table IV.

Contact resistance: See table V.

Contact engagement and separation force: The engagement depth shall be as encountered in normal service. The test pins shall be in accordance with MS3197, except the diameters shall be as specified in table VI and surface roughness shall not exceed 3.

Crimp tensile strength (inner and outer contact crimp joint): See table VII.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Dielectric withstanding voltage: Applied between inner and outer contact: See table VIII.

Part number: See table IX.

QPL evaluating activity: Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218.

International interest: NEPR 57.

TABLE I. REFERENCE DATA.

BIN code	Cable data					Mating contact M39029/25-
	Cable accommodated	O.D. of jacket	Number of shields	Dielectric O.D.	Inner conductor size	
207	M17/119-RG174	.100	1	.060	No. 26 AWG 7/.0067	204
	M17/094-RG179	.105	1	.063	No. 30 AWG 7/.004	
	M17/113-RG316	.102	1	.060	No. 26 AWG 7/.0067	
208	M17/093-RG178	.071	1	.034	No. 30 AWG 7/.004	205
209	No. 22 shielded MIL-C-27500	.094 max	1	.048	No. 22 AWG 19/.0063	206

TABLE II. DESIGN CHARACTERISTICS.

Dash No. and BIN code	Color bands			Contact cavity size	Type	Class
	1st	2nd	3rd			
207	Red	Black	Violet	12	} D	} A
208	Red	Black	Gray	12		
209	Red	Black	White	12		