

AS4375

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

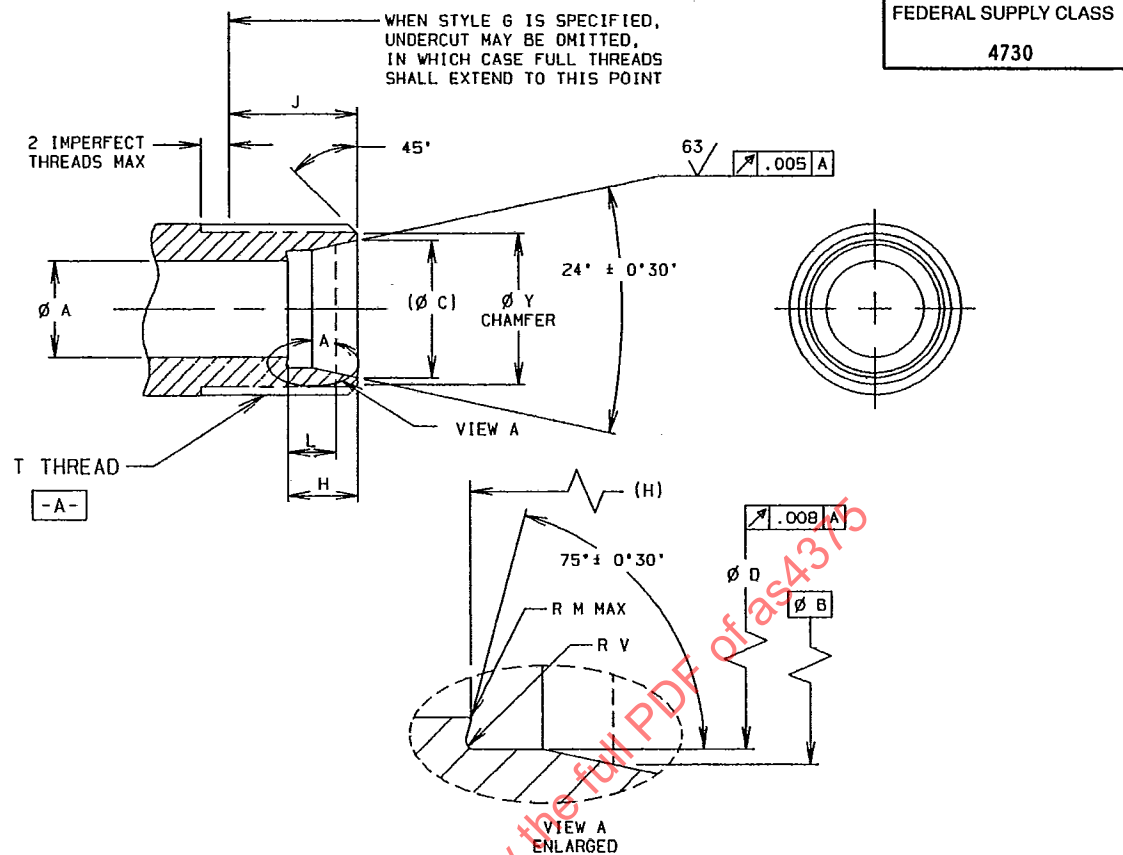
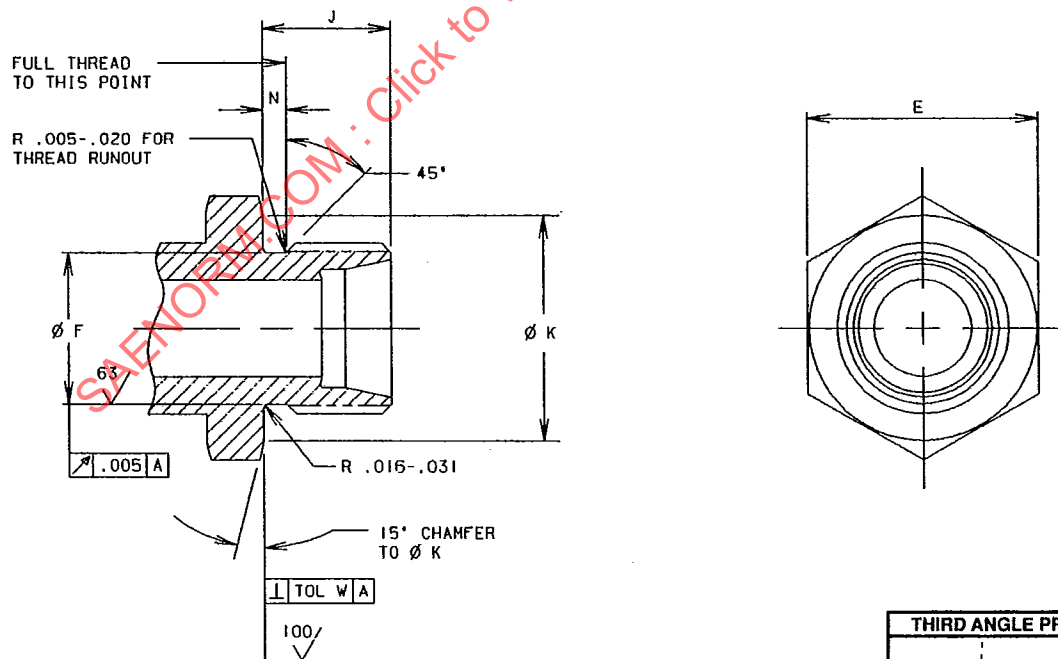


FIGURE 1 - FITTING END DESIGN, STYLE G

FIGURE 2 - FITTING END DESIGN, STYLE E
SAME AS STYLE G EXCEPT AS SHOWN

CUSTODIAN: SAE G-3/G-3B

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

FITTING END,
EXTERNAL THREAD, FLARELESS
DESIGN STANDARD

AS4375

SHEET 1 OF 3

ISSUED 1992-07-30 REVISED

AS4375

TABLE 1A - DIMENSIONS A-F

BASIC NO. AS4375 /8/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879	A $\pm .003$	B	C	D +.004 -.000	E	F +.002 -.003
02	.125	.3125-24UNJF-3A	.093	.1630	.189	.135	.552-.565	.250
03	.187	.3750-24UNJF-3A	.125	.2340	.267	.196	.615-.628	.312
04	.250	.4375-20UNJF-3A	.187	.2930	.319	.261	.678-.691	.364
05	.312	.5000-20UNJF-3A	.234	.3560	.382	.324	.740-.753	.426
06	.375	.5625-18UNJF-3A	.297	.4160	.441	.386	.802-.816	.481
08	.500	.7500-16UNJF-3A	.422	.5600	.601	.514	.990-1.003	.660
10	.625	.8750-14UNJF-3A	.500	.6860	.727	.641	1.115-1.128	.773
12	.750	1.0625-12UNJ -3A	.656	.8100	.852	.766	1.365-1.380	.945
14	.875	1.1875-12UNJ -3A	.765	.9360	.977	.891	1.490-1.505	1.070
16	1.000	1.3125-12UNJ -3A	.875	1.0620	1.102	1.016	1.615-1.630	1.195
20	1.250	1.6250-12UNJ -3A	1.093	1.3160	1.355	1.270	1.865-1.880	1.507
24	1.500	1.8750-12UNJ -3A	1.344	1.5650	1.604	1.520	2.115-2.135	1.756
32	2.000	2.5000-12UNJ -3A	1.813	2.0680	2.108	2.022	2.740-2.760	2.381

TABLE 1B - DIMENSIONS H-Y

BASIC NO. AS4375 /8/ SIZE CODE	H $\pm .003$	J	K	L $\pm .005$	M	N +.015 -.000	V	W MAX	Y
02	.188	.375	.542	.128	.005	.063	.005-.010	.002	.250
03	.234	.422	.605	.158	.005	.063	.010-.015	.002	.310
04	.234	.453	.668	.174	.005	.075	.010-.015	.002	.365
05	.250	.453	.730	.190	.010	.075	.010-.015	.002	.425
06	.250	.469	.792	.193	.010	.083	.010-.015	.002	.480
08	.305	.562	.980	.210	.010	.094	.010-.015	.002	.660
10	.350	.625	1.105	.255	.010	.107	.010-.015	.002	.775
12	.350	.688	1.355	.253	.010	.125	.010-.015	.003	.945
14	.356	.688	1.480	.260	.010	.125	.010-.015	.003	1.070
16	.415	.688	1.605	.322	.010	.125	.010-.015	.003	1.195
20	.415	.688	1.855	.325	.015	.125	.020-.030	.003	1.505
24	.485	.688	2.105	.390	.015	.125	.020-.030	.003	1.755
32	.485	.688	2.730	.395	.015	.125	.020-.030	.003	2.380