

NOTICE OF ADOPTION

ADOPTION NOTICE 1
27 August 1993
AS 4396-91
18 OCTOBER 1991

This non-Government document was adopted on 27 August 1993 and is approved for use by DoD. The indicated industry group has furnished the clearance required by existing regulations. Copies of the document are stocked by Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094, for use to DoD activities only. Contractors and industry groups must obtain copies directly from Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001.

Title of Document: Fitting End - Bulkhead Flared Tube Connection,
Design Standard

Document No.: AS 4396

Date of Specific Issue Adopted: 18 October 1991

Releasing Industry Group: Society of Automotive Engineers, Inc.

NOTE: When reaffirmation, amendment, revision or cancellation of this standard is initially proposed, the industry group responsible for this standard shall inform the military coordinating activity of the proposed change and request participation.

Custodian:
Air Force - 99
Navy - AS

Military Coordinating Activity:
Air Force - 82
(Project No. 4730-0253)

Reviewing activity:
DLA - CS

User:
Army - AR

AMSC N/A

FSC 4730

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

AS4396

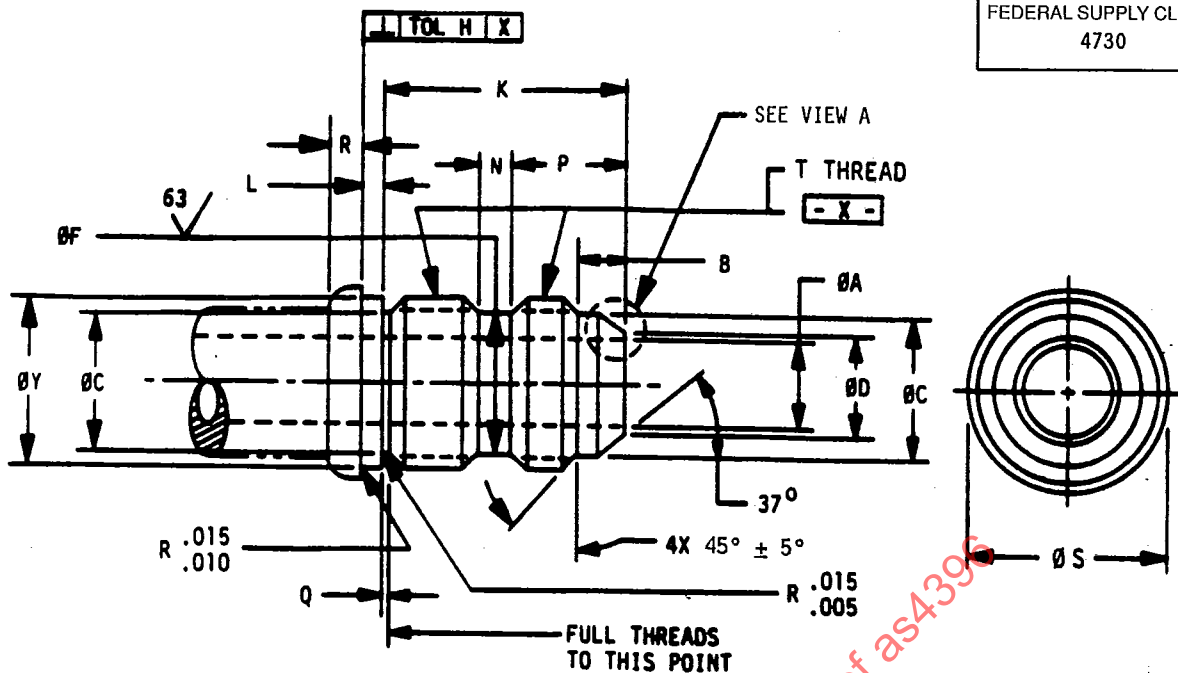
FEDERAL SUPPLY CLASS
4730

FIGURE 1 - FITTING END - STYLE S

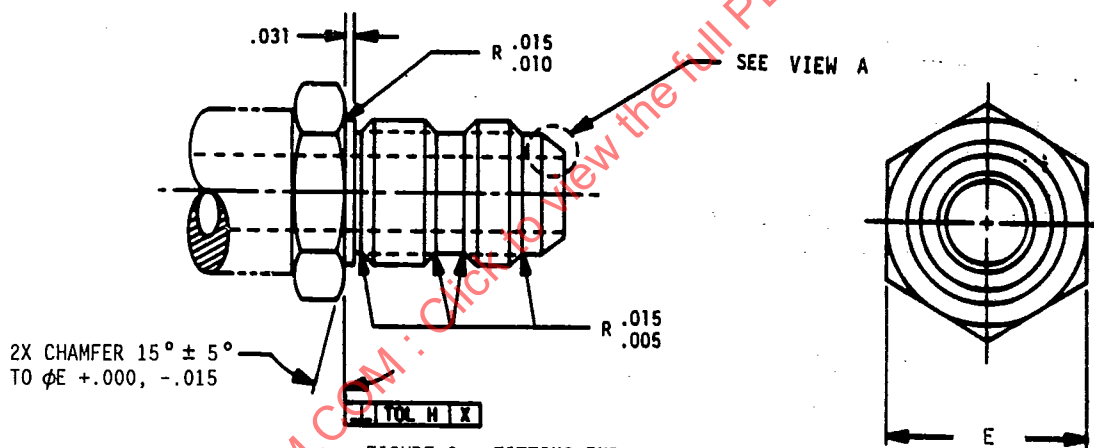
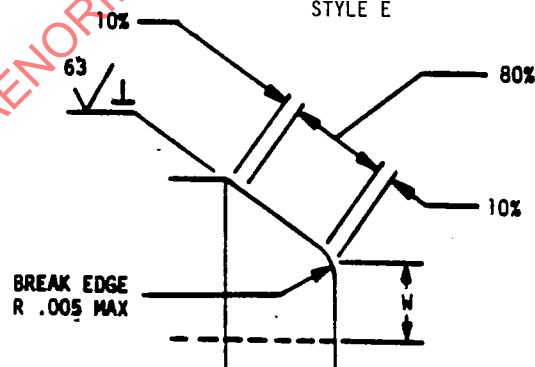

FIGURE 2 - FITTING END -
STYLE E

FIGURE 3 - ENLARGED VIEW A

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

FITTING END - BULKHEAD
FLARED TUBE CONNECTION,
DESIGN STANDARD

AS4396

SHEET 1 OF 3

ISSUED 1991-10-18 REVISED

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS4396

TABLE 1 - DIMENSIONS

SIZE NO.	TUBING OD	T THREAD MIL-S-8879	A	B +0.015/-0.000	C +0.000/-0.005	D +0.003	E	F +0.002/-0.003	H MAX
02	0.125	0.3125-24UNJF-3A	0.065 - 0.058	0.177	0.245	0.083	0.566 - 0.559	0.250	0.005
03	0.188	0.3750-24UNJF-3A	0.128 - 0.121	0.177	0.307	0.146	0.628 - 0.621	0.312	0.005
04	0.250	0.4375-20UNJF-3A	0.175 - 0.168	0.193	0.359	0.193	0.691 - 0.684	0.364	0.005
05	0.312	0.5000-20UNJF-3A	0.237 - 0.230	0.193	0.421	0.255	0.753 - 0.746	0.426	0.005
06	0.375	0.5625-18UNJF-3A	0.301 - 0.293	0.198	0.476	0.318	0.816 - 0.809	0.481	0.005
08	0.500	0.7500-16UNJF-3A	0.395 - 0.387	0.253	0.654	0.426	1.003 - 0.996	0.660	0.005
10	0.625	0.8750-14UNJF-3A	0.488 - 0.480	0.266	0.767	0.539	1.128 - 1.121	0.773	0.005
12	0.750	1.0625-12UNJ-3A	0.614 - 0.604	0.315	0.938	0.664	1.378 - 1.371	0.945	0.008
16	1.000	1.3125-12UNJ-3A	0.851 - 0.839	0.315	1.188	0.913	1.641 - 1.609	1.195	0.008
20	1.250	1.6250-12UNJ-3A	1.086 - 1.073	0.367	1.501	1.147	1.891 - 1.859	1.507	0.008
24	1.500	1.8750-12UNJ-3A	1.320 - 1.307	0.378	1.750	1.381	2.145 - 2.105	1.756	0.008
28	1.750	2.2500-12UNJ-3A	1.557 - 1.542	0.451	2.125	1.646	2.520 - 2.480	2.131	0.008
32	2.000	2.5000-12UNJ-3A	1.791 - 1.776	0.461	2.375	1.880	2.770 - 2.730	2.381	0.008
40	2.500	3.0000-12UNJ-3A	2.291 - 2.276	0.395	2.882	2.380	3.270 - 3.230	2.881	0.008
48	3.000	3.5000-12UNJ-3A	2.791 - 2.776	0.395	3.382	2.880	3.770 - 3.730	3.381	0.008

TABLE 2 - DIMENSIONS

SIZE NO.	K	L	N +0.010/-0.000	P +0.005	Q +0.015/-0.000	R	S	W MIN	Y MAX	Y MIN
02	0.922	0.094	0.125	0.385	0.063	0.109	0.438	0.005	0.3125	0.3053
03	0.922	0.094	0.131	0.385	0.063	0.109	0.500	0.005	0.3750	0.3678
04	1.016	0.094	0.140	0.443	0.075	0.125	0.562	0.005	0.4375	0.4294
05	1.016	0.094	0.140	0.443	0.075	0.125	0.625	0.005	0.5000	0.4919
06	1.094	0.094	0.156	0.476	0.083	0.141	0.688	0.005	0.5625	0.5538
08	1.250	0.125	0.187	0.565	0.094	0.156	0.875	0.012	0.7500	0.7406
10	1.391	0.125	0.219	0.623	0.107	0.172	1.000	0.022	0.8750	0.8647
12	1.562	0.125	0.234	0.732	0.125	0.188	1.188	0.022	1.0625	1.0511
16	1.562	0.125	0.234	0.732	0.125	0.188	1.438	0.029	1.3125	1.3011
20	1.609	0.125	0.234	0.784	0.125	0.188	1.750	0.029	1.6250	1.6136
24	1.625	0.125	0.234	0.795	0.125	0.188	2.000	0.029	1.8750	1.8636
28	1.781	0.125	0.234	0.868	0.125	0.188	2.375	0.044	2.2500	2.2386
32	1.906	0.125	0.234	0.878	0.125	0.188	2.625	0.044	2.5000	2.4886
40	1.719	0.125	0.234	0.895	0.125	0.188	3.125	0.044	3.0000	2.9886
48	1.812	0.125	0.234	0.978	0.125	0.188	3.625	0.044	3.5000	3.4886