

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

SAE AS4477

FEDERAL SUPPLY CLASS
4720

RATIONALE

AS4477B HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

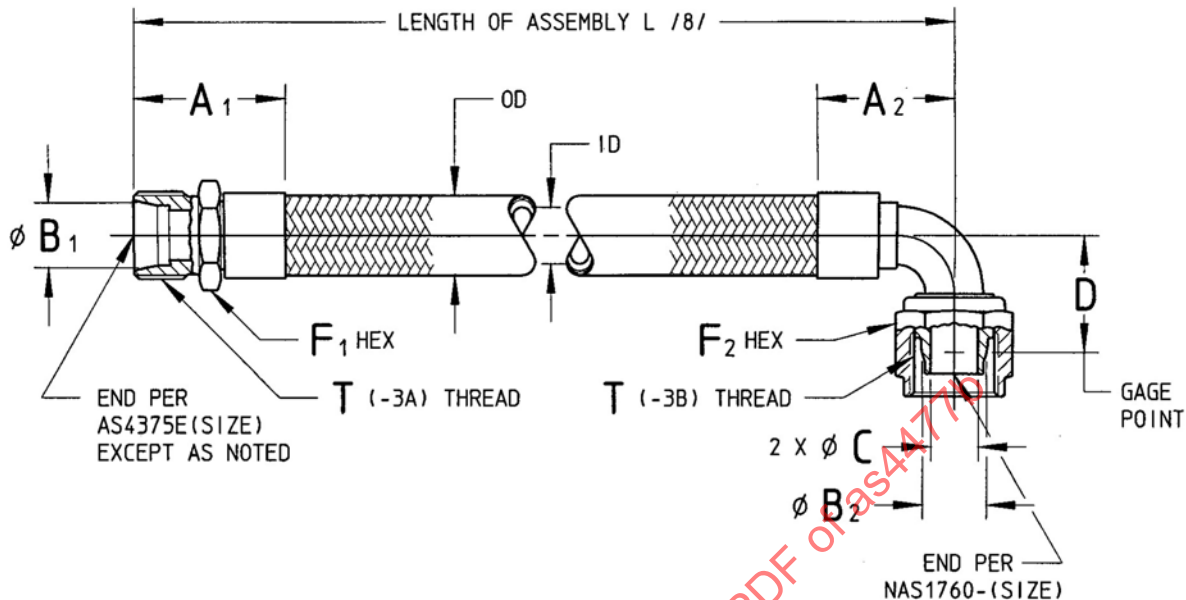



FIGURE 1 - HOSE ASSEMBLY

TABLE 1 - HOSE ASSEMBLY DIMENSIONS

BASIC NO. AND SIZE CODE	HOSE SIZE (REF)	F ₁ HEX ACROSS FLATS (REF)	F ₂ HEX ACROSS FLATS (REF)	ID (REF)	OD MIN	OD MAX
AS4477-04	.250	.50	.56	.250	.37	.48
AS4477-06	.375	.62	.69	.375	.53	.59
AS4477-08	.500	.81	.88	.500	.65	.73
AS4477-10	.625	.94	1.00	.625	.81	.85
AS4477-12	.750	1.12	1.25	.750	.94	.98
AS4477-16	1.000	1.36	1.50	1.000	1.19	1.23

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS4477B>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS4468 /2/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

HOSE ASSEMBLY, LINED SILICONE,
125 PSI, FLARELESS, POTABLE WATER,
STRAIGHT MALE TO 90° FEMALE

SAE AS4477
SHEET 1 OF 3

REV.
B

ISSUED 1992-05 REVISED 2007-08 REAFFIRMED 2013-01

TABLE 2 - END FITTING DIMENSIONS

BASIC NO. AND SIZE CODE	THREAD T PER AS8879 (REF)	A ₁ MAX	A ₂ MAX	B ₂ GAGE	B ₁ GAGE	C (REF)	D MIN	D MAX
AS4477-04	.4375-20UNJF-3B/A	1.33	1.24	.2930	.2930	.174	.66	.81
AS4477-06	.5625-18UNJF-3B/A	1.39	1.32	.4120	.4160	.291	.75	.85
AS4477-08	.7500-16UNJF-3B/A	1.48	1.44	.5600	.5600	.409	.98	1.11
AS4477-10	.8750-14UNJF-3B/A	1.66	1.58	.6730	.6860	.495	1.21	1.33
AS4477-12	1.0625-12UNJ-3B/A	1.87	2.05	.8100	.8100	.646	1.37	1.57
AS4477-16	1.3125-12UNJ-3B/A	1.89	2.17	1.0620	1.0620	.872	1.62	1.76

TABLE 3 - LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	PREFERRED INCREMENTS	TOLERANCE
UNDER 18 IN	(NOT LESS THAN) .125	+ .125/- .125
18 TO 36 IN EXCLUSIVE	(NOT LESS THAN) .250	+ .250/- .250
36 TO 100 IN EXCLUSIVE	(NOT LESS THAN) .500	+ .375/- .375
100 IN AND OVER	(NOT LESS THAN) 1.000	+ .5%/- .500

TABLE 4 - HOSE ASSEMBLY WEIGHT INFORMATION

HOSE SIZE CODE	HOSE LB/IN NOM (REF)	END FITTING LB/EA AS4375 NOM (REF)	END FITTING LB/EA NAS1760 NOM (REF)	HOSE LENGTH CORRECTION FACTOR, INCH /9/ AS4375	HOSE LENGTH CORRECTION FACTOR, INCH /9/ NAS1760
04	.0038	.029	.050	.73	.61
06	.0064	.043	.077	.77	.64
08	.0081	.075	.125	.90	.77
10	.0111	.102	.176	.99	.95
12	.0137	.177	.295	1.09	1.26
16	.0182	.241	.419	1.13	1.39

NOTES:

1. MATERIAL AND FINISH: PER AS4468, TABLE 1. ALL FITTING COMPONENTS 300 SERIES CORROSION RESISTANT STEEL, PASSIVATED.
2. PROCUREMENT SPECIFICATION: AS4468 EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED AND ASSEMBLED BY AN ACCREDITED MANUFACTURER OR ASSEMBLED BY AN ACCREDITED DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) PRI QPL AS4468 FOR THIS STANDARD. SEE www.eauditnet.com FOR CURRENT QPL ON LINE.
3. INTENDED USE: THESE HOSE ASSEMBLIES ARE INTENDED FOR USE IN POTABLE WATER SYSTEM INSTALLATIONS WHERE A HIGH DEGREE OF FLEXIBILITY IS REQUIRED.
4. IDENTIFICATION: PER AS4468.