

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS4624

FEDERAL SUPPLY CLASS
4720

RATIONALE

AS4624D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.


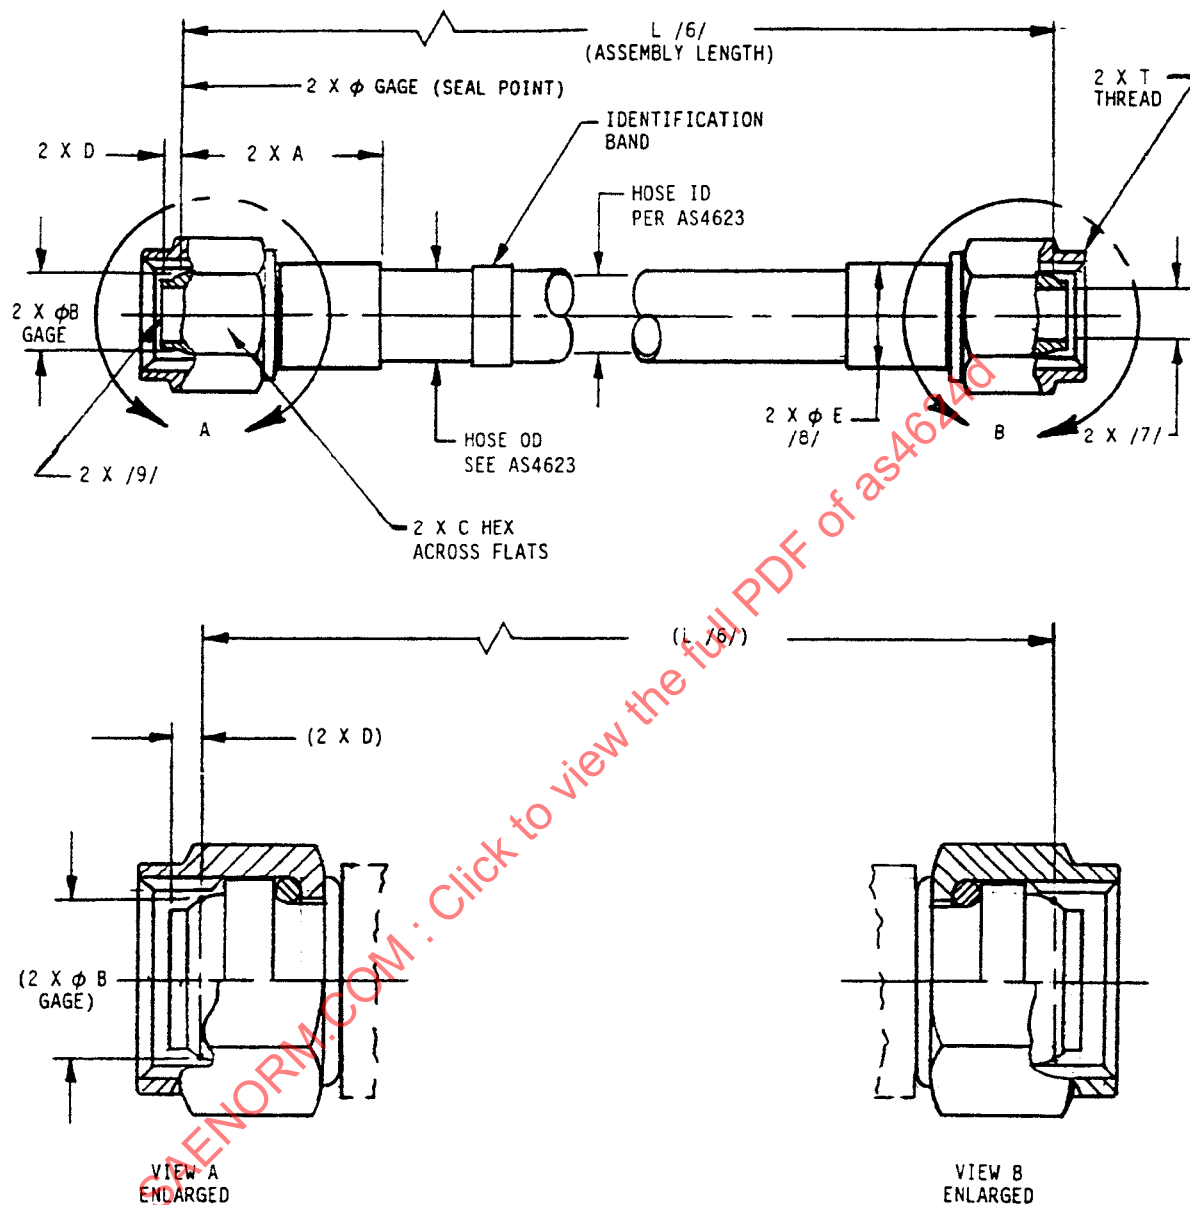


FIGURE 1 - FLARELESS HOSE ASSEMBLY, STRAIGHT TO STRAIGHT

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS4624D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: /2/ AS4623



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID
REINFORCED, HEAVY-DUTY, 275 °F, 3000 PSI FLARELESS
TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624
SHEET 1 OF 6

REV.
D

Copyright 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1992-06 REVISED 2009-07 REAFFIRMED 2015-04

TABLE 1 – HOSE AND FITTING DIMENSIONS

BASIC HOSE ASSEMBLY NO. AS4624 SIZE	SIZE	/14/ FITTING TYPE	THREAD T PER AS8879	A MAX	Ø B GAGE BASIC	C HEX	D	E Ø/8/ MAX	BALL SIZE MIN THRU /7/ IN
E	0.250	--	--	--	--	--	--	--	--
E	0.250	S	0.4375-20UNJF-3B	1.630	0.2930	0.56	0.16	0.69	0.108
E	0.250	E	0.5625-18UNJF-3B	1.695	0.4120	0.69	0.16	0.69	0.108
G	0.375	R	0.4375-20UNJF-3B	1.740	0.2930	0.56	0.16	0.80	0.108
G	0.375	S	0.5625-18UNJF-3B	1.835	0.4120	0.69	0.16	0.80	0.184
G	0.375	E	0.7500-16UNJF-3B	1.930	0.5600	0.88	0.19	0.80	0.184
H	0.500	R	0.5625-18UNJF-3B	2.145	0.4120	0.69	0.16	0.97	0.184
H	0.500	S	0.7500-16UNJF-3B	2.165	0.5600	0.88	0.19	0.97	0.283
H	0.500	E	0.8750-14UNJF-3B	2.675	0.6730	1.00	0.20	0.97	0.283
J	0.625	R	0.7500-16UNJF-3B	2.860	0.5600	0.88	0.19	1.15	0.283
J	0.625	S	0.8750-14UNJF-3B	2.905	0.6730	1.00	0.20	1.15	0.342
J	0.625	E	1.0625-12UNJ-3B	2.920	0.8100	1.25	0.23	1.15	0.342
K	0.750	R	0.8750-14UNJF-3B	3.240	0.6730	1.00	0.20	1.38	0.342
K	0.750	S	1.0625-12UNJ-3B	3.205	0.8100	1.25	0.23	1.38	0.459
K	0.750	E	1.3125-12UNJ-3B	3.320	1.0620	1.50	0.30	1.38	0.459
M	1.000	R	1.0625-12UNJ-3B	3.690	0.8100	1.25	0.23	1.66	0.459
M	1.000	S	1.3125-12UNJ-3B	3.740	1.0620	1.50	0.30	1.66	0.684
M	1.000	E	1.5625-12UNJ-3B	3.570	1.3160	1.81	0.04	1.66	0.684
N	1.250	--	--	--	--	--	--	--	--
N	1.250	S	1.5625-12UNJ-3B	4.330	1.3160	1.81	0.04	2.32	0.832
N	1.250	--	--	--	--	--	--	--	--



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PARA ARAMID
REINFORCED, HEAVY-DUTY, 275 °F, 3000 PSI FLARELESS
TITANIUM FITTINGS, INCLUDING JUMP SIZE, STRAIGHT TO STRAIGHT

AS4624
SHEET 2 OF 6

REV.
D

TABLE 2 – HOSE OR SLEEVE OUTSIDE DIAMETERS /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	HOSE SIZE 0.250	HOSE SIZE 0.375	HOSE SIZE 0.500	HOSE SIZE 0.625	HOSE SIZE 0.750	HOSE SIZE 1.000	HOSE SIZE 1.250
-	(-) INDICATES HOSE ONLY NO SLEEVE (SEE AS4623)	275	--	--	--	--	--	--	--
A	FIRE SLEEVE (AS1072 SIL-FG) (5 MIN) /11/12/13/	275	0.930/0.730	1.070/0.880	1.205/1.015	1.370/1.130	1.590/1.380	1.847/1.677	2.130/1.950
B	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /20/	275	0.596/0.524	0.760/0.680	0.905/0.825	1.030/0.940	1.302/1.198	1.599/1.495	0.884/1.776
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /21/	275	0.555/0.635	0.675/0.755	0.840/0.920	0.935/1.025	1.205/1.305	1.502/1.602	1.775/1.875

TABLE 3 – HOSE ASSEMBLY LENGTH TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 IN	± 0.125 IN
18 TO 36 IN EXCLUSIVE	± 0.250 IN
36 TO 50 IN EXCLUSIVE	± 0.500 IN
50 IN AND OVER	±1%

TABLE 4 – CUFF LENGTHS

HOSE SIZE	LENGTH (INCHES) ± 0.25
0.250	2.25
0.375	2.75
0.500	3.50
0.625	4.25
0.750	5.75
1.000	6.00
1.250	6.75

TABLE 5 – MAXIMUM HOSE AND FITTING WEIGHTS

HOST OR SLEEVE CODE	HOSE, PART OR SLEEVE	UNITS	HOSE SIZE									
			0.250	0.375	0.500	0.625	0.750	1.000	1.250			
-	HOSE ONLY (SEE AS4623)	LB/IN	--	--	--	--	--	--	--	--	--	--
A	FIRESLEEVE AS1072 (5 MIN PER AS1055) /15/	LB/IN	--	--	--	--	--	--	--	--	--	--
B	PROTECTIVE SLEEVE SHRINK-ON (POLYOLEFIN AS1073, CODE B) /20/	LB/IN	0.0006	0.0012	0.0018	0.0018	0.0032	0.0032	0.0049			
NONE	FIRESLEEVE CLAMP	LB/EA	0.020	0.020	0.021	0.021	0.025	0.025	0.032			
NONE	FITTING END (STRAIGHT) /14/ /16/	R LB/EA	--	0.077	0.118	0.186	0.427	0.823	--			
		S LB/EA	0.054	0.081	0.135	0.200	0.476	0.853	TBD /9/			
		E LB/EA	0.074	0.115	0.193	0.267	0.591	1.000	--			
K	ABRASION SLEEVE POLYESTER WITH HOSE /21/	LB/IN	0.013	0.017	0.023	0.026	0.035	0.058	0.078			

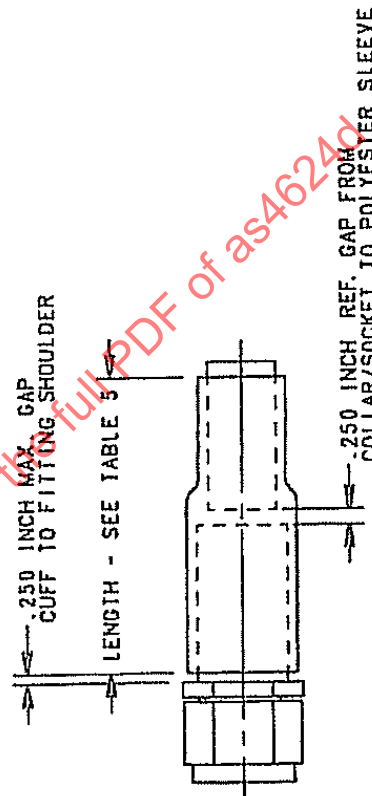


FIGURE 2 – POLYESTER ABRASION SLEEVE CUFF /21/