

AS4684

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

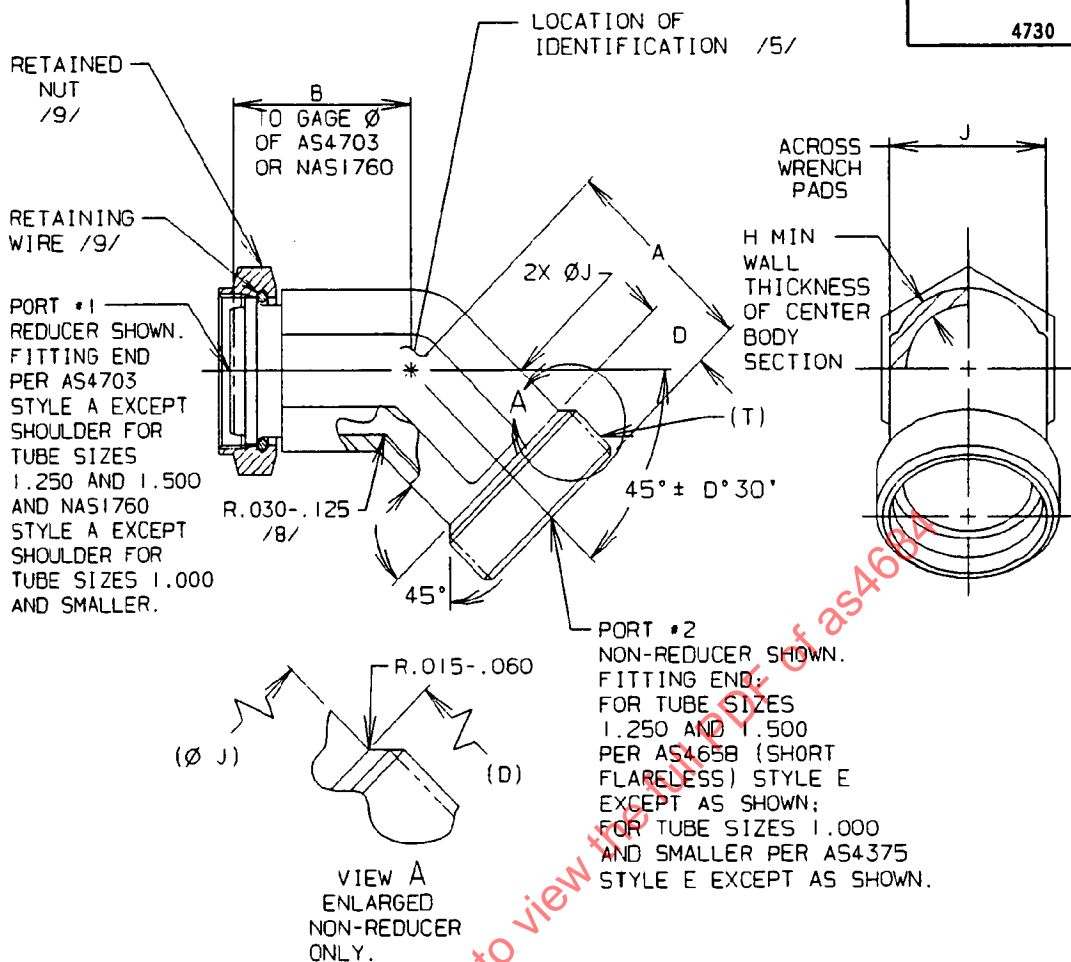


FIGURE 1 - ELBOW ASSEMBLY, 45°


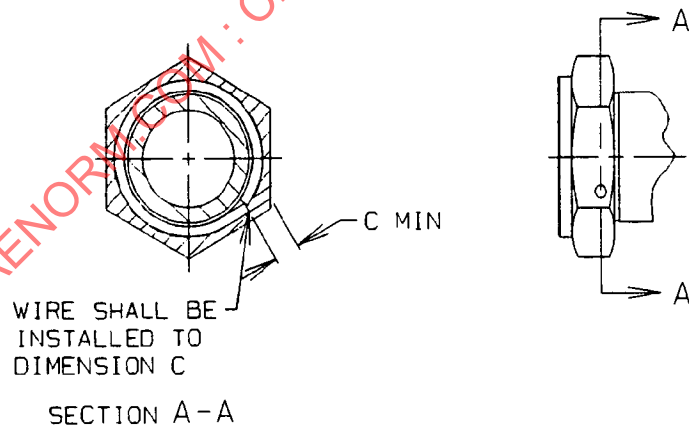


FIGURE 2 - INSTALLATION, RETAINED NUT AND RETAINING WIRE



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

ELBOW ASSEMBLY, 45°
REDUCER, RETAINED NUT,
FLARELESS AND SHORT FLARELESS

AS4684

SHEET 1 OF 4

ISSUED 1992-07-15 REVISED

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO.					LB/EA	LB/EA	LB/EA
AS4684							
/10/ /16/	J				MAX	MAX	MAX
SIZE CODE	C	D	H	+ .005/- .020	ALUM	CRES	TI
20	.155	.517	.124	1.375	.268	.779	.451
24	.180	.614	.156	1.688	.381	1.098	.636

TABLE 2 - LEG LENGTH A

SIZE OF PORT #2	FORGING SIZE /10/ 20	FORGING SIZE /10/ 24
04	.876	.928
05	.876	.928
06	.892	.944
08	.985	1.037
10	1.048	1.100
12	1.111	1.163
16	1.111	1.163
20	1.053	.956
24	--	1.105

TABLE 3 - LEG LENGTH B

SIZE OF PORT #1	FORGING SIZE /10/ 20	FORGING SIZE /10/ 24
04	.853	.950
05	.905	.957
06	.966	1.018
08	1.063	1.115
10	1.142	1.194
12	1.131	1.183
16	1.179	1.231
20	1.055	1.107
24	--	1.135

TABLE 4 - TUBE SIZE AND CORRESPONDING THREADS

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879
4	.250	.4375-20UNJF
5	.312	.5000-20UNJF
6	.375	.5625-18UNJF
8	.500	.7500-16UNJF
10	.625	.8750-12UNJF
12	.750	1.0625-12UNJ
16	1.000	1.3125-12UNJ
20	1.250	1.5625-12UNJ
24	1.500	1.8125-12UNJ

NOTES:

/1/ MATERIAL:

a. CODE LETTER T:

- (1) BODY: TYPE 6AL-4V TITANIUM ALLOY PER AMS 4928
- (2) NUT: CODE LETTER T OF AS4702 OR AS1790 REFERENCE (TYPE 6AL-4V TITANIUM ALLOY)
- (3) WIRE: PER AS4701 OR AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

b. CODE LETTER V:

- (1) BODY: TYPE 15-5PH CORROSION RESISTANT STEEL PER AMS 5659
- (2) NUT: CODE LETTER V OF AS4702 OR AS1790 REFERENCE (TYPE 15-5PH CORROSION RESISTANT STEEL)
- (3) WIRE: PER AS4701 OR AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

c. CODE LETTER W:

- (1) BODY: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS 4141 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124
- (2) NUT: CODE LETTER W OF AS4702 OR AS1790 REFERENCE (TYPE 7075-T73 ALUMINUM ALLOY)
- (3) WIRE: PER AS4701 OR AS1791 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

2. HEAT TREAT:

a. MATERIAL CODE LETTER T:

- (1) BODY, NUT, AND WIRE: NONE

b. MATERIAL CODE LETTER V:

- (1) BODY: HEAT TREAT TO CONDITION H-1075 PER AMS 2759/3
- (2) NUT: MATERIAL CODE LETTER V OF AS4702 OR AS1790 REFERENCE (HEAT TREAT TO CONDITION H-1075)
- (3) WIRE: NONE

c. MATERIAL CODE LETTER W:

- (1) BODY, NUT, AND WIRE: NONE

/3/ FINISH:

a. MATERIAL CODE LETTER T:

- (1) BODY: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486
- (2) NUT: CODE LETTER T OF AS4702 OR AS1790 WITH SUFFIX N REFERENCE (FLUORIDE PHOSPHATE CONVERSION COAT AND COAT WITH DRY LUBRICANT ON ID)
- (3) WIRE: PER AS4701 OR AS1791 REFERENCE (PASSIVATE AND COAT WITH DRY LUBRICANT)