

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

SAE AS51992

FEDERAL SUPPLY CLASS
5307

RATIONALE

AS51992A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.


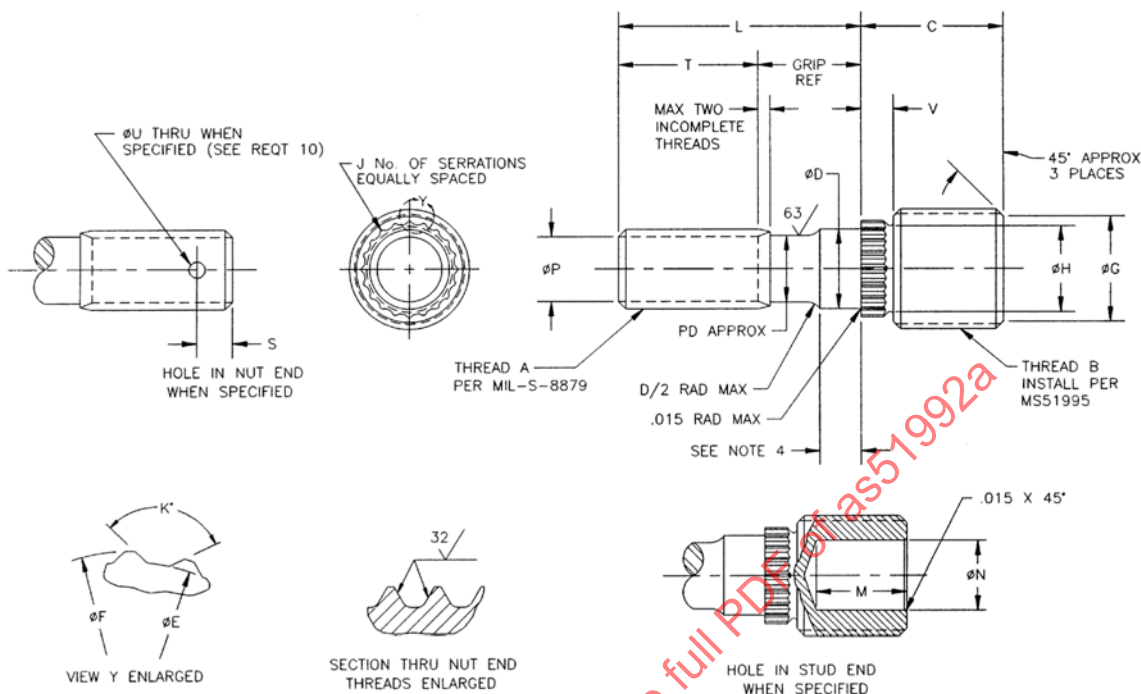


TABLE 1 - SHORT STUD END LENGTH

DASH NO.	A NUT END THREAD UNJF-3A	B STUD END THREAD			C	ØD	ØE	ØF	ØG	ØH	J	K	M	ØN	T	V	ØP	S	ØU	LOCKRING MS51997 BASIC DASH NO.
		SEE REQT 4	PITCH DIA	MINOR DIA	±.020		+ .005 - .004	+ .007 - .002	+ .000 - .015	MIN		+2° -1°	REF		±.015	±.015	±.010	±.015	+ .005 - .002	
-502	.1900-32	.3125-24	.2884 .2869	.2643 .2559	.386	.189 .186	.203	.230	.255	.175	13	102°	.205	.174	.469	.128	.137	.120	.067	102P
-503	.2500-28	.3750-24	.3512 .3497	.3271 .3185	.486	.249 .246	.255	.284	.318	.233	17	86°	.281	.202	.594	.142	.190	.160	.067	103P
-504	.3125-24	.4375-20	.4084 .4067	.3795 .3700	.627	.312 .309	.316	.345	.370	.294	20	102°	.380	.205	.688	.176	.242	.160	.067	104P
-505	.3750-24	.5000-20	.4711 .4694	.4422 .4325	.762	.374 .371	.380	.407	.432	.357	24	102°	.480	.222	.750	.200	.305	.170	.096	105P
-506	.4375-20	.6250-16	.5927 .5910	.5606 .5498	.808	.437 .433	.456	.487	.549	.433	28	102°	.517	.324	.812	.200	.354	.170	.096	106P
-507	.5000-20	.7500-16	.7134 .7114	.6773 .6656	.883	.499 .495	.567	.601	.665	.535	28	111°	.563	.438	.875	.200	.416	.190	.096	107P
-508	.6250-18	.8750-14	.8328 .8308	.7916 .7786	1.153	.624 .620	.687	.721	.778	.645	30	111°	.773	.470	1.000	.255	.532	.220	.128	108P

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS51992A>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: MIL-S-45909

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

STUD, LOCKED IN-RING,
SERRATED, HIGH STRENGTH

SAE AS51992
SHEET 1 OF 4

REV.
A

TABLE II – MEDIUM STUD END LENGTH

DASH NO.	A NUT END THREAD UNJF-3A	B STUD END THREAD			C	ØD	ØE	ØF	ØG	ØH	J	K	M	ØN	T	V	ØP	S	ØU	LOCKRING MS51997 BASIC DASH NO.
		SEE REQT 4	PITCH DIA	MINOR DIA	±.020		+ .005 - .004	+ .007 - .002	+ .000 - .015	MIN		+2° -1°	REF		±.015	±.015	±.010	±.015	+ .005 - .002	
-642	.1900-32	.3125-24	.2884 2869	.2843 2559	.433	.189 .186	.203	.230	.255	.175	13	102°	.252	.174	.469	.128	.137	.120	.067	102P
-643	.2500-28	.3750-24	.3512 3497	.3271 3185	.558	.249 .246	.255	.284	.318	.233	17	86°	.353	.202	.594	.142	.190	.160	.067	103P
-644	.3125-24	.4375-20	.4084 4067	.3795 3700	.725	.312 .309	.316	.345	.370	.294	20	102°	.478	.205	.688	.176	.242	.160	.067	104P
-645	.3750-24	.5000-20	.4711 4694	.4422 4325	.893	.374 .371	.380	.407	.432	.357	24	102°	.611	.222	.750	.200	.305	.170	.096	105P
-646	.4375-20	.6250-18	.5927 5910	.5606 5498	.948	.437 .433	.456	.487	.549	.433	26	102°	.657	.324	.812	.200	.354	.170	.096	106P
-647	.5000-20	.7500-16	.7134 7114	.6873 6856	1.038	.499 .495	.567	.601	.665	.535	28	111°	.718	.438	.875	.200	.416	.190	.096	107P
-648	.6250-18	.8750-14	.8328 8308	.7916 7786	1.364	.624 .620	.687	.721	.778	.645	30	111°	.984	.470	1.000	.255	.532	.220	.128	108P

TABLE III – LONG STUD END LENGTH

DASH NO.	A NUT END THREAD UNJF-3A	B STUD END THREAD			C	ØD	ØE	ØF	ØG	ØH	J	K°	M	ØN	T	V	ØP	S	ØU	LOCKRING MS51997 BASIC DASH NO.
		SEE REQT 4	PITCH DIA	MINOR DIA	±.020		+ .005 - .004	+ .007 - .002	+ .000 - .015	MIN		+2° -1°	REF		±.015	±.015	±.010	±.015	+ .005 - .002	
-802	.1900-32	.3125-18	.2795 2778	.2474 2373	.511	.189 .186	.203	.230	.237	.175	13	102°	.330	.148	.469	.128	.137	.120	.067	102P
-803	.2500-28	.3750-16	.3378 3358	.3017 2906	.673	.249 .246	.255	.284	.290	.233	17	86°	.468	.157	.594	.142	.190	.160	.067	103P
-804	.3125-24	.4375-14	.3946 3926	.3534 3411	.868	.312 .309	.316	.345	.341	.294	20	102°	.621	.153	.688	.176	.242	.160	.067	104P
-805	.3750-24	.5000-13	.4537 4512	.4083 3963	1.076	.374 .371	.380	.407	.396	.357	24	102°	.794	.148	.750	.200	.305	.170	.096	105P
-806	.4375-20	.6250-11	.5699 5674	.5174 5028	1.155	.437 .433	.456	.487	.502	.433	26	102°	.864	.239	.812	.200	.354	.170	.096	106P
-807	.5000-20	.7500-10	.6891 6866	.6314 6156	1.267	.499 .495	.567	.601	.615	.535	28	111°	.947	.369	.875	.200	.416	.190	.096	107P
-808	.6250-18	.8750-9	.8071 8046	.7430 7257	1.656	.624 .620	.687	.721	.725	.645	30	111°	1.276	.378	1.000	.255	.532	.220	.128	108P

REQUIREMENTS

1. MATERIAL :

CODE LETTER

A – STEEL, ALLOY, GRADE 8740 (UNS G87400) CONFORMING TO AMS 6322.
 B – STEEL, ALLOY, GRADE 8740 (UNS G87400) CONFORMING TO AMS 6322.
 C – STEEL, CORROSION AND HEAT RESISTANT, TYPE A286 CONFORMING TO AMS 5731, AMS 5732, AMS 5734 OR AMS 5737.
 D – NICKEL BASE ALLOY, CORROSION AND HEAT RESISTANT, TYPE 718 (UNS N07718) CONFORMING TO AMS 5662.
 E – TITANIUM ALLOY, Ti-6Al-4V (UNS R56400) CONFORMING TO MIL-T-9047, Ti-6Al-4V, CONDITION A OR AMS 4967.

2. PROTECTIVE COATING OR TREATMENT:

MATERIAL CODE LETTER

A – CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3.
 B – CADMIUM PLATED IN ACCORDANCE WITH AMS 2401.
 C & D – CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380.
 E – NONE.

3. SURFACE ROUGHNESS:

UNLESS OTHERWISE SPECIFIED, MACHINED SURFACES SHALL BE 125 MICROINCHES IN ACCORDANCE WITH ANSI B46.1 EXCEPT FOR SERRATED COLLAR.

4. THREADS:

THE STUD END THREAD HAS A SPECIAL PITCH DIAMETER AND MINOR DIAMETER WHICH INSTALLS INTO A MIL-S-8879, CLASS 3B TAPPED HOLE. THREADS SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

5. **MECHANICAL PROPERTIES:** MATERIAL CODE LETTERS AND CORRESPONDING HARDNESS, TENSILE STRENGTHS AND PERTINENT LENGTH DASH NUMBERS FOLLOW:

MATERIAL CODE LETTERS	HARDNESS MIN	MIN TENSILE STRENGTH KSI	DASH NUMBERS
A	35HRC	160	-642 THRU -648 & -802 THRU -808
B	39HRC	180	-502 THRU -508
C	277HB	140	-502 THRU -508, -642 THRU -648 & -802 THRU -808
D	39HRC	180	-502 THRU -508
E	35HRC	160	-502 THRU -508, -642 THRU -648 & -802 THRU -808

6. **CONCENTRICITY:**

SHANK OF NUT END SHALL BE CONCENTRIC WITH SERRATED COLLAR WITHIN .006 FIM.

7. **FILLETS:**

FILLETS SHALL BE .030 RADIUS MAXIMUM.

8. **EDGES:**

EDGES BROKEN .003-.015 UNLESS OTHERWISE SPECIFIED.

9. **TOLERANCES:**

LINEAR DIMENSIONS $\pm .005$, ANGULAR DIMENSIONS $\pm 2^\circ$

10. **PART NUMBER:**

THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE MATERIAL CODE LETTER, PLUS THE DASH NUMBER, PLUS THE SECOND DASH NUMBER FOR LENGTH (TABLE IV). ADD "D" IN LIEU OF THE "DASH" FOR DRILLED HOLE IN NUT END. ADD "R" AS SUFFIX FOR RECESS IN STUD END. EXAMPLE:

MS51992 A 803-24 STUD, ALLOY STEEL, 1.5 INCH NUT END LENGTH.

MS51992 B 503-24 STUD, ALLOY STEEL, 1.5 INCH NUT END LENGTH.

MS51992 C 643-24 STUD, CRES, 1.5 INCH NUT END LENGTH.

MS51992 D 503-24 STUD, NICKEL BASE ALLOY, 1.5 INCH NUT END LENGTH.

MS51992 E 803-24 STUD, TITANIUM ALLOY, 1.5 INCH NUT END LENGTH.

* MS51992 A 803D24 STUD, ALLOY STEEL, DRILLED HOLE, 1.5 INCH NUT END LENGTH.

* MS51992 A 803D24R STUD, ALLOY STEEL, DRILLED HOLE, RECESS IN STUD END, 1.5 INCH NUT END LENGTH.

* THE SAME CONDITION(S) CAN EXIST FOR ALL OF THE ABOVE MATERIALS.

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1. DIMENSIONS: DIMENSIONS IN INCHES; TO BE MET AFTER PLATING.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.