

AS5368

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


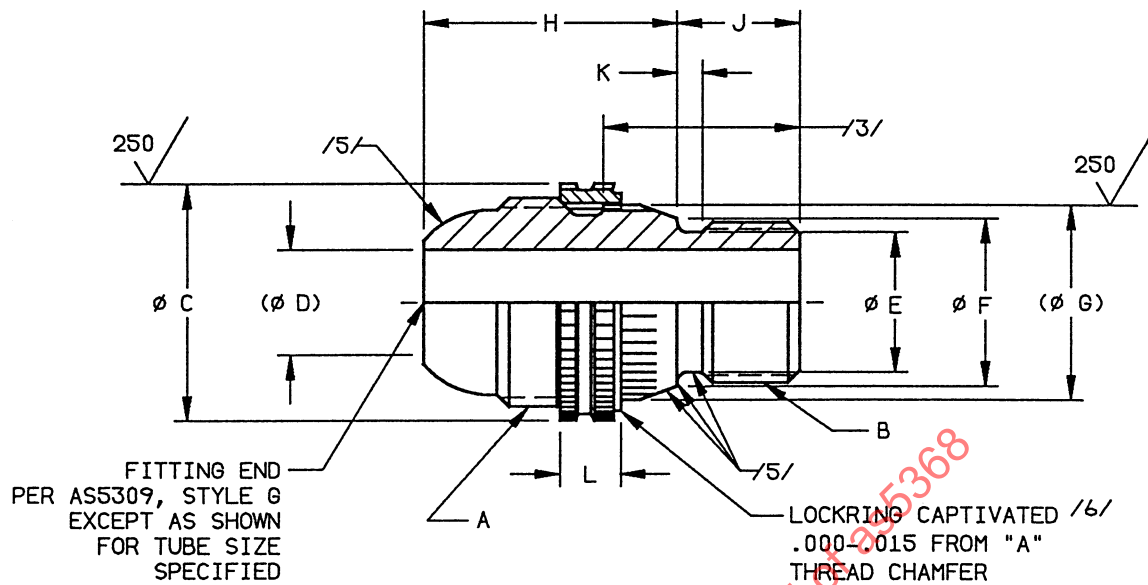


FIGURE 1 - ADAPTER, ASSEMBLY

THIRD ANGLE PROJECTION



ISSUED 1998-07

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4841

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

ADAPTER, ASSEMBLY - PORT CONNECTION
RING LOCKED TO SPHERICAL FLARED TUBE END,
3000 psi

AS5368
SHEET 1 OF 3

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS5368 /15/ SIZE CODE	NOMINAL TUBE SIZE	A THREAD AS8879	B THREAD AS8879	C	D	E +0.005/-0.002	F MIN	G	H +0.010/-0.005	J +0.000/-0.015	K +0.010/-0.005	L ±0.007	WEIGHT LB/EA MAX	(M) STAND-OFF AFTER INSTL /9/ ±0.02
04	0.250	.4375-20UNJF-3A	.3125-24UNJF-3A	0.514	0.168-0.175	0.239	0.331	0.400	0.856	0.355	0.125	0.192	0.0262	0.69
05	0.312	.5000-20UNJF-3A	.3750-24UNJF-3A	0.624	0.230-0.237	0.301	0.393	0.491	0.856	0.381	0.125	0.192	0.0363	0.69
06	0.375	.5625-18UNJF-3A	.4375-20UNJF-3A	0.700	0.293-0.301	0.364	0.456	0.544	0.931	0.395	0.125	0.210	0.0426	0.75
08	0.500	.7500-16UNJF-3A	.5625-18UNJF-3A	0.814	0.387-0.395	0.482	0.574	0.670	1.091	0.430	0.125	0.210	0.0810	0.91
10	0.625	.8750-14UNJF-3A	.6875-24UNJEF-3A	1.040	0.480-0.488	0.625	0.717	0.824	1.191	0.465	0.125	0.210	0.1321	1.01
12	0.750	1.0625-12UNJ-3A	.8125-20UNJEF-3A	1.170	0.604-0.614	0.737	0.891	0.981	1.301	0.527	0.157	0.220	0.1991	1.12
16	1.000	1.3125-12UNJ-3A	1.1250-18UNJEF-3A	1.456	0.839-0.851	1.000	1.154	1.251	1.341	0.564	0.157	0.220	0.2953	1.16

AEROSPACE STANDARD

ADAPTER, ASSEMBLY - PORT CONNECTION
RING, LOCKED TO SPHERICAL FLARED TUBE END,
3000 psi