

# RATIONALE

THIS STANDARD IS BASED ON THE AS1006 FITTING. IT INTRODUCES THE IMPROVED TOLERANCE END FITTING DESIGN AS5863 AND OTHER IMPROVEMENTS.


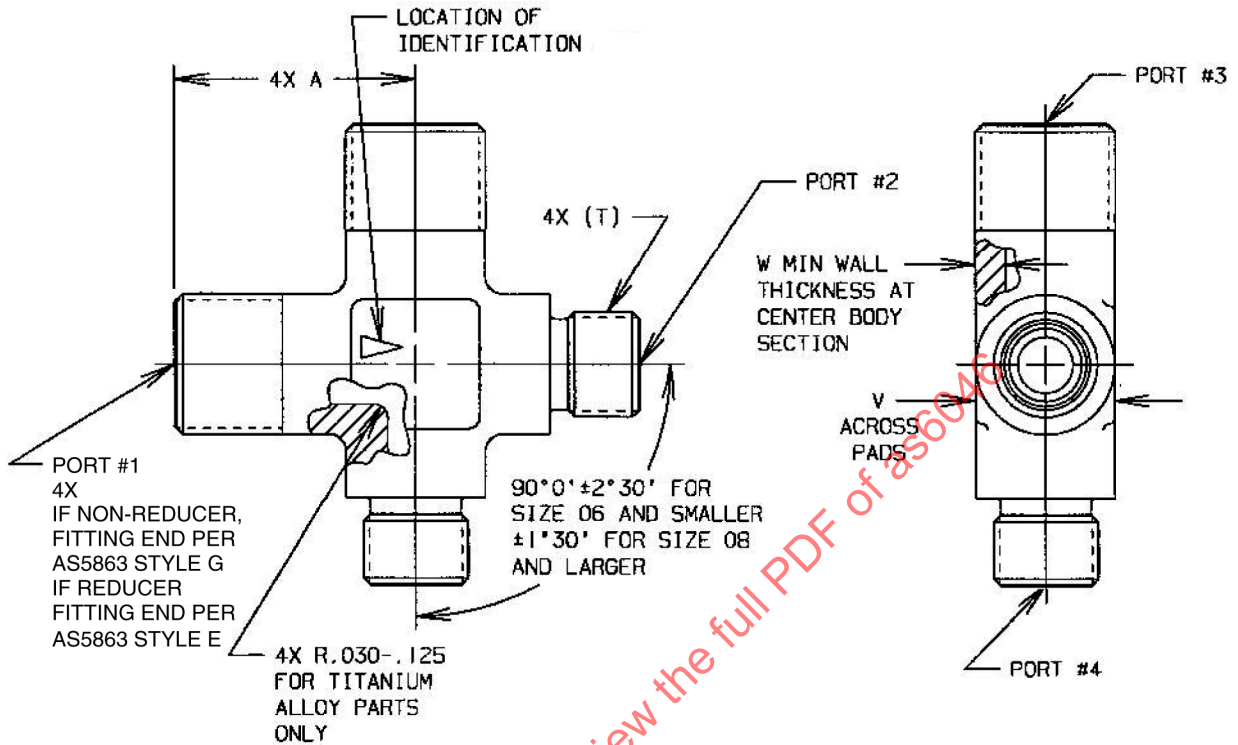


FIGURE 1 - FITTING, CROSS, PORT #2 AND PORT #4 SHOWN AS REDUCER

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS6046>

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /5/ AS18280

**SAE Aerospace**  
An SAE International Group

## AEROSPACE STANDARD

FITTING, CROSS,  
STANDARD AND REDUCER,  
FLARELESS, PRECISION TYPE

**SAE AS6046**  
SHEET 1 OF 4

TABLE 1 - DIMENSIONS AND WEIGHTS /9/ /10/

| BASIC NO.<br>AS6046<br>/19/<br>SIZE CODE | V           | W    | LB/EA<br>APPROX<br>REF<br>ALUM | LB/EA<br>APPROX<br>REF<br>STEEL | LB/EA<br>APPROX<br>REF<br>TI |
|------------------------------------------|-------------|------|--------------------------------|---------------------------------|------------------------------|
| 02                                       | .297- .314  | .090 | .0180                          | .0516                           | .0285                        |
| 03                                       | .360- .377  | .100 | .0273                          | .0783                           | .0432                        |
| 04                                       | .423- .440  | .110 | .0356                          | .102                            | .0565                        |
| 05                                       | .485- .502  | .120 | .0477                          | .137                            | .0755                        |
| 06                                       | .547- .565  | .120 | .0604                          | .173                            | .0956                        |
| 08                                       | .735- .753  | .150 | .122                           | .349                            | .193                         |
| 10                                       | .860- .878  | .170 | .156                           | .447                            | .246                         |
| 12                                       | 1.047-1.065 | .185 | .265                           | .762                            | .420                         |
| 14                                       | 1.173-1.191 | .200 | .330                           | .950                            | .522                         |
| 16                                       | 1.292-1.317 | .205 | .391                           | 1.12                            | .619                         |
| 20                                       | 1.605-1.630 | .240 | .631                           | 1.81                            | 1.00                         |
| 24                                       | 1.855-1.880 | .250 | .770                           | 2.21                            | 1.22                         |
| 32                                       | 2.542-2.572 | .350 | 1.70                           | 4.87                            | 2.69                         |

TABLE 2 - LEG LENGTH A /9/ /11/

| FORGING<br>SIZE | 02    | 03    | 04    | 05    | 06    | 08    | 10    | 12    | 14    | 16    | 20    | 24    | 32    |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 02              | .773  | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     |
| 03              | .789  | .836  | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     |
| 04              | .820  | .867  | .898  | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     |
| 05              | .883  | .930  | .961  | .961  | -     | -     | -     | -     | -     | -     | -     | -     | -     |
| 06              | .961  | 1.008 | 1.039 | 1.039 | 1.055 | -     | -     | -     | -     | -     | -     | -     | -     |
| 08              | 1.086 | 1.133 | 1.164 | 1.164 | 1.180 | 1.273 | -     | -     | -     | -     | -     | -     | -     |
| 10              | 1.180 | 1.226 | 1.258 | 1.258 | 1.274 | 1.367 | 1.430 | -     | -     | -     | -     | -     | -     |
| 12              | 1.272 | 1.320 | 1.351 | 1.351 | 1.367 | 1.460 | 1.523 | 1.586 | -     | -     | -     | -     | -     |
| 14              | 1.398 | 1.445 | 1.476 | 1.476 | 1.492 | 1.585 | 1.648 | 1.742 | 1.680 | -     | -     | -     | -     |
| 16              | 1.429 | 1.476 | 1.507 | 1.507 | 1.523 | 1.616 | 1.679 | 1.742 | 1.742 | 1.742 | -     | -     | -     |
| 20              | 1.585 | 1.632 | 1.663 | 1.663 | 1.679 | 1.772 | 1.835 | 1.898 | 1.898 | 1.898 | 1.898 | -     | -     |
| 24              | 1.710 | 1.757 | 1.788 | 1.788 | 1.804 | 1.897 | 1.960 | 2.023 | 2.023 | 2.023 | 2.023 | 2.023 | -     |
| 32              | 2.148 | 2.195 | 2.226 | 2.226 | 2.242 | 2.335 | 2.398 | 2.461 | 2.461 | 2.461 | 2.461 | 2.461 | 2.461 |

TABLE 3 - TUBE SIZE AND CORRESPONDING THREAD

| PORT<br>SIZE | (NOMINAL<br>TUBE<br>SIZE) | T THREAD<br>ISO 3161 |
|--------------|---------------------------|----------------------|
| 02           | .125                      | .3125-24 UNJF        |
| 03           | .188                      | .3750-24 UNJF        |
| 04           | .250                      | .4375-20 UNJF        |
| 05           | .312                      | .5000-20 UNJF        |
| 06           | .375                      | .5625-18 UNJF        |
| 08           | .500                      | .7500-16 UNJF        |
| 10           | .625                      | .8750-14 UNJF        |
| 12           | .750                      | 1.0625-12 UNJ        |
| 14           | .875                      | 1.8750-12 UNJ        |
| 16           | 1.000                     | 1.3125-12 UNJ        |
| 20           | 1.250                     | 1.6250-12 UNJ        |
| 24           | 1.500                     | 1.8750-12 UNJ        |
| 32           | 2.000                     | 2.5000-12 UNJ        |

## NOTES:

## NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

## /1/ MATERIAL:

- a. CODE LETTER T – TYPE 6AL-4V TITANIUM ALLOY PER PROCUREMENT SPECIFICATION
- b. CODE LETTER V – TYPE 15-5PH, CORROSION RESISTANT STEEL PER PROCUREMENT SPECIFICATION
- c. CODE LETTER W – TYPE 7075-T73 ALUMINUM ALLOY BAR OR FORGING, OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER PROCUREMENT SPECIFICATION

## 2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER T – ANNEALED PER PROCUREMENT SPECIFICATION
- b. MATERIAL CODE LETTER V – AGE TO CONDITION H1075 PER PROCUREMENT SPECIFICATION
- c. MATERIAL CODE LETTER W – T73 OR T7351 PER PROCUREMENT SPECIFICATION

## /3/ FINISH:

- a. MATERIAL CODE LETTER T – ANODIZE OR FLUORIDE PHOSPHATE CONVERSION COAT PER PROCUREMENT SPECIFICATION
- b. MATERIAL CODE LETTER V:
  1. V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: PASSIVATE PER PROCUREMENT SPECIFICATION
  2. V CODE PARTS TO BE CADMIUM PLATED ONLY SHALL HAVE THE FINISH CODE LETTER "P" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: CADMIUM PLATE PER PROCUREMENT SPECIFICATION
- c. MATERIAL CODE LETTER W – ANODIZE PER PROCUREMENT SPECIFICATION

## /4/ OXYGEN SYSTEM AND COMPONENT CLEANING, SUFFIX LETTER A /19/:

- a. MATERIAL CODE LETTER P – CLEAN AND PACKAGE PER ARP1176 CATEGORY 1C
- b. MATERIAL CODE LETTER W – CLEAN AND PACKAGE PER ARP1176 CATEGORY 2

/5/ PROCUREMENT SPECIFICATION: AS18280 UNLESS OTHERWISE SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST PRI-QPL-AS18280 FOR THIS STANDARD. SEE <http://www.eauditnet.com> FOR CURRENT QPL ONLINE.