

REV.
A

AS632

Submitted for recognition as an American National Standard

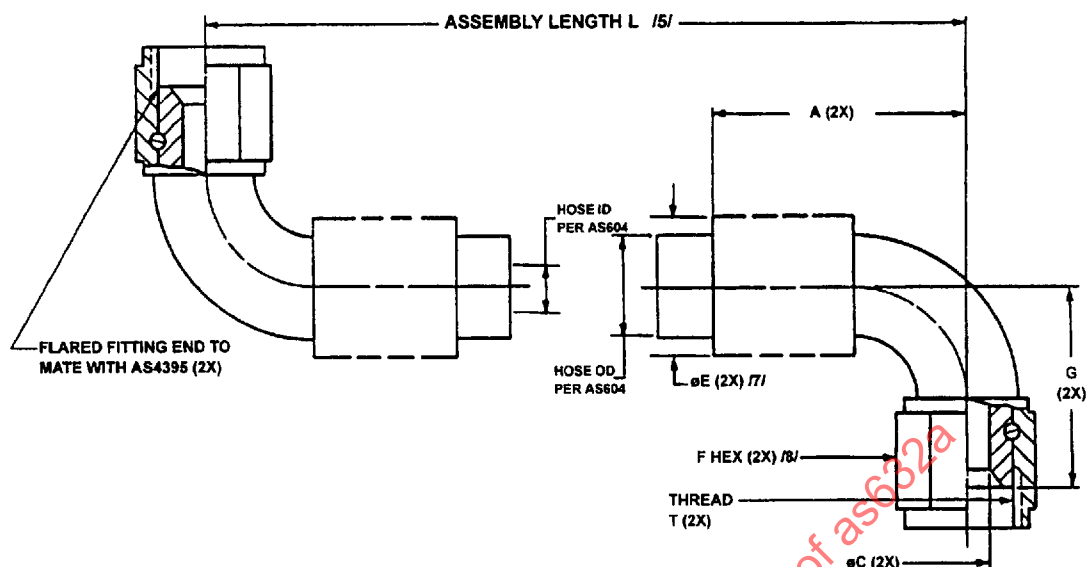
FEDERAL SUPPLY CLASS
4720

FIGURE 1 - HOSE AND FITTING DIMENSIONS

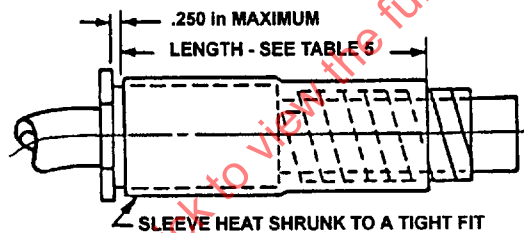


FIGURE 2 - TUBULAR/COIL ABRASION END /9/ /10/

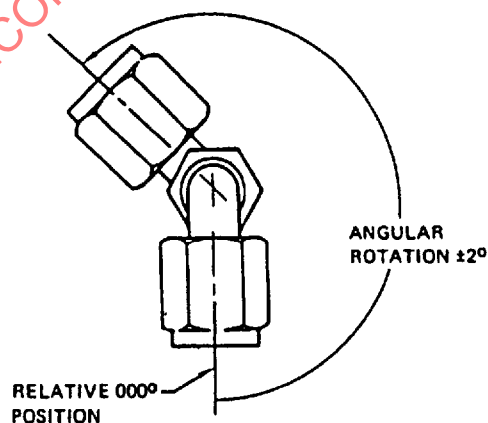


FIGURE 3 - FITTING ANGULAR ORIENTATION /18/

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS604 /2/

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD(R) HOSE ASSEMBLY, 3000 psi, PTFE, FLARED,
90° TO 90°, HEAVYWEIGHT**AS632**
SHEET 1 OF 6**REV.**
A

Copyright 1999 Society of Automotive Engineers, Inc.

All rights reserved.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:(724) 772-8510
(724) 776-4970

FAX: (724) 776-0243

F/ Distributed under license from the IHS Archive

SAE WEB ADDRESS: <http://www.sae.org>

Printed in the U.S.A.

ISSUED 1984-07 REVISED 1999-01

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS632

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	THREAD T PER MIL-S-8879 (REF)	A MAX	C /6/ MIN	E MAX WITHOUT SLEEVING	F HEX (REF)
AS632E	.250	.4375-20 UNJF-3B	1.58	.135	.88	.56
AS632G	.375	.5625-18 UNJF-3B	1.80	.240	1.00	.69
AS632H	.500	.7500-16 UNJF-3B	2.40	.340	1.20	.88
AS632J	.625	.8750-14 UNJF-3B	3.04	.410	1.41	1.00
AS632K	.750	1.0625-12 UNJ-3B	3.35	.510	1.69	1.25
AS632M	1.00	1.3125-12 UNJ-3B	4.26	.760	2.00	1.50
AS632N	1.25	1.6250-12 UNJ-3B	4.50	.925	2.13	2.00

TABLE 1 (CONTINUED)

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	G MIN	G MAX	INSPECTION BALL SIZE DIA IN
AS632E	.250	.615	.740	.115
AS632G	.375	.830	.920	.204
AS632H	.500	.910	1.140	.289
AS632J	.625	1.110	1.310	.349
AS632K	.750	1.340	1.500	.434
AS632M	1.00	1.805	1.865	.646
AS632N	1.25	2.34	2.40	.786

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD(R) HOSE ASSEMBLY, 3000 psi, PTFE, FLARED,
90° TO 90°, HEAVYWEIGHT**AS632**
SHEET 2 OF 6**REV.**
A

REV.
A

AS632

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETER /13/

SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F	HOSE SIZE .250	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.00	HOSE SIZE 1.25
NONE	(-) INDICATES HOSE ONLY, NO SLEEVE	400	.455 .395	.595 .535	.735 .675	.935 .875	1.090 1.030	1.410 1.350	1.650 1.590
A	ABRASION SLEEVE TUBULAR (TFE-AS1291-CODE B) /9/	400	.540 .468	.715 .635	.855 .770	1.025 .960	1.195 1.125	1.515 1.445	1.825 1.755
B	ABRASION SLEEVE COIL (NYLON AS1294) /10/	275	.509 .413	.684 .584	.809 .733	1.005 .923	1.170 1.088	1.492 1.408	1.750 1.690
C	FIRE SLEEVE (AS1072 SIL-FG) (15 min) /11/ /12/ /17/	400	.688 .562	.875 .750	1.000 .875	1.250 1.125	1.375 1.250	1.750 1.625	2.000 1.875
E	ABRASION SLEEVE SHRINK-ON (FEP) /15/	350	.458 .417	.638 .592	.773 .727	.973 .927	1.148 1.102	1.438 1.392	1.688 1.632
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /15/	275	.490 .443	.670 .618	.795 .745	.997 .937	1.174 1.112	1.482 1.428	1.740 1.680
G	FIRE SLEEVE (AS1072 SIL-FG) (5 min) /11/ /12/ /16/	400	.688 .562	.875 .750	1.000 .875	1.250 1.125	1.375 1.250	1.750 1.625	2.000 1.875
H	FIRE SLEEVE INTEGRAL SILICONE (15 min) /17/	400	.700 .640	.880 .820	1.000 .940	1.203 1.143	1.343 1.283	1.656 1.596	1.906 1.846
J	FIRE SLEEVE INTEGRAL SILICONE (5 min) /16/	400	.705 .645	.880 .820	1.005 .945	1.217 1.143	1.382 1.280	1.748 1.593	1.906 1.846
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /14/	300	.505 .480	.675 .645	.795 .765	.985 .955	1.150 1.120	1.470 1.440	1.720 1.680
L	ABRASION SLEEVE COIL (PTFE-AS1293) /10/	400	.522 .449	.692 .622	.817 .747	1.007 .937	1.172 1.102	1.492 1.422	1.750 1.690

TABLE 3 - ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in, EXCLUSIVE	±.250 in
36 TO 50 in, EXCLUSIVE	±.500 in
50 in AND OVER	±1%

REV.
A

AS632

TABLE 4 - WEIGHTS (NOMINAL)

HOSE OR SLEEVE CODE	HOSE OR TYPE SLEEVE	UNITS	HOSE SIZE .250	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.00	HOSE SIZE 1.25
NONE	HOSE ONLY	LB/IN	.012	.028	.040	.062	.086	.140	.154
A	ABRASION SLEEVE (TFE-AS1291-B)	LB/IN	.003	.004	.004	.005	.007	.009	.011
B	ABRASION SLEEVE (NYLON AS1294)	LB/IN	.001	.002	.003	.003	.004	.005	.007
C	FIRE SLEEVE (15 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025
E	ABRASION SLEEVE (FEP)	LB/IN	.002	.003	.003	.005	.006	.007	.009
F	ABRASION SLEEVE (AS1073B)	LB/IN	.002	.003	.003	.004	.005	.006	.008
G	FIRE SLEEVE (5 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025
H	FIRE SLEEVE INTEGRAL (15 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190
J	FIRE SLEEVE INTEGRAL (5 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190
K	ABRASION SLEEVE POLYESTER WITH HOSE	LB/IN	.013	.028	.039	.060	.082	.130	.160
L	ABRASION SLEEVE (PTFE-AS1293)	LB/IN	.003	.004	.005	.005	.006	.007	.009
NONE	FIRE SLEEVE CLAMP (*)	LB/EA	.020	.020	.025	.026	.026	.033	.038
NONE	FITTING END (90°) (*)	LB/EA	.075	.140	.230	.315	.584	.840	1.630

(*) NOTE: FIRE SLEEVE CLAMP AND FITTING END ARE IN POUNDS EACH.

TABLE 5 - SLEEVE LENGTH

HOSE SIZE	LENGTH (INCHES)
.250	2.00 ± .25
.375	
.500	2.50 ± .25
.625	
.750	3.00 ± .25
1.00	
1.25	3.50 ± .25