

FEDERAL SUPPLY CLASS
4720

AS650

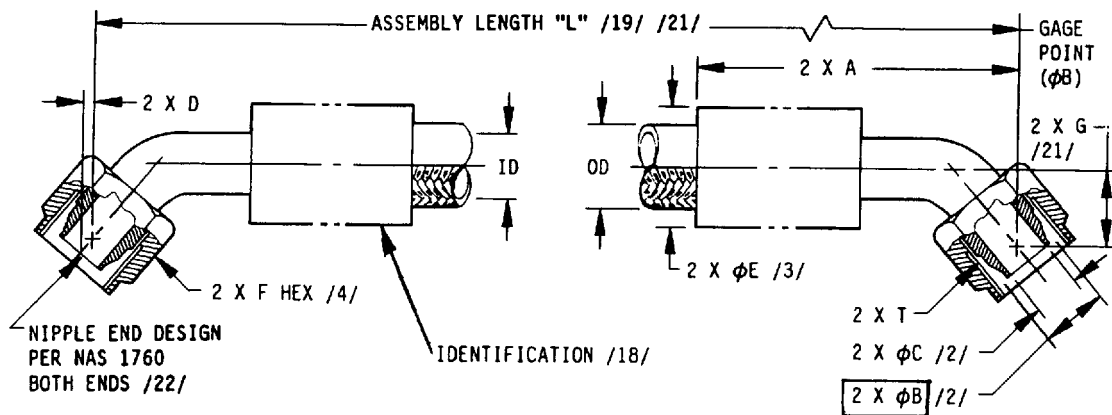


FIGURE 1 - HOSE ASSEMBLY

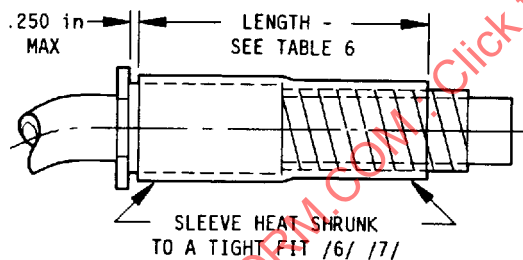


FIGURE 2 - ABRASION SLEEVE ATTACHMENT



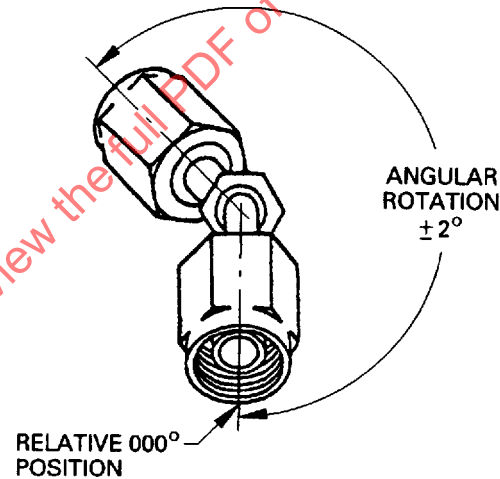
FIGURE 3 - FITTING ANGULAR
POSITION /15/

FIGURE 4 - SEE TABLE 7

THIRD ANGLE PROJECTION

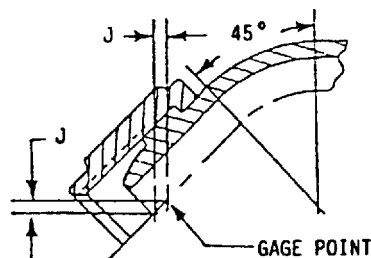

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: /14/ AS1946

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARDHOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
45° TO 45°**AS650**

SHEET 1 OF 6

AS650

TABLE 1 - DIMENSIONS

BASIC NUMBER AS650 SIZE CODE /26/	(NOMINAL TUBE DIA)	(T) THREAD PER MIL-S-8879	ID MIN	A MAX	B BASIC	C MIN /2/	E MAX WITHOUT SLEEVING /3/	(F) HEX ACROSS FLATS	G MIN	G MAX	BALL SIZE MIN THRU DIA /2/ MS19059 DASH NO.	BALL SIZE MIN THRU DIA /2/
D	.188	.3750-24UNJF-3B	.110	1.66	.2340	.049	.10	.49	.352	.477	4804	.049
E	.250	.4375-20UNJF-3B	.173	1.73	.2930	.094	.11	.55	.360	.485	4806	.094
F	.313	.5000-20UNJF-3B	.235	1.91	.3500	.156	.11	.63	.387	.512	4810	.156
G	.375	.5625-18UNJF-3B	.298	2.12	.4120	.219	.12	.70	.464	.589	4813	.219
H	.500	.7500-16UNJF-3B	.391	2.38	.5600	.281	.13	.83	.497	.744	4815	.281
J	.625	.8750-14UNJF-3B	.485	2.85	.6730	.375	.14	.97	1.000	.822	4818	.375
K	.750	1.0625-12UNJ-3B	.615	3.12	.8100	.500	.16	1.17	1.250	.903	4822	.500
M	1.000	1.3125-12UNJ-3B	.851	3.50	1.0620	.750	.21	1.52	1.500	.976	4830	.750
N	1.250	1.6250-12UNJ-3B	1.101	4.07	1.3160	.969	.21	2.00	.799	1.132	4837	.969
P	1.500	1.8750-12UNJ-3B	1.344	4.60	1.5650	1.188	.26	2.28	2.125	1.307	4841	1.188

TABLE 2 - TOLERANCES

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in	±.250 in
36 TO 50 in	±.500 in
OVER 50 in	±1%

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
45° TO 45°

AS650

SHEET 2 OF 6

AS650

TABLE 3 - HOSE AND SLEEVE CODES /1/

HOSE OR SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F
-	(-) INDICATES HOSE ONLY, NO SLEEVE (AS639)	450
A	ABRASION SLEEVE TUBULAR (PTFE - AS1291 - CODE B) /6/	450
B	ABRASION SLEEVE COIL (NYLON AS1294) /7/	275
C	FIRE SLEEVE (AS1072 SIL-FG) (15 min) /8/ /9/ /13/	450
E	ABRASION SLEEVE SHRINK-ON (FEP) /11/	350
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /11/	275
G	FIRE SLEEVE (AS1072 SIL-FG) (5 min) /8/ /9/ /12/	450
H	FIRE SLEEVE INTEGRAL SILICONE (AS1723) (15 min) /13/	450
J	FIRE SLEEVE INTEGRAL SILICONE (5 min) /12/	450
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /10/	300
L	ABRASION SLEEVE COIL (PTFE - AS1293) /7/	450

TABLE 4 - HOSE AND SLEEVE OUTSIDE DIAMETERS

HOSE OR SLEEVE CODE	TOLERANCE	HOSE SIZE /5/ .188	HOSE SIZE /5/ .250	HOSE SIZE /5/ .313	HOSE SIZE /5/ .375	HOSE SIZE /5/ .500	HOSE SIZE /5/ .625	HOSE SIZE /5/ .750	HOSE SIZE /5/ 1.000	HOSE SIZE /5/ 1.250	HOSE SIZE /5/ 1.500
-	MAX	.285	.343	.406	.469	.585	.687	.812	1.140	1.390	1.707
	MIN	.234	.304	.367	.430	.546	.641	.766	1.078	1.328	1.637
A	MAX	.390	.473	.524	.620	.715	.818	.955	1.295	1.550	1.841
	MIN	.320	.393	.454	.515	.645	.748	.870	1.210	1.450	1.771
B	MAX	.339	.409	.472	.535	.669	.767	.896	1.224	1.474	1.807
	MIN	.260	.330	.393	.456	.590	.681	.810	1.122	1.372	1.681
C	MAX	.692	.692	.780	.840	.970	1.090	1.220	1.590	1.900	2.190
	MIN	.533	.533	.598	.658	.778	.891	1.016	1.288	1.578	1.887
E	MAX	.301	.375	.438	.507	.635	.749	.887	1.228	1.440	1.761
	MIN	.248	.320	.383	.452	.578	.679	.811	1.146	1.358	1.667
F	MAX	.341	.411	.474	.547	.663	.769	.904	1.244	1.482	1.823
	MIN	.278	.348	.411	.484	.600	.699	.834	1.158	1.396	1.729
G	MAX	.692	.692	.780	.840	.970	1.090	1.220	1.590	1.900	2.190
	MIN	.533	.533	.598	.658	.778	.908	1.038	1.288	1.658	1.898
H	MAX	.641	.641	.704	.766	.891	1.016	1.141	1.454	1.704	2.016
	MIN	.537	.594	.657	.719	.844	.969	1.074	1.394	1.649	1.959
J	MAX	.641	.641	.704	.766	.891	1.016	1.141	1.454	1.704	2.016
	MIN	.532	.594	.657	.719	.844	.969	1.074	1.394	1.649	1.959
K	MAX	.378	.430	.499	.559	.665	.772	.887	1.210	1.460	1.782
	MIN	.320	.390	.450	.510	.625	.726	.841	1.148	1.398	1.712
L	MAX	.375	.445	.508	.571	.687	.789	.914	1.242	1.492	1.809
	MIN	.267	.333	.407	.470	.586	.681	.828	1.138	1.388	1.697

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
45° TO 45°

AS650

SHEET 3 OF 6

AS650

TABLE 5 - MAXIMUM WEIGHT

HOSE OR SLEEVE CODE OR FITTING	UNITS	HOSE SIZE .188	HOSE SIZE .250	HOSE SIZE .313	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.000	HOSE SIZE 1.250	HOSE SIZE 1.500
-	LB/IN	.005	.007	.008	.010	.012	.016	.020	.045	.058	.074
A	LB/IN	.003	.004	.004	.006	.007	.008	.010	.014	.020	.045
B	LB/IN	.001	.001	.002	.002	.003	.004	.004	.005	.006	.009
C	LB/IN	.009	.009	.011	.012	.017	.018	.028	.030	.040	.037
E	LB/IN	.001	.002	.002	.002	.003	.004	.006	.007	.007	.008
F	LB/IN	.002	.002	.002	.002	.003	.003	.005	.006	.006	.007
G	LB/IN	.009	.009	.011	.012	.017	.018	.028	.030	.040	.037
H	LB/IN	.018	.018	.023	.024	.032	.038	.045	.079	.100	.124
J	LB/IN	.018	.018	.023	.024	.032	.038	.045	.079	.100	.124
K	LB/IN	.009	.009	.011	.014	.018	.022	.027	.051	.063	.081
L	LB/IN	.003	.004	.004	.005	.008	.009	.011	.018	.022	.028
FIRESLEEVE CLAMP	LB/EA	.015	.016	.018	.019	.021	.023	.025	.029	.033	.037
FITTING END 45° /26/	LB CLASS I EA CLASS II	.051 --	.065 --	.080 --	.112 .055	.172 .080	.266 .110	.360 .165	.590 .275	1.110 .470	1.540 .640

TABLE 6 - SLEEVE LENGTH

HOSE SIZE	LENGTH
.188, .250, .313, .375	2.00 ± .25
.500, .625	2.50 ± .25
.750, 1.000	3.00 ± .25
1.250, 1.500	4.00 ± .25

TABLE 7 - DIMENSION J (SEE FIGURE 4)

SIZE CODE	J
3	.060
4	.044
5	.041
6	.042
8	.045
10	.055
12	.049
16	.093
20	.064
24	.095

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
METAL BRAID, MEDIUM PRESSURE, FLARELESS,
45° TO 45°

AS650

SHEET 4 OF 6