

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85049/39

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/39C, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/39C, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049 - 39

THIRD ANGLE PROJECTION



ISSUED 2000-05

PREPARED BY SAE SUBCOMMITTEE AE-8C1

SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL,
STRAIN RELIEF, 90°, SELF-LOCKING AND
NONSELF-LOCKING, CATEGORY 4C
(FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

AS85049/39
SHEET 1 OF 8

THE REQUIREMENTS FOR ACQUIRING THE ACCESSORIES DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF MIL-C-85049.

AS85049/39

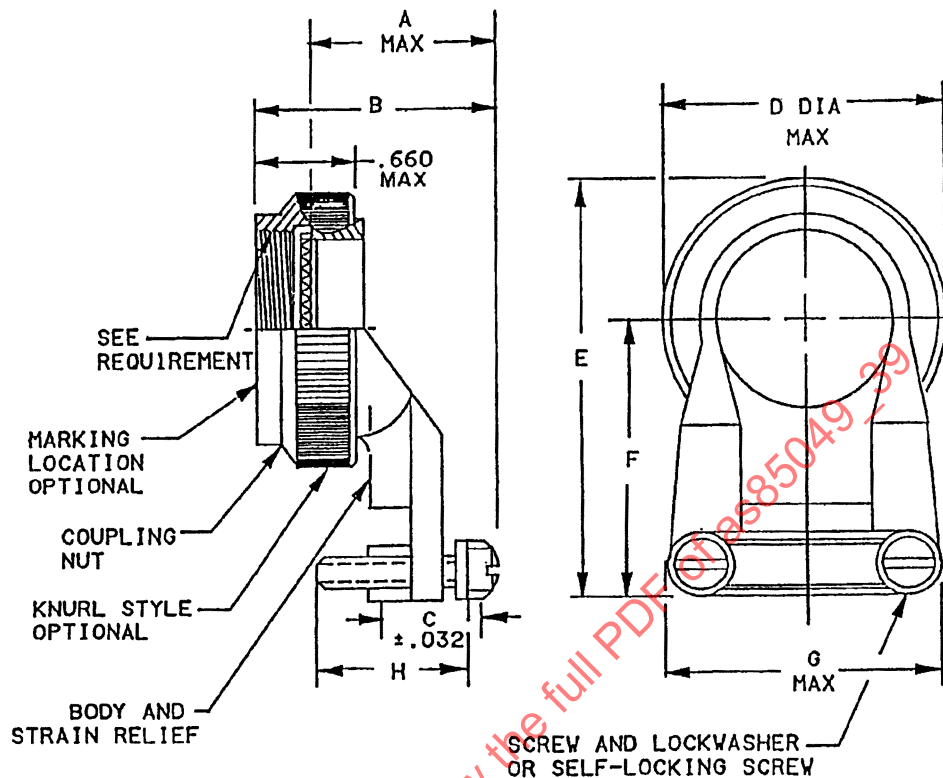


FIGURE 1. DIMENSION AND CONFIGURATION (SELF-LOCKING ONLY).

Shell sizes and dimensions

Connector shell size	Shell size code (REF)	A max	B max overall length	C wire bundle accommodation range		D max dia	E max	F max size	G max	H screw length	Screw size
				Min	Max						
9	A	1.01 (25.7)	1.20 (30.5)	.098 (2.49)	.234 (5.94)	.658 (21.79)	1.38 (35.1)	1.00 (25.4)	.85 (21.6)	.500 (12.70)	6-32
11	B	1.01 (25.7)	1.20 (30.5)	.153 (3.87)	.234 (5.94)	.984 (24.99)	1.53 (38.9)	1.10 (27.9)	.90 (22.9)	.500 (12.70)	6-32
13	C	1.21 (30.7)	1.40 (35.6)	.190 (4.83)	.328 (8.33)	1.157 (29.39)	1.60 (40.6)	1.10 (27.9)	1.10 (27.9)	.625 (15.86)	6-32
15	D	1.26 (32.0)	1.45 (36.8)	.260 (6.60)	.457 (11.61)	1.279 (32.45)	1.80 (45.7)	1.25 (31.8)	1.15 (29.2)	.750 (19.05)	6-32
17	E	1.41 (35.8)	1.60 (40.6)	.283 (7.19)	.614 (15.60)	1.406 (35.71)	1.93 (49.0)	1.30 (33.0)	1.30 (33.0)	.750 (19.05)	6-32

FIGURE 1. DIMENSIONS AND CONFIGURATIONS (SELF-LOCKING ONLY) - CONTINUED.

Shell sizes and dimensions

Connector shell size	Shell size code (REF)	A max	B max overall length	C wire bundle accommodation range		D max dia	E max	F max size	G max	H screw length	Screw size
				Min	Max						
19	F	1.51 (38.4)	1.70 (43.2)	.325 (8.26)	.634 (16.10)	1.516 (38.50)	2.05 (52.1)	1.35 (34.3)	1.50 (38.1)	.750 (19.05)	8-32
21	G	1.66 (42.2)	1.85 (47.0)	.343 (8.71)	.698 (17.73)	1.642 (41.70)	2.35 (59.7)	1.60 (40.6)	1.60 (40.6)	.875 (22.23)	8-32
23	H	1.76 (44.7)	1.95 (49.5)	.381 (9.68)	.823 (20.90)	1.768 (44.91)	2.58 (65.5)	1.75 (44.5)	1.70 (43.2)	1.000 (25.40)	8-32
25	J	1.91 (48.5)	2.10 (53.3)	.418 (10.62)	.853 (21.66)	1.889 (47.98)	2.73 (69.3)	1.85 (49.5)	1.80 (45.7)	1.125 (28.58)	8-32

NOTES:

1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.
4. Millimeters are in parentheses.

FIGURE 1. DIMENSIONS AND CONFIGURATIONS (SELF-LOCKING ONLY) - CONTINUED.

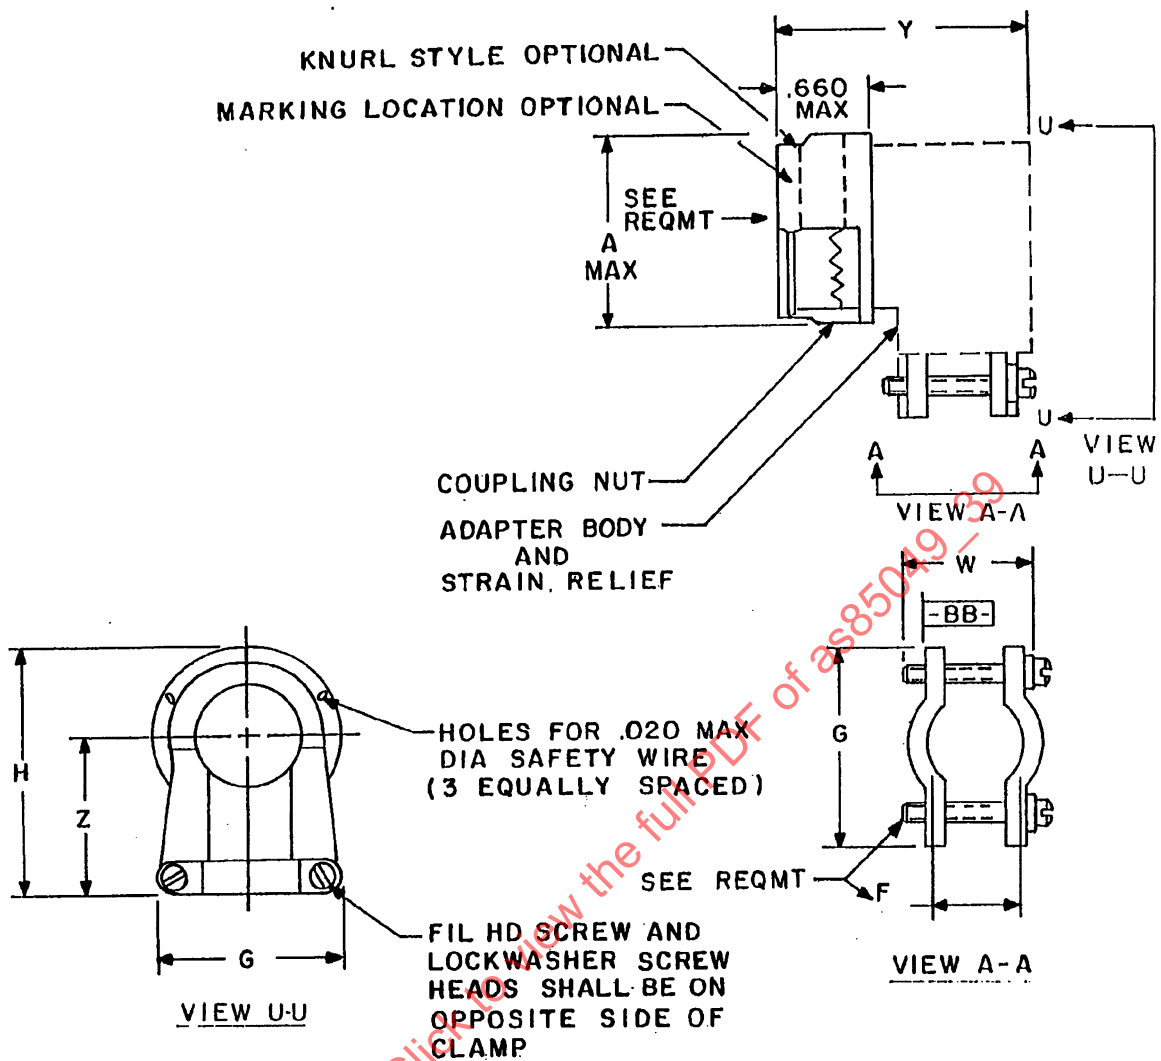


FIGURE 2. DIMENSIONS AND CONFIGURATIONS (NONSELF-LOCKING ONLY).

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL,
STRAIN RELIEF, 90°, SELF-LOCKING AND
NONSELF-LOCKING, CATEGORY 4C
(FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

AS85049/39

SHEET 5 OF 8

Shell size	A max dia of coupling ring	F wire bundle accommodation range		G max	Screw size	Y max	Z max	W ±.032 screw length	H max
		Min	Max						
9	.75 (19.1)	.098 (2.49)	.234 (5.94)	.85 (21.6)	6-32	1.20 (30.5)	1.00 (25.4)	.500 (12.70)	1.38 (35.1)
11	.85 (21.6)	.153 (3.87)	.234 (5.94)	.90 (22.9)	6-32	1.20 (30.5)	1.10 (27.9)	.500 (12.70)	1.53 (38.9)
13	1.00 (25.4)	.190 (4.83)	.328 (8.33)	1.10 (27.9)	6-32	1.40 (35.6)	1.10 (27.9)	.625 (15.88)	1.60 (40.6)
15	1.10 (27.9)	.260 (6.60)	.457 (11.61)	1.15 (29.2)	6-32	1.45 (36.8)	1.25 (31.8)	.750 (19.05)	1.80 (45.7)
17	1.25 (31.8)	.283 (7.19)	.614 (15.60)	1.30 (33.0)	6-32	1.60 (40.6)	1.30 (33.02)	.750 (19.05)	1.93 (49.0)
19	1.40 (35.6)	.325 (8.26)	.634 (16.10)	1.50 (38.1)	8-32	1.70 (43.2)	1.35 (34.3)	.750 (19.05)	2.05 (52.1)
21	1.50 (38.1)	.343 (8.71)	.698 (17.73)	1.60 (40.6)	8-32	1.85 (47.0)	1.60 (40.6)	.875 (22.23)	2.35 (59.7)
23	1.65 (41.9)	.381 (9.68)	.823 (20.90)	1.70 (43.2)	8-32	1.95 (49.5)	1.75 (44.5)	1.000 (25.40)	2.58 (65.5)
25	1.75 (44.5)	.418 (10.62)	.853 (21.67)	1.80 (45.7)	8-32	2.10 (53.3)	1.85 (47.0)	1.125 (28.58)	2.73 (69.3)

NOTES:

1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.
4. Millimeters are in parentheses.

FIGURE 2. DIMENSIONS AND CONFIGURATIONS (NONSELF-LOCKING ONLY) - CONTINUED.