

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS85049™/42

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISION IS REQUIRED TO IMPROVE DRAWINGS, MOVE NOTES TO DESIGN PARAGRAPH TO FOLLOW C1 AS STANDARD FORMAT, REMOVE IMAGES, CLARIFY RESTRICTIONS, ADD A METRIC TABLE TO ADDRESS LISTED DIMENSIONS SHOWN ON FIGURE 1.

NOTICE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF AS85049.


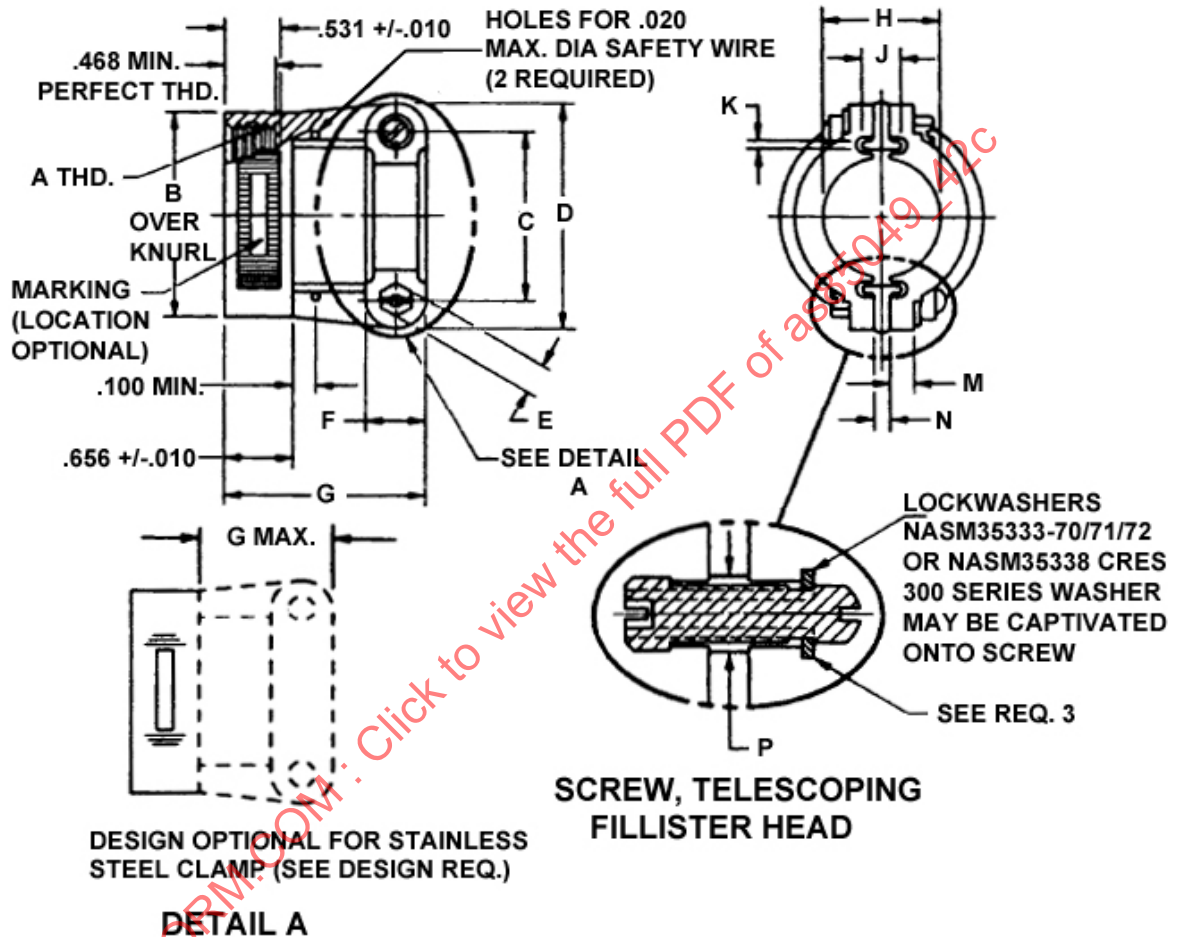


FIGURE 1 - ACCESSORY CONFIGURATION AND DIMENSIONS

For more information on this standard, visit
<https://www.sae.org/standards/content/AS85049/42C>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049



AEROSPACE STANDARD

(R) CONNECTOR ACCESSORIES, ELECTRICAL,
NONENVIRONMENTAL, STRAIN RELIEF, STRAIGHT,
CATEGORY 4A (FOR AS50151 SOLDER TYPE, V THREAD OF
MS310X CLASSES A, B, C, OR K CONNECTORS)

AS85049™/42
SHEET 1 OF 4

REV.
C

Copyright © 2021 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1998-08 REVISED 2016-10 REAFFIRMED 2021-05

TABLE 1 – FIGURE 1 METRIC EQUIVALENTS

INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS
.010	0.25	.100	2.54	.531	13.49
.020	0.51	.468	11.89	.656	16.66

TABLE 2 – FIGURE 1 DIMENSIONS

DASH NO.	A THREAD CLASS 2B	B DIA MAX	C ±.010 (0.25) ±.032 (0.813, FOR SIZE 8D ONLY)	D ±.020 (0.51)	E +.000 -.007 (0.18)	F ±.010 (0.25) ±.026 (0.660 FOR SIZE 8D ONLY)	G ±.020 (0.51)	H (SEE REQ. 4)	
								WIRE BUNDLE ACCOMMODATION RANGE	
								MIN	MAX
-4D	.625-24UNEF	.937 (23.80)	.637 (16.18)	.937 (23.80)	.250 (6.35)	.312 (7.92)	1.281 (32.54)	.125 (3.18)	.312 (7.92)
-6D	.750-20UNEF	1.031 (26.19)	.763 (19.38)	1.125 (28.58)	.250 (6.35)	.375 (9.53)	1.281 (32.54)	.250 (6.35)	.437 (11.10)
-8D	.875-20UNEF	1.250 (31.75)	.942 (23.93)	1.312 (33.32)	.250 (6.35)	.422 (10.72)	1.281 (32.54)	.312 (7.92)	.562 (14.27)
-10D	1.000-20UNEF	1.250 (31.75)	.964 (24.49)	1.312 (33.32)	.250 (6.35)	.437 (11.10)	1.281 (32.54)	.350 (8.89)	.625 (15.88)
-12D	1.1875-18UNEF	1.437 (36.50)	1.130 (28.70)	1.531 (38.89)	.250 (6.35)	.437 (11.10)	1.312 (33.32)	.500 (12.70)	.750 (19.05)
-16D	1.4375-18UNEF	1.688 (42.88)	1.375 (34.93)	1.750 (44.45)	.250 (6.35)	.531 (13.49)	1.406 (35.71)	.625 (15.88)	.937 (23.80)
-20D	1.750-18UNS	2.000 (50.80)	1.703 (43.26)	2.093 (53.16)	.312 (7.92)	.531 (13.49)	1.593 (40.46)	.875 (22.23)	1.250 (31.75)
-24D	2.000-18UNS	2.250 (57.15)	1.906 (48.41)	2.343 (59.51)	.312 (7.92)	.531 (13.49)	1.625 (41.28)	1.000 (25.40)	1.375 (34.93)
-28D	2.250-16UN	2.500 (63.50)	2.218 (56.34)	2.750 (69.85)	.312 (7.92)	.812 (20.62)	1.900 (48.26)	1.250 (31.75)	1.625 (41.28)
-32D	2.500-16UN	2.750 (69.85)	2.500 (63.50)	3.000 (76.20)	.312 (7.92)	.812 (20.62)	1.900 (48.26)	1.437 (36.50)	1.875 (47.63)

TABLE 2 – FIGURE 1 DIMENSIONS (CONTINUED)

DASH NO.	J DIA ±.010	K ±.010	M ±.010 (0.25) ±.018 (0.46, FOR SIZE 8D ONLY)	N ±.010	P ±.005	SCREW TELESCOPING, FILLISTER HEAD
-4D	.218 (5.54)	.062 (1.57)	.156 (3.96)	.109 (2.77)	.166 (4.22)	#4-40 UNC-2*
-6D	.281 (7.14)	.062 (1.57)	.175 (4.45)	.125 (3.18)	.166 (4.22)	#4-40 UNC-2*
-8D	.312 (7.92)	.062 (1.57)	.211 (5.36)	.125 (3.18)	.166 (4.22)	#4-40 UNC-2*
-10D	.312 (7.92)	.062 (1.57)	.218 (5.54)	.125 (3.18)	.166 (4.22)	#4-40 UNC-2*
-12D	.375 (9.53)	.062 (1.57)	.250 (6.35)	.156 (3.96)	.192 (4.88)	#6-32 UNC-2*
-16D	.375 (9.53)	.062 (1.57)	.250 (6.35)	.188 (4.78)	.192 (4.88)	#6-32 UNC-2*
-20D	.475 (12.07)	.078 (1.98)	.312 (7.92)	.188 (4.78)	.217 (5.51)	#8-32 UNC-2*
-24D	.500 (12.70)	.093 (2.36)	.312 (7.92)	.250 (6.35)	.217 (5.51)	#8-32 UNC-2*
-28D	.625 (15.88)	.093 (2.36)	.312 (7.92)	.375 (9.53)	.217 (5.51)	#8-32 UNC-2*
-32D	.675 (17.15)	.125 (3.18)	.312 (7.92)	.375 (9.53)	.217 (5.51)	#8-32 UNC-2*



AEROSPACE STANDARD
(R) CONNECTOR ACCESSORIES, ELECTRICAL,
NONENVIRONMENTAL, STRAIN RELIEF, STRAIGHT,
CATEGORY 4A (FOR AS50151 SOLDER TYPE, V THREAD OF
MS310X CLASSES A, B, C, OR K CONNECTORS)

AS85049™/42
SHEET 2 OF 4

**REV.
C**

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS85049.

1. DESIGN AND CONSTRUCTION:

ACCESSORIES SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLE 2. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE: .XX = ± 0.01 ; .XXX = ± 0.005 ; ANGULAR: X DEGREES = ± 1 DEGREE 00'; X DEGREES XX' = ± 0 DEGREES 30'. METRIC EQUIVALENTS ARE IN PARENTHESES, ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM (SEE TABLES 1 AND 2).

FOR THE STAINLESS STEEL CLAMP, THE DIMENSIONS F, G, J, K, M, N, P AND .656 ± 0.010 SHALL BE OPTIONAL, BUT SHALL NOT EXCEED THE DIMENSIONS LISTED IN TABLE 1.

2. THE AS85049/42 CLAMP IS USED TO PROVIDE STRAIN RELIEF FOR THE CONNECTOR ACCESSORIES AS85049/6, /7, /8, /9, /10, /11, /23, /24 AND /25.
3. WHEN THE CLAMP IS IN THE FULLY CLOSED POSITION THE TELESOPING SCREW AND NUT SHALL NOT BE FULLY MATED.
4. "WIRE BUNDLE ACCOMMODATION RANGE" DIMENSION IS DEFINED AS THE ENVELOPE AREA FOR THE WIRE BUNDLE. THIS DIMENSION IS NOT MEANT TO DEFINE THE CLAMP HARDWARE LIMITS.
5. MATERIAL AND FINISH: AS SPECIFIED IN TABLE 3 AND AS LISTED BELOW.

CLAMP ASSEMBLY SCREWS - CORROSION RESISTANT STEEL IN ACCORDANCE WITH SAE AS85049, PASSIVATED.

TABLE 3 - MATERIAL AND FINISH

COMPONENT	MATERIAL	FINISH
BODY	ALUMINUM ALLOY IN ACCORDANCE WITH AS85049	<u>1</u> / N, <u>2</u> / W, X, Y, <u>2</u> / Z
BODY	CORROSION RESISTANT STEEL IN ACCORDANCE WITH AS85049	<u>2</u> / B, S, XS, YS, <u>2</u> / ZS

1/ N FINISH NOT RECOMMENDED FOR USE IN APPLICATIONS THAT MAY BE SUSCEPTIBLE TO SALT WATER CORROSION.

2/ W, Z, B AND ZS FINISHES NOT RECOMMENDED FOR USE IN APPLICATIONS THAT MAY BE SUSCEPTIBLE TO OUT GASSING (ALSO SEE SPECIFICATION NOTES).

6. QUALIFICATION: IN ACCORDANCE WITH AS85049, CATEGORY 4A.

	AEROSPACE STANDARD	AS85049™/42 SHEET 3 OF 4	REV. C
	(R) CONNECTOR ACCESSORIES, ELECTRICAL, NONENVIRONMENTAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4A (FOR AS50151 SOLDER TYPE, V THREAD OF MS310X CLASSES A, B, C, OR K CONNECTORS)		