


REV. A	RATIONALE DOCUMENT HAS NOT REQUIRED CHANGES SINCE THE YEAR 2000, THEREFORE THE C1 COMMITTEE HAS REQUESTED THIS DOCUMENT BE STABILIZED.		FEDERAL SUPPLY CLASS 5935
SAE AS85049/44	STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE (TECHNICAL COMMITTEE) AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
NOTICE THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/44A, NOTICE 1, AMENDMENT 2 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/44A, NOTICE 1, AMENDMENT 2. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED. THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT. UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.			
CUSTODIAN: AE-8C1			
	AEROSPACE STANDARD CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4C (FOR MIL-C-83733 CONNECTORS)		SAE AS85049/44 SHEET 1 OF 4 REV. A

SAENORM.COM : Click to view the full PDF of standard AS85049/44A

THE REQUIREMENTS FOR ACQUIRING THE ACCESSORIES DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF MIL-C-85049.

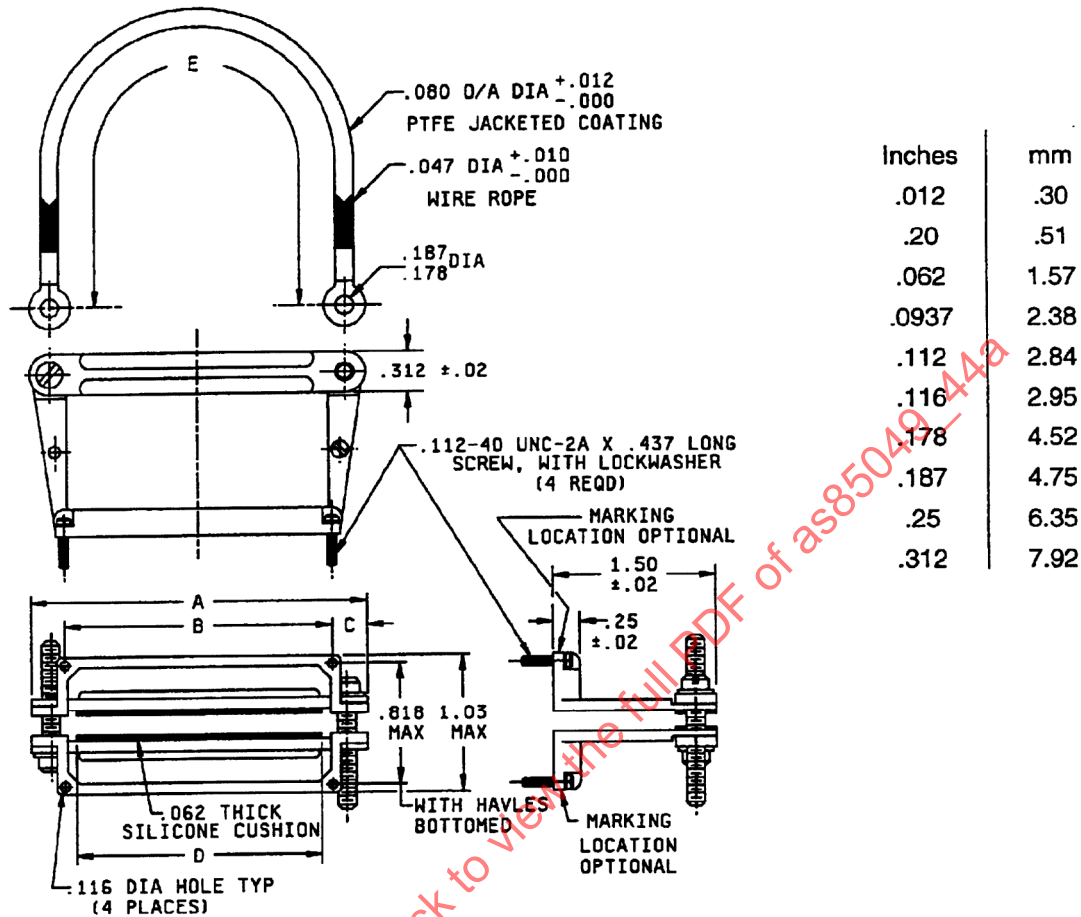


FIGURE 1. DIMENSIONS AND CONFIGURATION.

Part number	Dimensions						Lanyard
	Shell size	A ±.062 (1.57)	B ±.005 (.13)	C ±.032 (.81)	D ±.062 (1.57)	E ±.062 (1.57)	
M85049/44-1	A	2.437 (61.90)	1.895 (48.13)	.271 (6.88)	1.70 (43.18)		Without
M85049/44-2	B	3.750 (95.25)	3.195 (81.15)	.277 (7.04)	3.00 (76.20)		
M85049/44-3	A	2.437 (61.90)	1.895 (48.13)	.271 (6.88)	1.70 (43.18)	10.375 (263.53)	With
M85049/44-4	B	3.750 (95.25)	3.195 (81.15)	.277 (7.04)	3.00 (76.20)		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Dimensions apply after plating.

FIGURE 1. DIMENSIONS AND CONFIGURATION - CONTINUED.

SAENORM.COM : Click to view the full PDF of AS85049-44a