

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.  
D

AS85049™/49

FEDERAL SUPPLY CLASS  
5935

#### RATIONALE

REVISION IS REQUIRED TO ADD THE STATEMENT THAT AS85049/121 IS RECOMMENDED FOR NEW DESIGN, TO CORRECT PART NUMBER EXAMPLE ERRORS, TO IMPROVE DRAWING QUALITY, TO UPDATE FINISH RESTRICTION WORDING, AND TO UPDATE DOCUMENT FORMAT TO LATEST SAE GUIDELINES.

#### NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS85049.

AS85049/121 IS RECOMMENDED FOR NEW DESIGN.


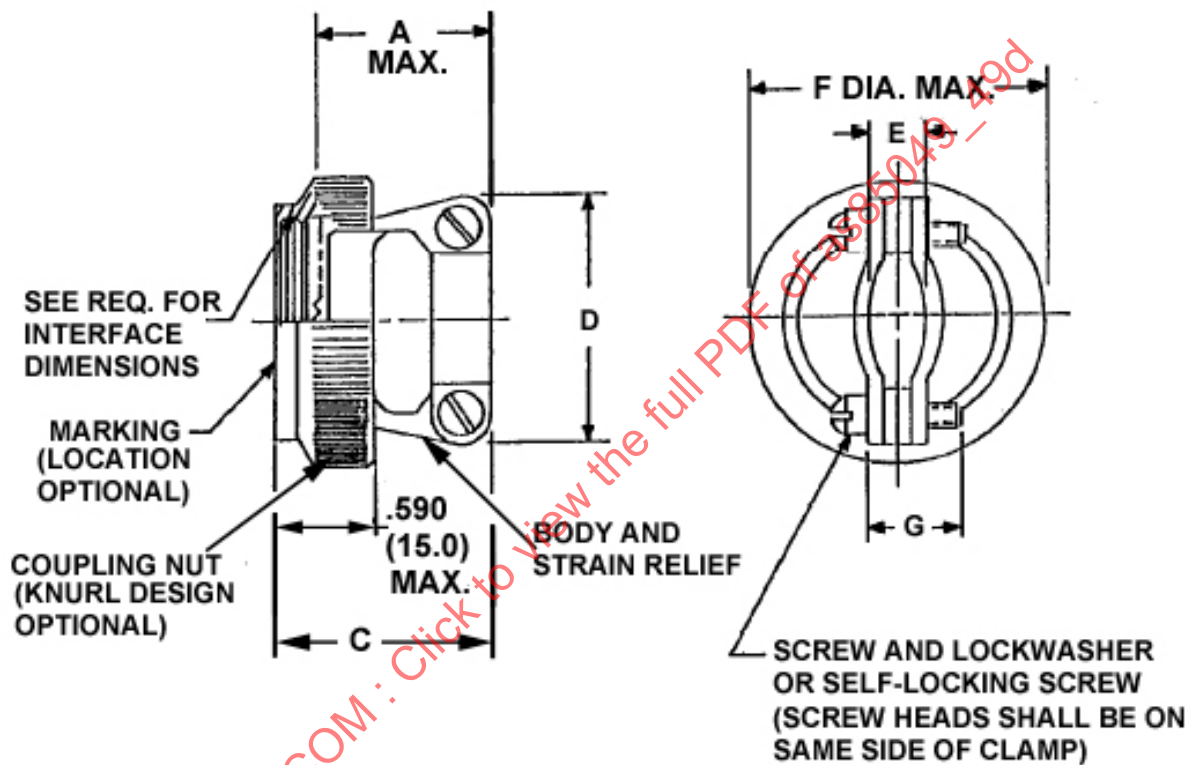


FIGURE 1 - DIMENSIONS AND CONFIGURATION (SELF-LOCKING ONLY)

For more information on this standard, visit

<https://www.sae.org/standards/content/AS85049/49D/>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8C1

PROCUREMENT SPECIFICATION: AS85049



#### AEROSPACE STANDARD

(R) CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, SELF-LOCKING AND NON-SELF-LOCKING, CATEGORY 4C  
(MIL-DTL-38999 SERIES I AND II CONNECTORS)

AS85049™/49  
SHEET 1 OF 4

REV.  
D

TABLE 1 - SHELL SIZES AND DIMENSIONS (SELF-LOCKING ONLY)

| DASH<br>NUMBER | CONNECTOR<br>SHELL SIZE |          | A<br>MAX.<br>(SEE REQ.) | C<br>MAX.   | D<br>MAX.   | E<br>WIRE BUNDLE<br>ACCOMMODATION<br>RANGE<br>(SEE REQ.) |              | F MAX. DIA.   | G<br>+.000 -.062<br>SCREW<br>LENGTH | SCREW<br>SIZE |
|----------------|-------------------------|----------|-------------------------|-------------|-------------|----------------------------------------------------------|--------------|---------------|-------------------------------------|---------------|
|                | SERIES II               | SERIES I |                         |             |             | MIN.                                                     | MAX.         |               |                                     |               |
| 8              | 8                       | 9        | .91 (23.1)              | 1.15 (29.2) | .85 (21.6)  | .098 (2.49)                                              | .234 (5.94)  | .859 (21.82)  | .500 (12.70)                        | 6-32          |
| 10             | 10                      | 11       | .91 (23.1)              | 1.15 (29.2) | .90 (22.9)  | .153 (3.89)                                              | .234 (5.94)  | .984 (24.99)  | .500 (12.70)                        | 6-32          |
| 12             | 12                      | 13       | 1.01 (25.7)             | 1.25 (31.8) | 1.10 (27.9) | .190 (4.83)                                              | .328 (8.33)  | 1.156 (29.36) | .625 (15.88)                        | 6-32          |
| 14             | 14                      | 15       | 1.06 (26.9)             | 1.30 (33.0) | 1.15 (29.2) | .260 (6.60)                                              | .457 (11.61) | 1.281 (32.54) | .750 (19.05)                        | 6-32          |
| 16             | 16                      | 17       | 1.16 (29.5)             | 1.40 (35.6) | 1.30 (33.0) | .283 (7.19)                                              | .614 (15.60) | 1.406 (35.71) | .750 (19.05)                        | 6-32          |
| 18             | 18                      | 19       | 1.41 (35.8)             | 1.65 (41.9) | 1.50 (38.1) | .325 (8.26)                                              | .634 (16.10) | 1.516 (38.51) | .750 (19.05)                        | 8-32          |
| 20             | 20                      | 21       | 1.51 (38.4)             | 1.75 (44.5) | 1.60 (40.6) | .343 (8.71)                                              | .698 (17.73) | 1.641 (41.68) | .875 (22.23)                        | 8-32          |
| 22             | 22                      | 23       | 1.66 (42.2)             | 1.90 (48.3) | 1.70 (43.2) | .381 (9.68)                                              | .823 (20.90) | 1.766 (44.86) | 1.000 (25.40)                       | 8-32          |
| 24             | 24                      | 25       | 1.76 (44.7)             | 2.00 (50.8) | 1.80 (45.7) | .418 (10.62)                                             | .853 (21.67) | 1.891 (48.03) | 1.125 (28.58)                       | 8-32          |

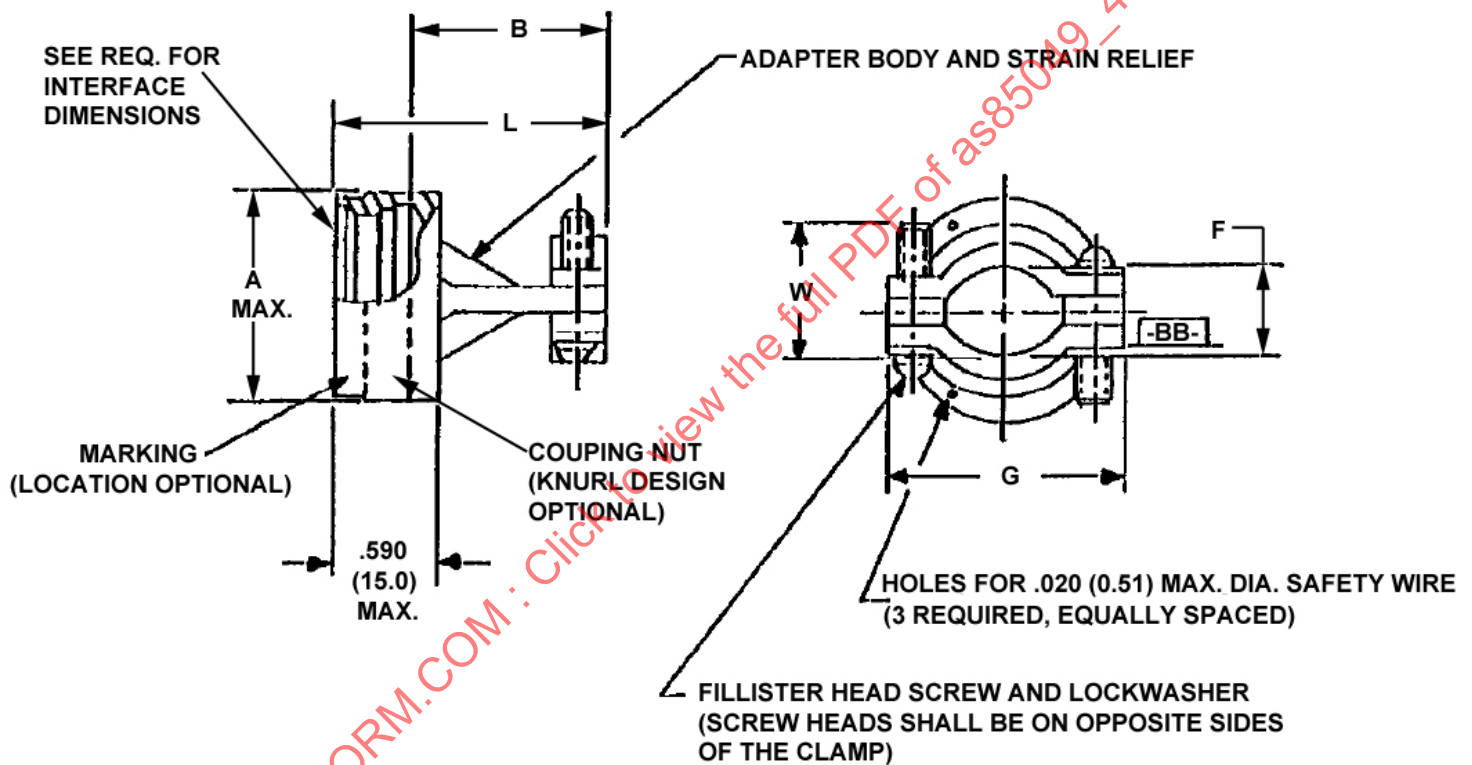


FIGURE 2 - DIMENSIONS AND CONFIGURATIONS (NON-SELF-LOCKING ONLY)

**TABLE 2 - SHELL SIZES AND DIMENSIONS (NON-SELF-LOCKING ONLY)**

| DASH<br>NUMBER | CONNECTOR<br>SHELL SIZE |          | A<br>MAX.<br>(DIAMETER<br>OF<br>COUPLING<br>RING) | B<br>MAX<br>(SEE REQ.) | F<br>WIRE BUNDLE<br>ACCOMMODATION<br>RANGE<br>(SEE REQ.) |              | G<br>MAX.   | L<br>MAX.   | W<br>+.000 -.062<br>SCREW<br>LENGTH | SCREW<br>SIZE |
|----------------|-------------------------|----------|---------------------------------------------------|------------------------|----------------------------------------------------------|--------------|-------------|-------------|-------------------------------------|---------------|
|                | SERIES II               | SERIES I |                                                   |                        | MIN.                                                     | MAX.         |             |             |                                     |               |
| 8              | 8                       | 9        | .75 (19.1)                                        | .91 (23.1)             | .098 (2.49)                                              | .234 (5.94)  | .85 (21.6)  | 1.10 (27.9) | .500 (12.70)                        | 6-32          |
| 10             | 10                      | 11       | .85 (21.6)                                        | .91 (23.1)             | .153 (3.89)                                              | .234 (5.94)  | .90 (22.9)  | 1.10 (27.9) | .500 (12.70)                        | 6-32          |
| 12             | 12                      | 13       | 1.00 (25.4)                                       | 1.01 (25.7)            | .190 (4.83)                                              | .328 (8.33)  | 1.10 (27.9) | 1.20 (30.5) | .625 (15.88)                        | 6-32          |
| 14             | 14                      | 15       | 1.10 (27.9)                                       | 1.06 (26.9)            | .260 (6.60)                                              | .457 (11.61) | 1.15 (29.2) | 1.25 (31.8) | .750 (19.05)                        | 6-32          |
| 16             | 16                      | 17       | 1.25 (31.8)                                       | 1.16 (29.5)            | .283 (7.19)                                              | .614 (15.60) | 1.30 (33.0) | 1.36 (34.5) | .750 (19.05)                        | 6-32          |
| 18             | 18                      | 19       | 1.40 (35.6)                                       | 1.41 (35.8)            | .325 (8.26)                                              | .634 (16.10) | 1.50 (38.1) | 1.60 (40.6) | .750 (19.05)                        | 8-32          |
| 20             | 20                      | 21       | 1.50 (38.1)                                       | 1.51 (38.4)            | .343 (8.71)                                              | .698 (17.73) | 1.60 (40.6) | 1.70 (43.2) | .875 (22.23)                        | 8-32          |
| 22             | 22                      | 23       | 1.65 (41.9)                                       | 1.66 (42.2)            | .381 (9.68)                                              | .823 (20.90) | 1.70 (43.2) | 1.85 (47.0) | 1.000 (25.40)                       | 8-32          |
| 24             | 24                      | 25       | 1.75 (44.5)                                       | 1.76 (44.7)            | .418 (10.62)                                             | .853 (21.67) | 1.80 (45.7) | 1.95 (49.5) | 1.125 (28.58)                       | 8-32          |

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF AS85049.

1. DESIGN AND CONSTRUCTION:

ACCESSORIES SHALL BE DESIGNED IN ACCORDANCE WITH FIGURES 1 AND 2, AND TABLES 1 AND 2. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. METRIC EQUIVALENTS ARE IN PARENTHESIS, ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MILLIMETERS. THE A DIMENSION IN FIGURE 1 AND THE B DIMENSION IN FIGURE 2 ARE MEASURED FROM THE BOTTOM OF THE ACCESSORY TEETH TO THE END OF THE CLAMP.

2. INTERFACE DIMENSIONS SHALL BE IN ACCORDANCE WITH AS85049, FIGURE 2.

3. THE ACCESSORY SHALL CONSIST OF A COUPLING NUT AND BODY. THE COUPLING NUT SHALL BE CAPTIVATED TO AND SHALL BE ROTATABLE ON THE BODY.

4. THE CLAMP SHALL HAVE NO PROTRUSIONS OR SHARP EDGES WHICH MAY PINCH CABLE.

5. DETENTED SELF-LOCKING PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING. OPTION "N" IS A FREE SPINNING SELF-LOCKING COUPLING.

6. WIRE BUNDLE ACCOMMODATION RANGE DIMENSION (F) IS DEFINED AS THE ENVELOPE AREA OF THE WIRE BUNDLE. THIS DIMENSION IS NOT MEANT TO DEFINE THE CLAMP HARDWARE LIMITS.

7. MATERIAL AND FINISH: ACCESSORIES SHALL BE AS SHOWN IN TABLE 3. CLAMP SCREW AND LOCKWASHERS: 300 SERIES CORROSION-RESISTANT STEEL, PASSIVATE.

**TABLE 3 - MATERIAL AND FINISH**

| FIGURE | MATERIAL                                                        | FINISH                               |
|--------|-----------------------------------------------------------------|--------------------------------------|
| 1 & 2  | ALUMINUM ALLOY IN ACCORDANCE WITH AS85049                       | A, N <sup>1/</sup> , W <sup>2/</sup> |
| 1 & 2  | CORROSION RESISTANT STEEL 300 SERIES IN ACCORDANCE WITH AS85049 | S                                    |

<sup>1/</sup> N FINISH NOT RECOMMENDED FOR USE IN APPLICATIONS THAT MAY BE SUSCEPTIBLE TO SALT WATER CORROSION.

<sup>2/</sup> W FINISH IS NOT RECOMMENDED FOR USE IN APPLICATIONS THAT MAY BE SUSCEPTIBLE TO OUT-GASSING (ALSO SEE SPECIFICATION NOTES)

8. QUALIFICATION: SEE AS85049, CATEGORY 4C.