

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85049/51

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/51C AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/51C. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as85049-51

THIRD ANGLE PROJECTION



ISSUED 1998-08

PREPARED BY SUBCOMMITTEE AE-8C1


SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, NONENVIRONMENTAL, 90°, SELF-LOCKING AND NON-SELF-LOCKING CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

AS85049/51
SHEET 1 OF 7

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.

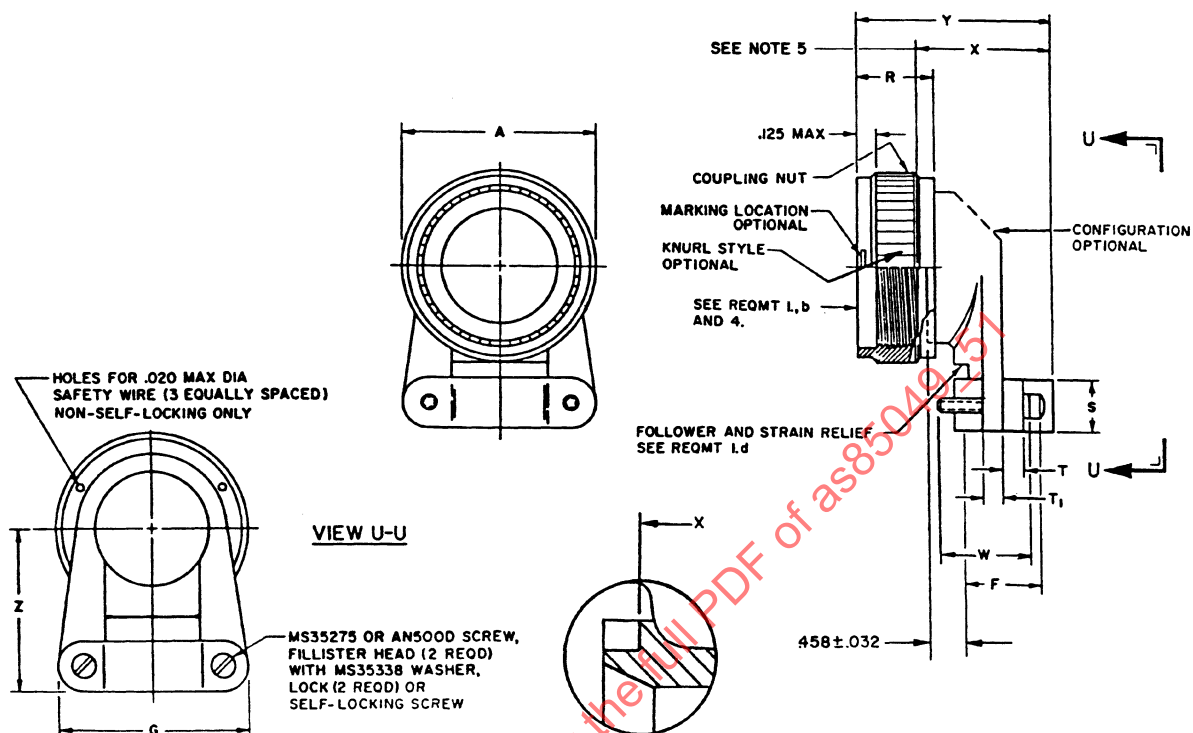

NON-SELF-LOCKING AND SELF-LOCKING

FIGURE 1. CONFIGURATION AND DIMENSIONS.

TABLE I. SHELL SIZE, DASH NUMBERS AND DIMENSIONS.

Dash No.	For Connector Shell, Size (Ref)				Non-Self-Locking						Self-Locking			
	MIL-C-81703 Series 3	MIL-C-26482 Series 2	MIL-C-5015 Crimp	MIL-C-83723 Series III	A Max Dia	R Max	Fillister Head Screw		X Max	Y Max	A Max Dia	R Max	X Max	Y Max
							AN500D Dash No.	MS35275 Dash No.						
-3	3				.669	.540	6-8	230	.78	1.101				
-8		8	8S	8	.617	↑	6-8	230	.78	1.101	.885	.710	.93	1.257
-10		10	10S&10SL	10	.734		6-8	230	.86	1.183	1.010	↑	1.02	1.339
-12	7	12	12S&12	12	.858		6-10	231	1.05	1.376	1.135		1.21	1.532
-14	12	14	14S&14	14	.984		6-10	231	1.11	1.436	1.260		1.27	1.592
-16	19	16	16S&16	16	1.112		6-10	231	1.26	1.585	1.385		1.42	1.741
-18	27	18	18	18	1.218		8-12	247	1.37	1.697	1.510		1.53	1.853
-20	37	20	20	20	1.345		8-14	248	1.50	1.822	1.635		1.65	1.978
-22		22	22	22	1.468	↓	8-16	249	1.62	1.947	1.760	↓	1.78	2.108
-24		24	24	24	1.593	.540	8-18	N/A	1.75	2.072	1.885	.710	1.90	2.228
-28			28		1.969	.702	8-20	250	1.89	2.372	2.135	.890	2.20	2.528
-32			32		2.219	↑	416-20	284	1.95	2.435	2.395	↑	2.27	2.591
-36			36		2.469		416-24	285	2.07	2.560	2.635		2.39	2.716
-40			40		2.719		416-24	285	2.20	2.685	2.885		2.52	2.841
-44			44		2.969	↓	416-28	286	2.45	2.935	3.135	↓	2.77	3.091
-48			48		3.219	.702	416-32	297	2.57	3.060	3.385	.890	2.89	3.216
-61	61				1.653	.540	8-18	N/A	1.75	2.072				

TABLE I. SHELL SIZE, DASH NUMBERS AND DIMENSIONS (CONTINUED).

Non-Self-Locking and Self-Locking									
Dash No.	F (see Note 5) Wire Bundle Accommodation Range		G +.020	S +.020	T T ₁ +.015	Z +.062	MS35338 Washer, Lock Dash Number	W +.032 Screw Length	Screw Size
	Max	Min							
-3 1/	.204	.125	.732	.250	.125	.777	136	.500	6-32
-8	.204	.125	.732	↑	↑	.746	↑	.500	↑
-10	.286	.187	.812	↑	↑	.805	↑	.500	↑
-12	.416	.291	.968	↑	↑	.867	↑	.625	↑
-14	.476	.351	1.026	↓	↓	.930	↓	.625	↓
-16	.626	.501	1.299	.250	.125	.994	136	.625	6-32
-18	.706	.518	1.431	.375	.156	1.171	137	.750	8-32
-20	.831	.581	1.537	↑	↑	1.234	↑	.875	↑
-22	.956	.644	1.633	↓	↓	1.296	↓	1.000	↓
-24	1.081	.706	1.755	.375	.156	1.358	↓	1.125	↓
-28	1.187	.750	2.000	.500	.188	1.572	137	1.250	8-32
-32	1.250	.875	2.366	↑	↑	1.797	139	1.250	1/4-20
-36	1.375	.938	2.476	↓	↓	1.922	↑	1.500	↑
-40	1.500	.938	2.546	.500	↓	2.047	↓	1.500	↓
-44	1.750	1.188	2.840	.625	↓	2.296	↓	1.750	↓
-48	1.875	1.312	3.324	.625	.188	2.421	139	2.000	1/4-20
-61 1/	1.081	.706	1.755	.375	.156	1.388	137	1.125	8-32

1/ Not available on self-locking configuration.

AS85049/51

Inch	mm	Inch	mm	Inch	mm	Inch	mm
0.015	0.380	0.885	22.470	1.420	36.060	2.135	54.220
0.020	0.500	0.890	22.600	1.431	36.340	2.200	55.880
0.032	0.810	0.930	23.620	1.436	36.470	2.219	56.360
0.062	1.570	0.938	23.820	1.468	37.280	2.228	56.590
0.125	3.170	0.956	24.280	1.500	38.100	2.270	57.650
0.156	3.960	0.968	24.580	1.510	38.350	2.296	58.310
0.187	4.740	0.984	24.990	1.530	38.860	2.366	60.090
0.188	4.770	0.994	25.240	1.532	38.910	2.372	60.240
0.204	5.180	1.000	25.400	1.537	39.030	2.390	60.700
0.250	6.350	1.010	25.650	1.572	39.920	2.395	60.830
0.286	7.260	1.020	25.900	1.585	40.250	2.421	61.490
0.291	7.390	1.026	26.060	1.592	40.430	2.435	61.840
0.351	8.910	1.050	26.670	1.593	40.460	2.450	62.230
0.375	9.520	1.081	27.450	1.620	41.140	2.469	62.710
0.416	10.560	1.087	27.600	1.633	41.470	2.476	62.890
0.476	12.090	1.100	27.940	1.635	41.520	2.520	64.000
0.500	12.700	1.110	28.190	1.650	41.910	2.528	64.210
0.501	12.720	1.112	28.240	1.653	41.980	2.546	64.666
0.518	13.150	1.125	28.570	1.697	43.100	2.560	65.020
0.540	13.710	1.126	28.600	1.700	43.180	2.570	65.270
0.581	14.750	1.135	28.820	1.741	44.220	2.591	65.810
0.617	15.670	1.137	28.870	1.750	44.450	2.635	66.920
0.625	15.870	1.171	29.740	1.755	44.570	2.685	68.190
0.626	15.900	1.183	30.040	1.760	44.700	2.716	68.980
0.644	16.350	1.188	30.170	1.797	45.640	2.719	69.060
0.669	16.990	1.210	30.730	1.822	46.270	2.770	70.350
0.702	17.830	1.218	30.930	1.853	47.060	2.840	72.130
0.706	17.430	1.234	31.340	1.875	47.620	2.841	72.160
0.730	18.540	1.250	31.750	1.885	47.870	2.885	73.270
0.734	18.640	1.257	31.920	1.890	48.000	2.890	73.400
0.746	18.940	1.270	32.250	1.900	48.260	2.935	74.540
0.750	19.050	1.246	32.910	1.922	48.810	2.969	75.410
0.777	19.730	1.299	32.990	1.947	49.450	2.970	75.430
0.780	19.810	1.312	33.320	1.950	49.530	3.011	76.470
0.805	20.440	1.339	34.010	1.969	50.010	3.060	77.720
0.812	20.620	1.345	34.160	1.978	50.240	3.135	79.620
0.831	21.100	1.358	34.490	2.000	50.800	3.216	81.680
0.858	21.79	1.375	34.920	2.047	51.990	3.219	81.760
0.860	21.840	1.376	34.950	2.070	52.570	3.324	84.420
0.867	22.020	1.385	35.170	2.072	52.620	3.385	85.976
0.875	22.220	1.388	35.250	2.108	53.540		

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF,
NONENVIRONMENTAL, 90°, SELF-LOCKING AND NON-SELF-LOCKING
CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2,
MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

AS85049/51
SHEET 5 OF 7