

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85049/52

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/52C AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/52C. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as85049 - 52

THIRD ANGLE PROJECTION



ISSUED 1998-08

PREPARED BY SUBCOMMITTEE AE-8C1

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, NONENVIRONMENTAL, SELF-LOCKING AND NON-SELF-LOCKING, STRAIGHT, CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

AS85049/52
SHEET 1 OF 7

Copyright 1998 Society of Automotive Engineers, Inc.
All rights reserved.

Printed in the U.S.A.


QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8510

FAX: (724) 776-0243

SAE WEB ADDRESS:

<http://www.sae.org>

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.

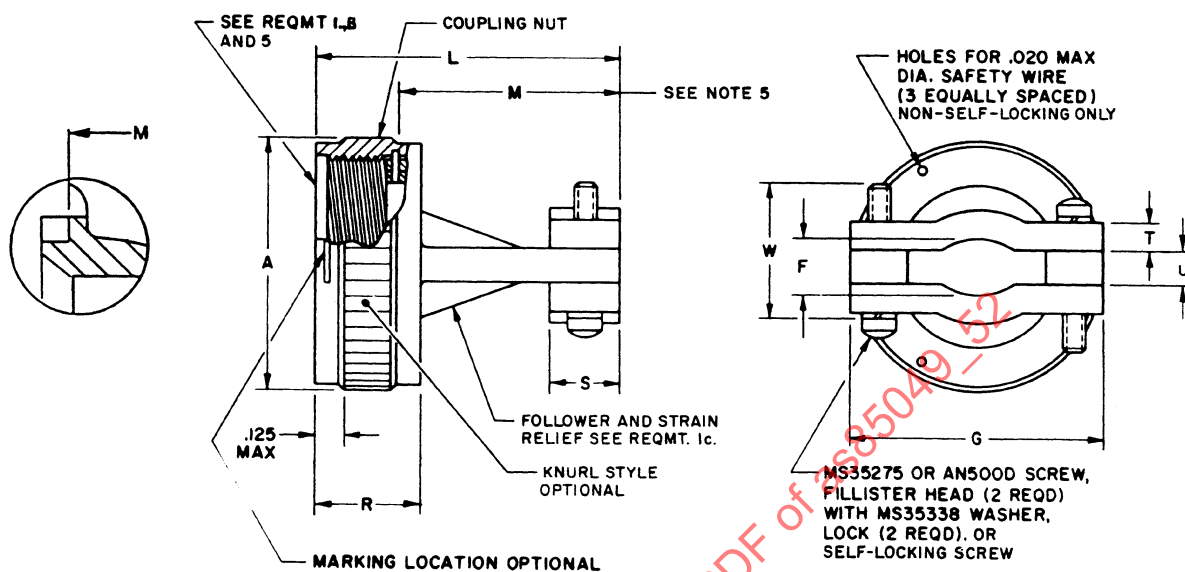

NON-SELF-LOCKING OR SELF-LOCKING COUPLING

FIGURE 1. CONFIGURATION AND DIMENSIONS.

TABLE I. DIMENSIONS.

Dash No.	For Connector Shell, Size (Ref)				Non-Self-Locking						Self-Locking			
	MIL-C-81703 Series 3	MIL-C-26482 Series 2	MIL-C-5015 Crimp	MIL-C-83723 Series III	A Max Dia	L +.062	M Max	R Max	Fillister Head Screw		A Max Dia	L Max	M Max	R Max
									AN5000 Dash Number	MS35275 Dash Number				
-3	3				.669	.890	.63	.540	6-8	230				
-8		8	8S	8	.617	.890	.63		6-8	230	.885	1.04	.73	.710
-10		10	10S&10SL	10	.734	1.000	.74		6-8	230	1.010	1.16	.85	.710
-12	7	12	12S&12	12	.858	1.125	.86		6-10	231	1.135	1.29	.98	.710
-14	12	14	14S&14	14	.984	1.125	.86		6-10	231	1.260	1.29	.98	.710
-16	19	16	16S&16	16	1.112	1.250	.99		6-10	231	1.385	1.41	1.10	.710
-18	27	18	18	18	1.218	1.500	1.24		8-12	247	1.510	1.66	1.35	.710
-20	37	20	20	20	1.345	1.625	1.36		8-14	248	1.635	1.79	1.48	.710
-22		22	22	22	1.468	1.750	1.49		8-16	249	1.760	1.91	1.60	.710
-24		24	24	24	1.593	1.875	1.61	.540	8-18	N/A	1.885	2.04	1.73	.710
-28			28		1.969	2.187	1.76	.702	8-20	250	2.135	2.35	1.88	.890
-32			32		2.219	2.375	1.95		416-20	284	2.395	2.60	2.13	.890
-36			36		2.469	2.750	2.33		416-24	285	2.635	2.91	2.44	.890
-40			40		2.719	2.938	2.51		416-24	285	2.885	3.10	2.63	.890
-44			44		2.969	3.312	2.89		416-28	286	3.135	3.47	3.00	.890
-48			48		3.219	3.687	3.26	.702	416-32	287	3.385	3.87	3.40	.890
-61	61				1.653	1.875	1.61	.640	8-18	N/A				

N/A = Not Available

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF,
NONENVIRONMENTAL, SELF-LOCKING AND NON-SELF-LOCKING, STRAIGHT,
CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703
SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

Non-Self-Locking and Self-Locking									
Dash Number	F (see Note 4)		G +.020	S +.020	T +.015	U +.020	W +.032 Screw Length	Screw Size	MS35338 Washer Lock Dash Number
	Wire Bundle Accommodation Range								
	Max	Min							
-3 1/	.204	.125	.732		.125	.125	.500	6-32	136
-8	.204	.125	.732	↑	↑	↑	.500	6-32	↑
-10	.286	.187	.812				.500	6-32	
-12	.416	.291	.968				.625	6-32	
-14	.476	.351	1.026	↓	↓	↓	.625	6-32	↓
-16	.625	.501	1.299	.250	.125	.125	.625	6-32	136
-18	.706	.518	1.431	.375	.156	.156	.750	8-32	137
-20	.831	.581	1.537	↑	↑	.156	.875	8-32	↑
-22	.956	.644	1.633	↓	↓	.156	1.000	8-32	
-24	1.081	.706	1.755	.375	.156	.188	1.125	8-32	↓
-28	1.187	.750	2.000	.500	.188	.250	1.250	8-32	137
-32	1.250	.875	2.366	↑	↑	.250	1.250	1/4-20	139
-36	1.375	.938	2.476	↓		.375	1.500	1/4-20	↑
-40	1.500	.938	2.546	.500		↑	1.500	1/4-20	
-44	1.750	1.188	2.840	.625	↓	↓	1.750	1/4-20	↓
-48	1.875	1.312	3.324	.625	.188	.375	2.000	1/4-20	139
-61 1/	1.081	.706	1.755	.375	.156	.188	1.125	8-32	137

1/ Not available on self-locking configuration.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.015	0.380	0.750	19.050	1.385	35.170	2.187	55.540
0.020	0.500	0.812	20.620	1.345	34.160	2.190	55.620
0.032	0.810	0.831	21.100	1.350	34.290	2.260	57.400
0.062	1.570	0.850	21.590	1.360	34.540	2.330	59.180
0.125	3.170	0.858	21.790	1.375	34.920	2.350	59.690
0.161	4.080	0.860	21.840	1.410	35.81	2.366	60.090
0.166	4.210	0.875	22.220	1.431	36.340	2.375	60.320
0.187	4.740	0.885	22.470	1.468	37.280	2.395	60.83
0.188	4.770	0.890	22.60	1.480	37.590	2.440	61.97
0.204	5.180	0.938	23.82	1.500	38.100	2.469	62.710
0.250	6.350	0.956	24.280	1.510	38.350	2.476	62.890
0.286	7.260	0.968	24.580	1.537	39.030	2.510	63.750
0.297	7.540	0.980	24.890	1.593	40.460	2.600	66.040
0.351	8.910	0.984	24.990	1.600	40.640	2.630	66.800
0.375	9.520	0.990	25.140	1.625	41.270	2.635	66.920
0.416	10.560	1.000	25.400	1.633	41.470	2.719	69.060
0.476	12.090	1.010	25.650	1.635	41.520	2.750	69.850
0.500	12.700	1.026	26.060	1.653	41.980	2.840	72.130
0.501	12.720	1.040	26.400	1.660	42.160	2.885	73.270
0.540	13.710	1.081	27.450	1.730	43.940	2.895	73.530
0.518	13.150	1.100	27.940	1.750	44.450	2.910	73.910
0.581	14.750	1.112	28.240	1.755	44.570	2.938	74.620
0.617	15.670	1.125	28.570	1.760	44.700	2.969	75.410
0.625	15.870	1.135	28.820	1.790	45.460	3.000	76.200
0.630	16.000	1.160	29.460	1.875	47.620	3.100	78.740
0.640	16.250	1.187	30.140	1.880	47.750	3.135	79.620
0.644	16.350	1.188	30.170	1.885	47.870	3.212	81.580
0.669	16.990	1.218	30.930	1.910	48.510	3.319	84.300
0.702	17.830	1.240	31.490	1.950	49.530	3.324	84.420
0.706	17.930	1.250	31.750	1.969	50.010	3.385	85.970
0.710	18.030	1.260	32.000	2.000	50.800	3.400	86.360
0.730	18.540	1.295	32.850	2.040	51.810	3.470	88.130
0.732	18.590	1.299	32.990	2.130	54.100	3.687	93.640
0.734	18.640	1.312	33.320	2.135	54.220	3.870	98.290
0.740	18.79						

REQUIREMENTS:

1. DESIGN AND CONSTRUCTION:

- a. DIMENSIONS AND CONFIGURATION: SEE FIGURE 1 AND TABLE I.
- b. INTERFACE DIMENSIONS SHALL BE IN ACCORDANCE WITH MIL-C-85049, FIGURE 4.
- c. ACCESSORY CONSISTS OF A COUPLING NUT AND FOLLOWER. THE COUPLING NUT SHALL BE CAPTIVATED TO AND FREE TO ROTATE ON THE FOLLOWER.
- d. CLAMPS SHALL HAVE NO PROTRUSIONS OR SHARP EDGES WHICH MAY PINCH CABLE.

2. MATERIAL AND FINISH: SEE TABLE II.

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF,
NONENVIRONMENTAL, SELF-LOCKING AND NON-SELF-LOCKING, STRAIGHT,
CATEGORY 4B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703
SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

AS85049/52

SHEET 5 OF 7