


WRENCHING CONFIGURATION, 12 POINT THREADED FASTENERS

Issued 6-15-65
Revised

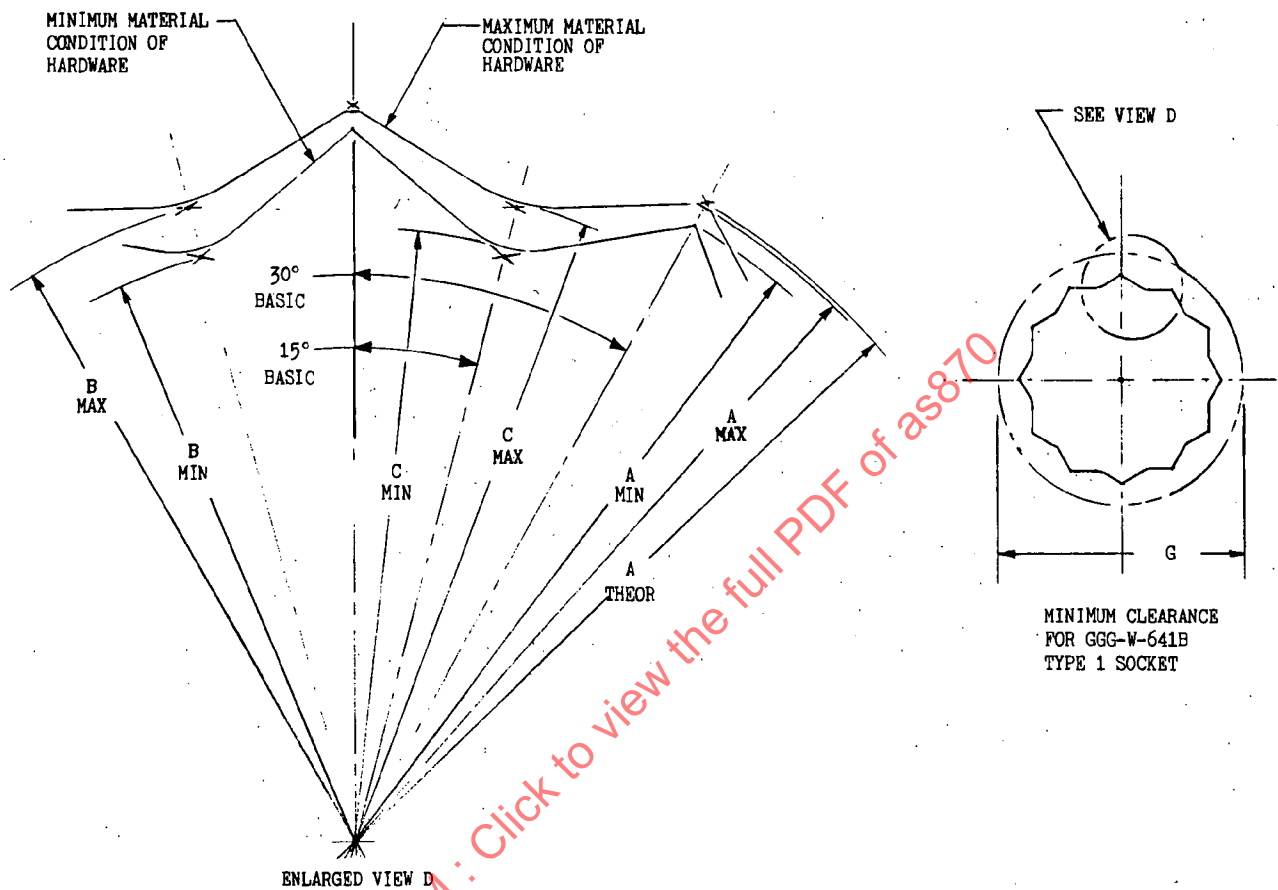

NOMINAL HEAD SIZE	MAXIMUM MATERIAL CONDITION				MINIMUM MATERIAL CONDITION			G MIN
	A DIA THEOR	A DIA MAX	B DIA MAX	C DIA MAX	A DIA MIN	B DIA MIN	C DIA MIN	
.1875	.2184	.218	.195	.197	.210	.177	.183	.315
.2188	.2545	.254	.228	.229	.245	.208	.213	.356
.2500	.2906	.290	.260	.262	.280	.237	.245	.397
.2812	.3267	.326	.292	.294	.315	.268	.275	.438
.3125	.3627	.361	.325	.326	.350	.299	.308	.478
.3750	.4349	.434	.389	.392	.422	.359	.370	.559
.4375	.5080	.507	.454	.458	.493	.419	.431	.683
.5000	.5812	.580	.520	.524	.565	.481	.494	.751
.5625	.6533	.651	.585	.588	.636	.541	.556	.814
.6250	.7255	.724	.649	.654	.707	.602	.619	.892
.6875	.7986	.797	.714	.720	.779	.664	.681	.968
.7500	.8698	.868	.778	.784	.849	.724	.743	1.055