

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS90387

FEDERAL SUPPLY CLASS
5120

RATIONALE

CONTINUOUS IMPROVEMENT OF TOOLS TO ENHANCE STRAP PERFORMANCE.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS81306.


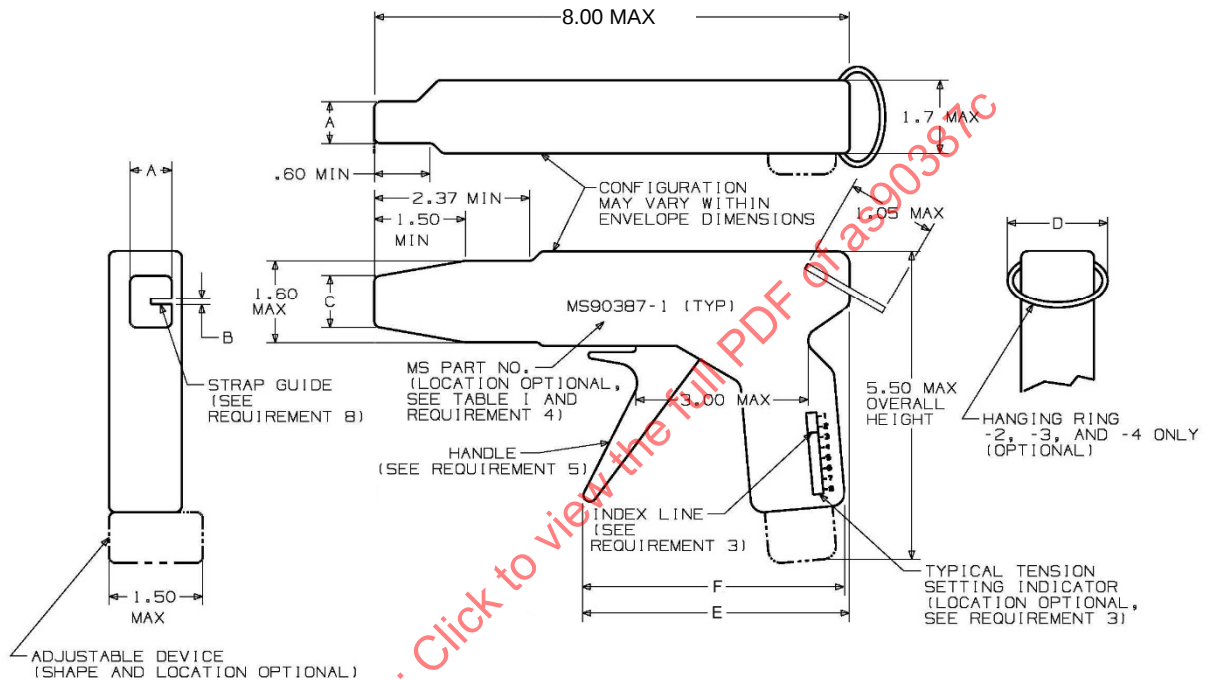


FIGURE 1 - MS90387 TOOL DIMENSIONS AND CONFIGURATION (SEE DESIGN REQUIREMENTS)

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS90387C>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C2

PROCUREMENT SPECIFICATION: AS81306



AEROSPACE STANDARD
WIRING INSTALLATION TOOLS
FOR PLASTIC AND METAL TIEDOWN STRAPS

AS90387
SHEET 1 OF 4

**REV.
C**

Copyright 2014 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2009-12 REVISED 2014-10

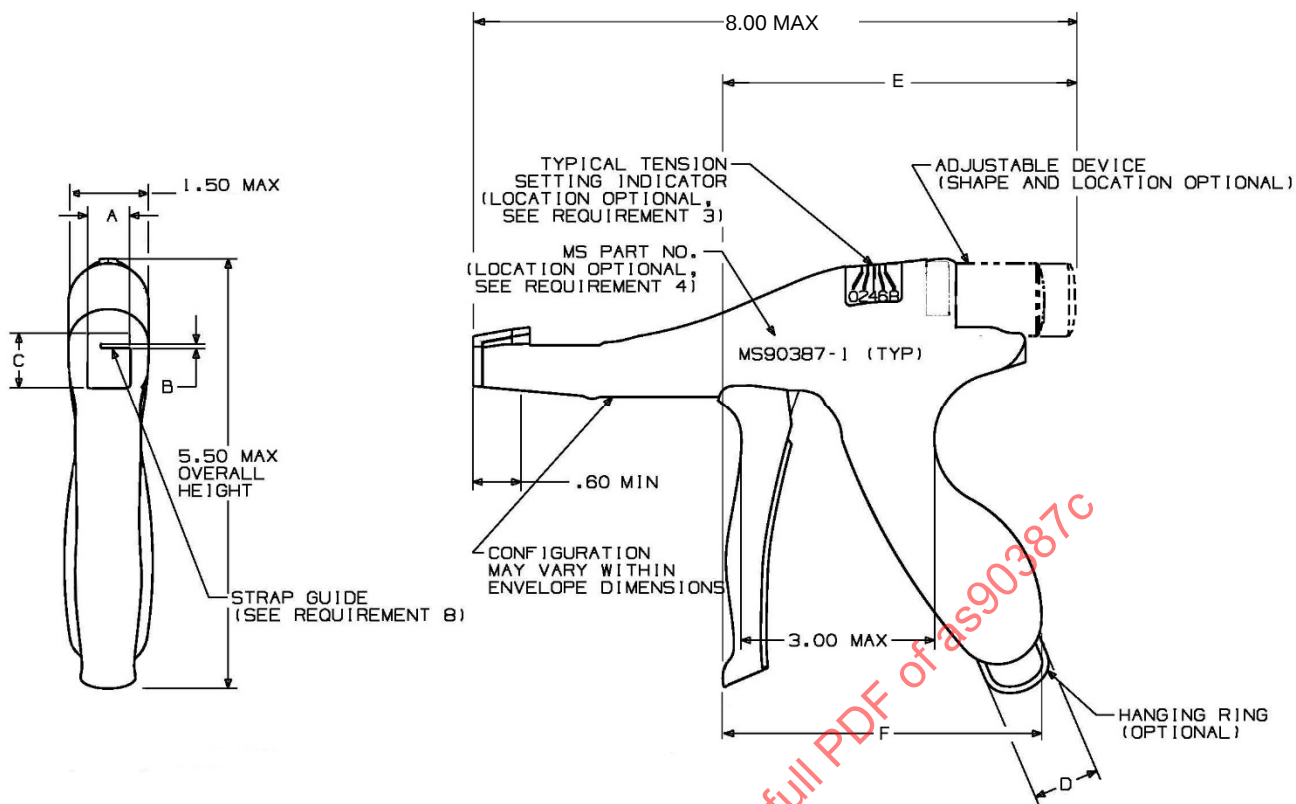


FIGURE 2 - MS90387 OPTIONAL TOOL DIMENSIONS AND CONFIGURATION (SEE DESIGN REQUIREMENTS)

TABLE 1 - FIGURE 1 AND 2 DIMENSIONS (ALL UNITS ARE IN INCHES)

MS PART NO	TIE MATERIAL	FIGURE	A MAX	B MIN	B MAX	C MAX	D MAX ^{1/}	E MAX	F MAX	INSTRUCTION FIELD COLOR
MS90387-1	PLASTIC	1 OR 2	.65	.055	.065	1.00	N/A	4.63	4.30	BLACK
MS90387-2	PLASTIC	1 OR 2	.85	.083	.090	1.34	1.20	4.63	4.30	RED
MS90387-3	METAL	1	1.16	.015	.045	1.48	1.20	4.63	4.05	BLACK
MS90387-4	PLASTIC	1	.85	.095	.105	1.34	1.20	4.63	4.05	BLUE
MS90387-5	PLASTIC	1 OR 2	.65	.055	.065	1.00	N/A	4.30	3.60	MAROON

^{1/} N/A – NOT APPLICABLE

TABLE 2 - TOOL AND TIEDOWN STRAP CROSS-REFERENCE

TOOL		TIEDOWN STRAP SIZES			
MS PART NO.	TENSION SETTING RANGE (SEE APPLICATION NOTE 1)	TIE MATERIAL	MS PART NOS.	STRAP IDENTIFICATION CODE	STRAP MIN TENSILE, LB (REFERENCE)
MS90387-1 MS90387-5 (SEE APPLICATION NOTE 1)	1-3	PLASTIC	MS3367-4,-26,-30,-31,-32 MS3368-5	MIN (MINIATURE)	18
	3-5		MS3367-5,-27,-33,-34,-35	INT (INTERMEDIATE)	30
	6-8		MS3367-1,-2,-7,-23,-24, -29,-36,-37,-38,-39 MS3368-1,-2,-3,-4	STD (STANDARD)	50
MS90387-2	1-4	PLASTIC	MS3367-1,-2,-7,-23,-24, -29,-36,-37,-38,-39 MS3368-1,-2,-3,-4	STD (STANDARD)	50
	5-8		MS3367-3,-6,-8 TO -18, -25,-28,-40,-41	HVY (HEAVY)	120
MS90387-3	1-4	METAL	M23190/3-1 TO /3-4	STD (STANDARD)	100
	5-8		M23190/3-5 TO /3-9	HVY (HEAVY)	250
MS90387-4	1-4	PLASTIC	MS3367-3,-6,-8, -18 TO -25,-28,-40,-41	HVY (HEAVY)	120
	5-8		MS3367-19 TO -22	EH (EXTRA HEAVY)	250

REQUIREMENTS AS SPECIFIED IN AS81306

1. FINISH: SEE AS81306.
2. TOOLS SHALL HAVE NO BURRS, SHARP EDGES, OR SHARP CORNERS.
3. THE INDEX LINE AND EIGHT TENSION STATION LINES SHALL BE CLEAR AND DISTINGUISHABLE. INCREASING STATION LINE NUMBERS SHALL REPRESENT INCREASING TENSION LOAD (SEE NOTE 1).
4. INSTRUCTIONS AND PART NUMBERS SHALL HAVE WHITE OR SILVER LETTERING ON A FIELD COLORED AS SPECIFIED IN TABLE 1 AND SHALL BE SECURELY ATTACHED TO THE TOOL. TENSION SETTING RANGES CORRELATED TO THE STRAP IDENTIFICATION CODES SPECIFIED IN TABLE 2 SHALL BE INDICATED ON THE TOOL (SEE NOTE 2).
5. THE HANDLE SHALL BE SPRING RETURNED, SHALL FACILITATE GRASPING, AND SHALL BE COLORED SAME AS THE INSTRUCTIONS FIELD.
6. THE TOOL TENSION SETTING SHALL NOT CHANGE DURING CONSECUTIVE OPERATIONS.
7. THE TOOL SHALL TENSION AND AUTOMATICALLY SEVER THE STRAP WITHOUT DETRIMENT TO STRAP PERFORMANCE AS SPECIFIED BY AS23190. THE TOOL SHALL BE DESIGNED TO CUT THE STRAP PARALLEL WITH THE STRAP HEAD.
8. THE ENTRY EDGE(S) OF THE STRAP SHALL PERMIT EASY ENTRY OF THE STRAP.

	AEROSPACE STANDARD	AS90387 SHEET 3 OF 4	REV. C
	WIRING INSTALLATION TOOLS FOR PLASTIC AND METAL TIEDOWN STRAPS		