

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS91101™

RATIONALE

UPDATE TO ASME Y14.5-2018. DELETE RUNOUT REQUIREMENT ON SHANK TO DATUM M AND ADD POSITION TOLERANCE ON MAJOR DIA (ADD DATUM U ON BEARING FACE) PER AS1132. REVISE LEAD THREAD CHAMFER TO AS1132. REVISE LIGHTENING HOLE CONFIGURATION TO AS1132. NOTE 1 - ADD "COMPOSITION SIMILAR TO" TO UNS.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9110, NOTICE 1. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

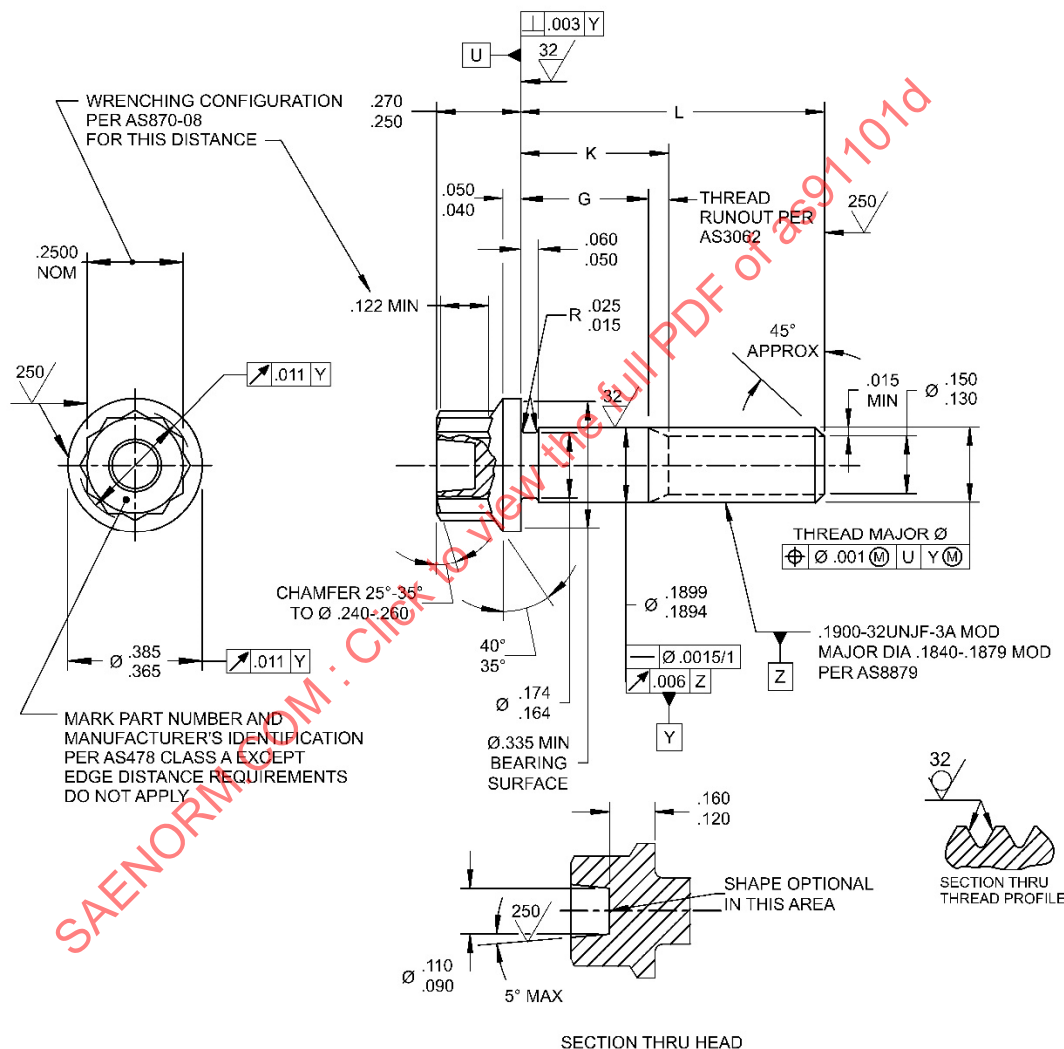


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS91101D/>

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7477



AEROSPACE STANDARD

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED
WASHER HEAD, CLOSE TOLERANCE SHANK,
UNS S66286, 130 KSI MIN, .1900-32 UNJF-3A

AS91101™
SHEET 1 OF 2

REV.
D