

ADOPTION NOTICE

SAE-AS9902, "PLUG, MACHINE THREAD DRILLED, PREFORMED PACKING MIL-S-8879 THREAD", was adopted on 27-OCT-99 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

Custodians:

Navy - AS
Air Force - 11
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of SAE-AS9902

FSC 5365

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9202

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5330

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9202A (ASG), NOTICE 1, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9202A (ASG), NOTICE 1, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY MATERIAL RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as9202

THIRD ANGLE PROJECTION



ISSUED 1998-05

PREPARED BY COMMITTEE E-25

PROCUREMENT SPECIFICATION: AS7325

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

GASKET - METAL O-RING,
.062 TUBE X .010 WALL, CRES

AS9202
SHEET 1 OF 4

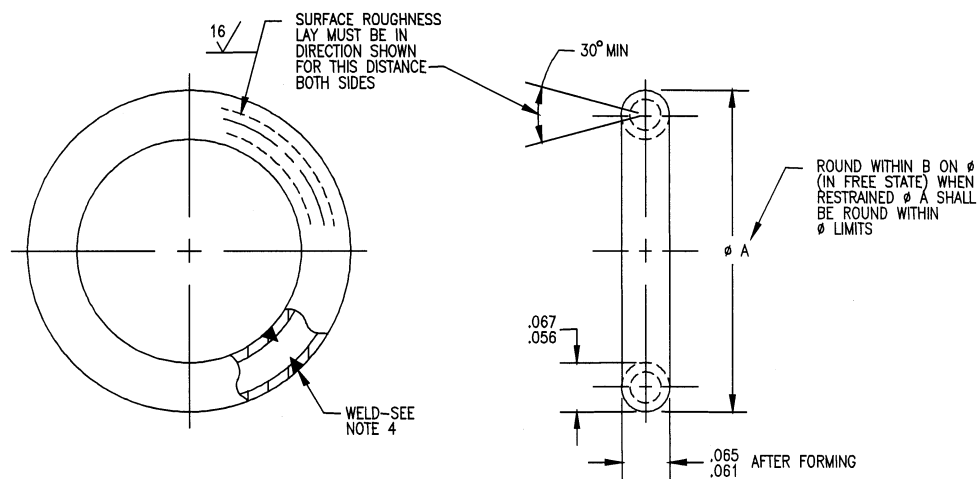


FIGURE 1

TABLE 1 - DIMENSIONS

PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100
*MS9202-013	.438	.030	.061	*MS9202-031	1.000	.030	.140
MS9202-014	.469	.030	.066	MS9202-032	1.031	.030	.144
*MS9202-015	.500	.030	.070	MS9202-033	1.062	.030	.149
MS9202-016	.531	.030	.074	MS9202-034	1.094	.030	.153
*MS9202-017	.562	.030	.079	*MS9202-035	1.125	.030	.157
MS9202-018	.594	.030	.083	MS9202-036	1.156	.030	.162
*MS9202-019	.625	.030	.087	MS9202-037	1.188	.030	.166
MS9202-020	.656	.030	.092	MS9202-038	1.219	.030	.171
*MS9202-021	.688	.030	.096	*MS9202-039	1.250	.030	.175
MS9202-022	.719	.030	.101	MS9202-040	1.312	.030	.184
*MS9202-023	.750	.030	.105	*MS9202-041	1.375	.030	.192
MS9202-024	.781	.030	.109	MS9202-042	1.438	.030	.201
MS9202-025	.812	.030	.114	*MS9202-043	1.500	.030	.210
MS9202-026	.844	.030	.118	MS9202-044	1.562	.030	.219
*MS9202-027	.875	.030	.122	*MS9202-045	1.625	.030	.227
MS9202-028	.906	.030	.127	MS9202-046	1.688	.030	.236
MS9202-029	.938	.030	.131	*MS9202-047	1.750	.030	.245
MS9202-030	.969	.030	.136	MS9202-048	1.812	.030	.254

AS9202

TABLE 1 (CONTINUED)

PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100	PART NO.	A +.005 -.000	B	APPROX WEIGHT LB/100
MS9202-049	1.875	.030	.262	*MS9202-091	4.500	.060	.630
MS9202-050	1.938	.030	.271	MS9202-093	4.625	.060	.647
*MS9202-051	2.000	.030	.280	MS9202-095	4.750	.060	.665
MS9202-052	2.062	.030	.289	MS9202-097	4.875	.060	.682
MS9202-053	2.125	.030	.297	*MS9202-099	5.000	.060	.700
MS9202-054	2.188	.030	.306	MS9202-101	5.125	.090	.717
*MS9202-055	2.250	.030	.315	MS9202-103	5.250	.090	.735
MS9202-056	2.312	.030	.324	MS9202-105	5.375	.090	.752
MS9202-057	2.375	.030	.332	MS9202-107	5.500	.090	.770
MS9202-058	2.438	.030	.341	MS9202-109	5.625	.090	.787
*MS9202-059	2.500	.030	.350	MS9202-111	5.750	.090	.805
MS9202-060	2.562	.060	.359	MS9202-113	5.875	.090	.822
MS9202-061	2.625	.060	.367	*MS9202-115	6.000	.090	.840
MS9202-062	2.688	.060	.376	MS9202-117	6.125	.090	.857
*MS9202-063	2.750	.060	.385	MS9202-119	6.250	.090	.875
MS9202-064	2.812	.060	.394	MS9202-121	6.375	.090	.892
MS9202-065	2.875	.060	.402	MS9202-123	6.500	.090	.910
MS9202-066	2.938	.060	.411	MS9202-125	6.625	.090	.927
*MS9202-067	3.000	.060	.420	MS9202-127	6.750	.090	.945
MS9202-069	3.125	.060	.437	MS9202-129	6.875	.090	.962
MS9202-071	3.250	.060	.455	*MS9202-131	7.000	.090	.980
MS9202-073	3.375	.060	.472	MS9202-133	7.125	.090	.997
*MS9202-075	3.500	.060	.490	MS9202-135	7.250	.090	1.015
MS9202-077	3.625	.060	.507	MS9202-137	7.375	.090	1.032
MS9202-079	3.750	.060	.525	MS9202-139	7.500	.090	1.050
MS9202-081	3.875	.060	.542	MS9202-141	7.625	.090	1.067
*MS9202-083	4.000	.060	.560	MS9202-143	7.750	.090	1.085
MS9202-085	4.125	.060	.577	MS9202-145	7.875	.090	1.102
MS9202-087	4.250	.060	.595	*MS9202-147	8.000	.090	1.120
MS9202-089	4.375	.060	.612				

NOTES:

1. RING SHALL BE FLAT WITHIN B.
2. *PREFERRED SIZES.
3. MATERIAL: CORROSION AND HEAT RESISTANT STEEL TUBING AMS 5570 OR AMS 5576. TUBE SIZE .061 - .064 DIA, WALL THICKNESS .009 - .011.
4. FINISH WELD FLUSH WITH TUBE OD. SMOOTH BLEND WITHIN .125 OF WELD. DIMENSIONS AT BLEND SHALL NOT BE MORE THAN .004 BELOW ADJACENT SURFACES.
5. MANUFACTURING SPECIFICATION: AS7325.
6. SURFACE ROUGHNESS: AS291.