


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5330	
	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9202A(ASG), NOTICE 1, AMENDMENT 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.	
AS9202	SAENORM.COM : Click to view the full PDF of as9202a	
THIRD ANGLE PROJECTION 		ISSUED 1998-05 REVISED 2001-07
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS		
	AEROSPACE STANDARD (R) GASKET - METAL O-RING, .062 TUBE X .010 WALL, CRES - UNS S32100	AS9202 SHEET 1 OF 4
		REV. A

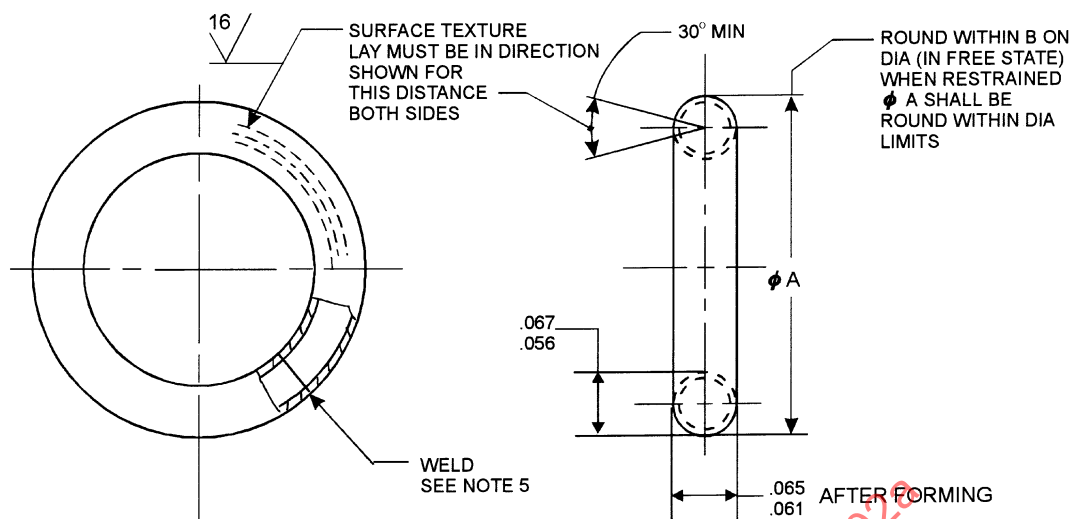


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
* MS9202-013	.438	.030	.061	* MS9202-031	1.000	.030	.140
MS9202-014	.469	.030	.066	MS9202-032	1.031	.030	.144
* MS9202-015	.500	.030	.070	MS9202-033	1.062	.030	.149
MS9202-016	.531	.030	.074	MS9202-034	1.094	.030	.153
* MS9202-017	.562	.030	.079	* MS9202-035	1.125	.030	.157
MS9202-018	.594	.030	.083	MS9202-036	1.156	.030	.162
* MS9202-019	.625	.030	.087	MS9202-037	1.188	.030	.166
MS9202-020	.656	.030	.092	MS9202-038	1.219	.030	.171
* MS9202-021	.688	.030	.096	* MS9202-039	1.250	.030	.175
MS9202-022	.719	.030	.101	MS9202-040	1.312	.030	.184
* MS9202-023	.750	.030	.105	* MS9202-041	1.375	.030	.192
MS9202-024	.781	.030	.109	MS9202-042	1.438	.030	.201
MS9202-025	.812	.030	.114				
MS9202-026	.844	.030	.118				
* MS9202-027	.875	.030	.122				
MS9202-028	.906	.030	.127				
MS9202-029	.938	.030	.131				
MS9202-030	.969	.030	.136				

REV.
A

AS9202

TABLE 1 - PART NUMBERS AND DIMENSIONS (CONTINUED)

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
* MS9202-043	1.500	.030	.210	MS9202-085	4.125	.060	.577
MS9202-044	1.562	.030	.219	MS9202-087	4.250	.060	.595
* MS9202-045	1.625	.030	.227	MS9202-089	4.375	.060	.612
MS9202-046	1.688	.030	.236	* MS9202-091	4.500	.060	.630
* MS9202-047	1.750	.030	.245	MS9202-093	4.625	.060	.647
MS9202-048	1.812	.030	.254	MS9202-095	4.750	.060	.665
MS9202-049	1.875	.030	.262	MS9202-097	4.875	.060	.682
MS9202-050	1.938	.030	.271	* MS9202-099	5.000	.060	.700
* MS9202-051	2.000	.030	.280	MS9202-101	5.125	.090	.717
MS9202-052	2.062	.030	.289	MS9202-103	5.250	.090	.735
MS9202-053	2.125	.030	.297	MS9202-105	5.375	.090	.752
MS9202-054	2.188	.030	.306	MS9202-107	5.500	.090	.770
* MS9202-055	2.250	.030	.315	MS9202-109	5.625	.090	.787
MS9202-056	2.312	.030	.324	MS9202-111	5.750	.090	.805
MS9202-057	2.375	.030	.332	MS9202-113	5.875	.090	.822
MS9202-058	2.438	.030	.341	* MS9202-115	6.000	.090	.840
* MS9202-059	2.500	.030	.350	MS9202-117	6.125	.090	.857
MS9202-060	2.562	.060	.359	MS9202-119	6.250	.090	.875
MS9202-061	2.625	.060	.367	MS9202-121	6.375	.090	.892
MS9202-062	2.688	.060	.376	MS9202-123	6.500	.090	.910
* MS9202-063	2.750	.060	.385	MS9202-125	6.625	.090	.927
MS9202-064	2.812	.060	.394	* MS9202-127	6.750	.090	.945
MS9202-065	2.875	.060	.402	MS9202-129	6.875	.090	.962
MS9202-066	2.938	.060	.411	* MS9202-131	7.000	.090	.980
* MS9202-067	3.000	.060	.420	MS9202-133	7.125	.090	.997
MS9202-069	3.125	.060	.437	MS9202-135	7.250	.090	1.015
MS9202-071	3.250	.060	.455	MS9202-137	7.375	.090	1.032
MS9202-073	3.375	.060	.472	MS9202-139	7.500	.090	1.050
* MS9202-075	3.500	.060	.490	MS9202-141	7.625	.090	1.067
MS9202-077	3.625	.060	.507	MS9202-143	7.750	.090	1.085
MS9202-079	3.750	.060	.525	MS9202-145	7.875	.090	1.102
MS9202-081	3.875	.060	.542	* MS9202-147	8.000	.090	1.120
* MS9202-083	4.000	.060	.560				

AEROSPACE STANDARD

(R)

GASKET - METAL O-RING,
.062 TUBE X .010 WALL, CRES -
UNS S32100

AS9202
SHEET 3 OF 4

REV.
A