


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C	FEDERAL SUPPLY CLASS 5306	
	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
AS9208	SAENORM.COM : Click to view the full PDF of as9208c	
CUSTODIAN: E-25		THIRD ANGLE PROJECTION 
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS9208C		
	AEROSPACE STANDARD BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, UNS K14675, 195 KSI MIN, .1900-32 UNJF-3A	AS9208
		REV. C

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9208, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

WARNING

THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON APPLICABLE HEALTH AND ENVIRONMENTAL REGULATIONS REGARDING ITS USE.

SAENORM.COM : Click to view the full PDF of as9208c

	AEROSPACE STANDARD	AS9208 SHEET 1 OF 4	REV. C
	BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, UNS K14675, 195 KSI MIN, .1900-32 UNJF-3A		

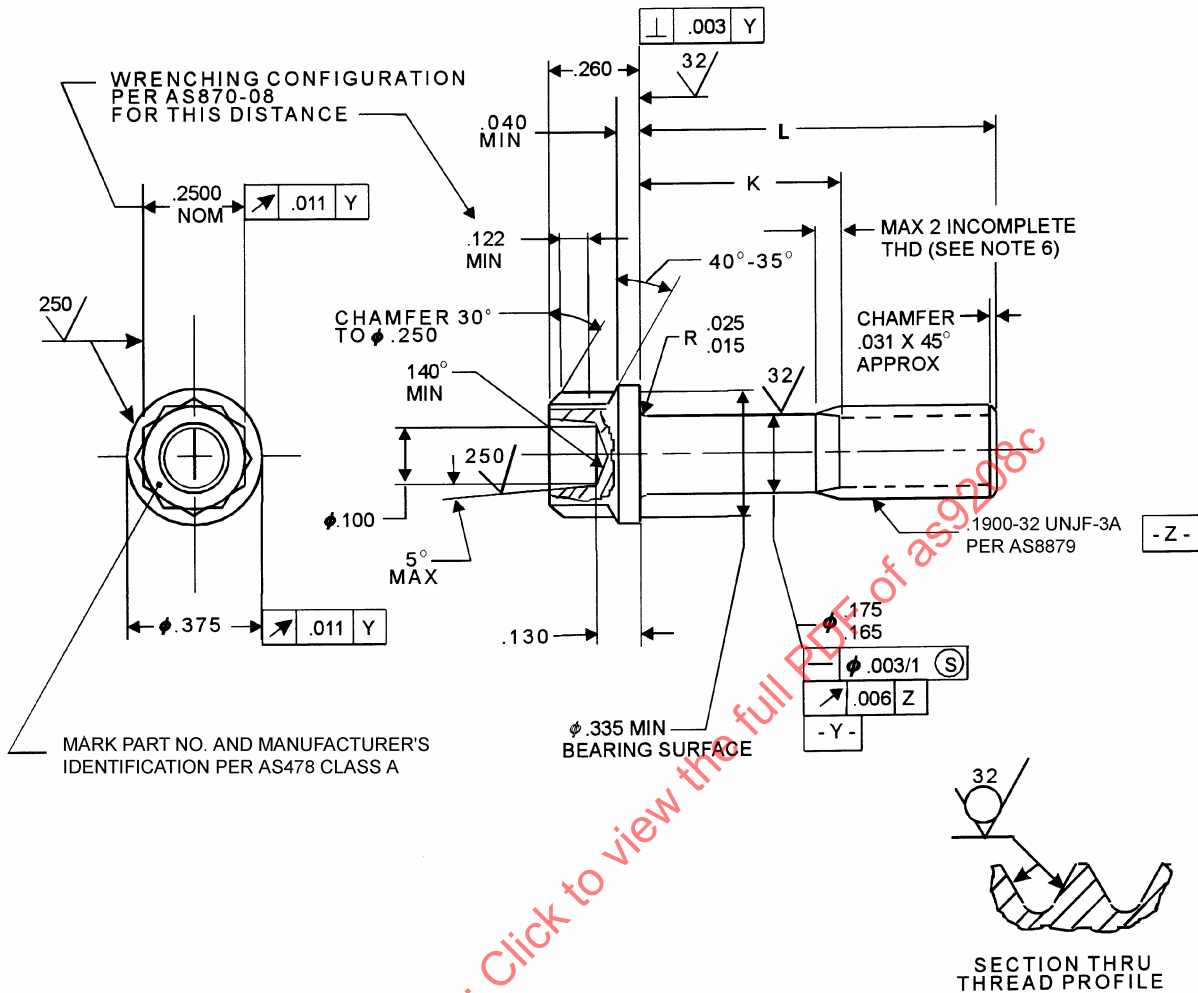


FIGURE 1 - BOLT

	AEROSPACE STANDARD	AS9208 SHEET 2 OF 4	REV. C
	BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, UNS K14675, 195 KSI MIN, .1900-32 UNJF-3A		

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9208-04	.375	.072 - .092	.91	MS9208-22	1.500	.810 - .870	1.63
MS9208-05	.438	.072 - .092	.95	MS9208-23	1.562	.872 - .932	1.67
MS9208-06	.500	.072 - .092	.99	MS9208-24	1.625	.935 - .995	1.71
MS9208-07	.562	.072 - .092	1.03	MS9208-25	1.688	.998 - 1.058	1.75
MS9208-08	.625	.072 - .092	1.07	MS9208-26	1.750	1.060 - 1.120	1.79
MS9208-09	.688	.072 - .092	1.11	MS9208-27	1.875	1.185 - 1.245	1.87
MS9208-10	.750	.072 - .099	1.15	MS9208-28	2.000	1.310 - 1.370	1.95
MS9208-11	.812	.122 - .182	1.19	MS9208-29	2.125	1.435 - 1.495	2.03
MS9208-12	.875	.185 - .245	1.23	MS9208-30	2.250	1.560 - 1.620	2.11
MS9208-13	.938	.248 - .308	1.27	MS9208-31	2.375	1.685 - 1.745	2.19
MS9208-14	1.000	.310 - .370	1.31	MS9208-32	2.500	1.810 - 1.870	2.27
MS9208-15	1.062	.372 - .432	1.35	MS9208-33	2.625	1.935 - 1.995	2.35
MS9208-16	1.125	.435 - .495	1.39	MS9208-34	2.750	2.060 - 2.120	2.43
MS9208-17	1.188	.498 - .558	1.43	MS9208-35	2.875	2.185 - 2.245	2.51
MS9208-18	1.250	.560 - .620	1.47	MS9208-36	3.000	2.310 - 2.370	2.59
MS9208-19	1.312	.622 - .682	1.51				
MS9208-20	1.375	.685 - .745	1.55				
MS9208-21	1.438	.748 - .808	1.59				

NOTES:

1. MATERIAL: LOW ALLOY STEEL AMS 6304 (UNS K14675).
2. PROCUREMENT SPECIFICATION: AS7459.
3. HARDNESS: 42-46 HRC.
4. FINISH: DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
5. MAGNETIC PARTICLE INSPECTION PER ASTM E 1444 BEFORE PLATING.
6. INCOMPLETE THREADS NOT TO ENTER FILLET.
7. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra EXCEPT UPSET HEAD.
8. BREAK SHARP EDGES .003-.015, UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982 (ASME PUBLICATION).
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS $\pm .010$, ANGULAR DIMENSIONS $\pm 5^\circ$.
11. DO NOT USE UNASSIGNED PART NUMBERS.

	AEROSPACE STANDARD	AS9208 SHEET 3 OF 4	REV. C
	BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, UNS K14675, 195 KSI MIN, .1900-32 UNJF-3A		