


REV. B		FEDERAL SUPPLY CLASS 5306	
AS9218	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9218, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT. WARNING THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON APPLICABLE HEALTH AND ENVIRONMENTAL REGULATIONS REGARDING ITS USE.		
	SAENORM.COM : Click to view the full PDF of as9218b		
	CUSTODIAN: SAE E-25		
	AEROSPACE STANDARD		AS9218 SHEET 1 OF 4
			REV. B
	BOLT, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, UNS K14675, 195 KSI MIN, .2500-28 UNJF-3A		THIRD ANGLE PROJECTION 

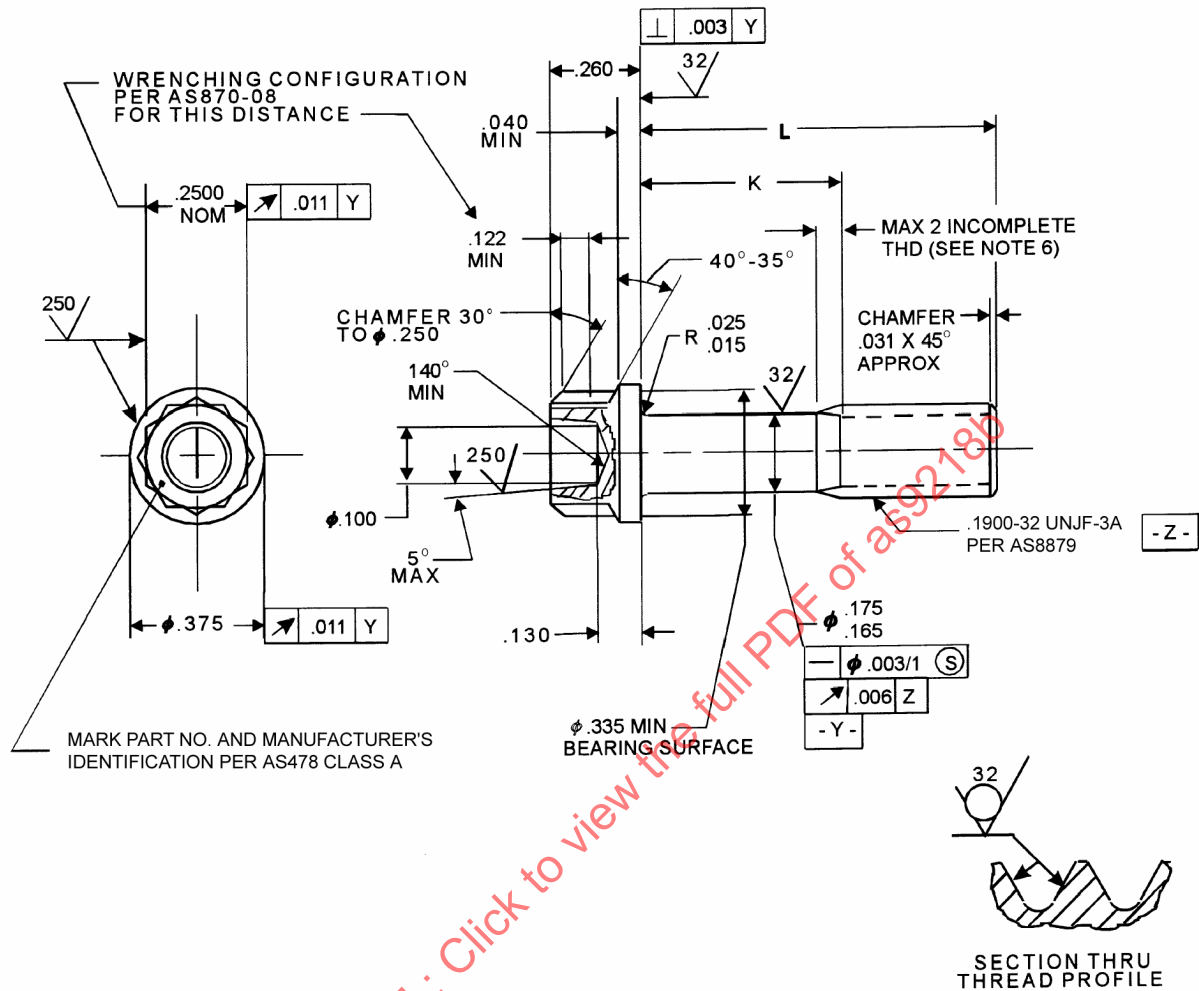


TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9218-04	.375	.079 - .099	1.14	MS9218-34	2.750	1.940 - 2.000	3.85
MS9218-05	.438	.079 - .099	1.21	MS9218-35	2.875	2.065 - 2.125	4.00
MS9218-06	.500	.079 - .099	1.29	MS9218-36	3.000	2.190 - 2.250	4.14
MS9218-07	.562	.079 - .099	1.36	MS9218-37	3.125	2.315 - 2.375	4.29
MS9218-08	.625	.079 - .099	1.44	MS9218-38	3.250	2.440 - 2.500	4.43
MS9218-09	.688	.079 - .099	1.51	MS9218-39	3.375	2.565 - 2.625	4.58
MS9218-10	.750	.079 - .099	1.58	MS9218-40	3.500	2.690 - 2.750	4.72
MS9218-11	.812	.079 - .099	1.65	MS9218-41	3.625	2.815 - 2.875	4.85
MS9218-12	.875	.125 - .145	1.72	MS9218-42	3.750	2.940 - 3.000	4.99
MS9218-13	.938	.128 - .188	1.79	MS9218-43	3.875	3.065 - 3.125	5.13
MS9218-14	1.000	.190 - .250	1.86	MS9218-44	4.000	3.190 - 3.250	5.27
MS9218-15	1.062	.252 - .312	1.93	MS9218-45	4.125	3.315 - 3.375	5.42
MS9218-16	1.125	.315 - .375	2.00	MS9218-46	4.250	3.440 - 3.500	5.56
MS9218-17	1.188	.378 - .438	2.08	MS9218-47	4.375	3.565 - 3.625	5.71
MS9218-18	1.250	.440 - .500	2.15	MS9218-48	4.500	3.690 - 3.750	5.85
MS9218-19	1.312	.502 - .562	2.22	MS9218-49	4.625	3.815 - 3.875	6.00
MS9218-20	1.375	.565 - .625	2.29	MS9218-50	4.750	3.940 - 4.000	6.14
MS9218-21	1.438	.628 - .688	2.36	MS9218-51	4.875	4.065 - 4.125	6.29
MS9218-22	1.500	.690 - .750	2.43	MS9218-52	5.000	4.190 - 4.250	6.43
MS9218-23	1.562	.752 - .812	2.50	MS9218-53	5.125	4.315 - 4.375	6.56
MS9218-24	1.625	.815 - .875	2.57	MS9218-54	5.250	4.440 - 4.500	6.70
MS9218-25	1.688	.878 - .938	2.64	MS9218-55	5.375	4.565 - 4.625	6.84
MS9218-26	1.750	.940 - 1.000	2.72	MS9218-56	5.500	4.690 - 4.750	6.99
MS9218-27	1.875	1.065 - 1.125	2.86	MS9218-57	5.625	4.815 - 4.875	7.13
MS9218-28	2.000	1.190 - 1.250	3.00	MS9218-58	5.750	4.940 - 5.000	7.28
MS9218-29	2.125	1.315 - 1.375	3.14	MS9218-59	5.875	5.065 - 5.125	7.42
MS9218-30	2.250	1.440 - 1.500	3.29	MS9218-60	6.000	5.190 - 5.250	7.57
MS9218-31	2.375	1.565 - 1.625	3.43				
MS9218-32	2.500	1.690 - 1.750	3.57				
MS9218-33	2.625	1.815 - 1.875	3.71				