

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS9360

FEDERAL SUPPLY CLASS
5310

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9360B, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.


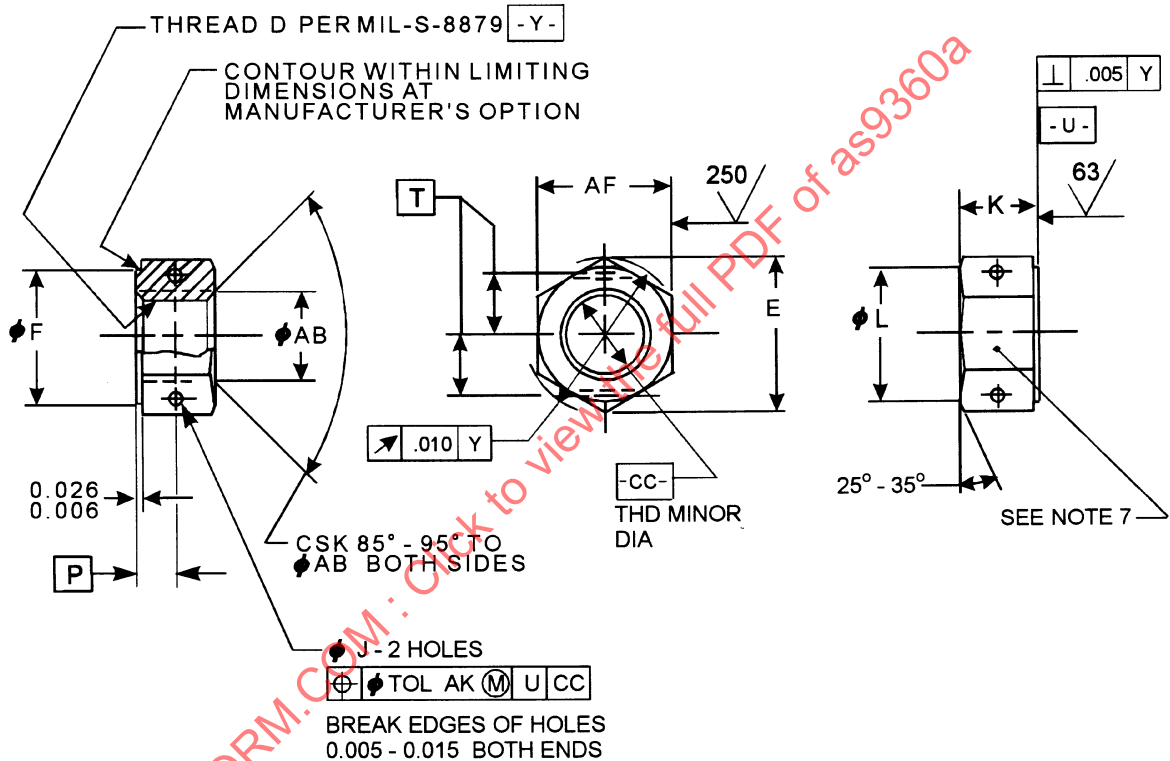


FIGURE 1 - NUT

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

(R)

AEROSPACE STANDARD

NUT, PLAIN, HEXAGON - DRILLED,
SILVER PLATED - UNS S66286,
130 KSI MIN

AS9360
SHEET 1 OF 3

REV.
A

REV.
A

AS9360

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	D NOMINAL THREAD UNJF-3B	AF	E MIN	F MIN	AB	K	L MIN
MS9360-04	.1120-48	0.243 - 0.251	0.268	0.240	0.112 - 0.132	0.126 - 0.146	0.240
MS9360-05	.1380-40	0.305 - 0.313	0.339	0.302	0.138 - 0.158	0.126 - 0.146	0.302
MS9360-08	.1640-36	0.336 - 0.345	0.375	0.334	0.164 - 0.194	0.126 - 0.146	0.334
MS9360-09	.1900-32	0.367 - 0.376	0.410	0.365	0.190 - 0.220	0.146 - 0.166	0.365
MS9360-10	.2500-28	0.429 - 0.439	0.481	0.428	0.250 - 0.280	0.209 - 0.229	0.428
MS9360-11	.3125-24	0.492 - 0.502	0.552	0.490	0.312 - 0.342	0.256 - 0.276	0.490
MS9360-12	.3750-24	0.553 - 0.564	0.623	0.552	0.375 - 0.405	0.318 - 0.338	0.552
MS9360-13	.4375-20	0.679 - 0.690	0.765	0.678	0.438 - 0.468	0.365 - 0.385	0.678
MS9360-14	.5000-20	0.741 - 0.752	0.836	0.740	0.500 - 0.535	0.428 - 0.448	0.740
MS9360-15	.5625-18	0.865 - 0.877	0.978	0.865	0.562 - 0.597	0.474 - 0.494	0.865
MS9360-16	.6250-18	0.928 - 0.940	1.049	0.928	0.625 - 0.660	0.537 - 0.557	0.928
MS9360-17	.7500-16	1.052 - 1.064	1.192	1.052	0.750 - 0.785	0.646 - 0.666	1.052
MS9360-18	.8750-14	1.239 - 1.252	1.405	1.239	0.875 - 0.910	0.756 - 0.776	1.240
MS9360-19	1.0000-12	1.427 - 1.440	1.619	1.427	1.000 - 1.035	0.865 - 0.885	1.428

TABLE 1 - PART NUMBERS AND DIMENSIONS - CONTINUED

PART NUMBER	J	P	T	AK	APPROX. MASS LB/100
MS9360-04	0.027 - 0.035	0.068	0.090	0.005	0.17
MS9360-06	0.043 - 0.051	0.068	0.115	0.005	0.27
MS9360-08	0.043 - 0.051	0.068	0.135	0.005	0.32
MS9360-09	0.043 - 0.051	0.078	0.150	0.005	0.37
MS9360-10	0.043 - 0.051	0.110	0.185	0.005	0.75
MS9360-11	0.043 - 0.051	0.133	0.215	0.005	1.11
MS9360-12	0.043 - 0.051	0.164	0.245	0.010	1.63
MS9360-13	0.066 - 0.074	0.187	0.300	0.010	2.93
MS9360-14	0.066 - 0.074	0.219	0.335	0.010	3.84
MS9360-15	0.066 - 0.074	0.362	0.385	0.010	6.04
MS9360-16	0.066 - 0.074	0.400	0.420	0.010	7.50
MS9360-17	0.066 - 0.074	0.485	0.490	0.010	10.69
MS9360-18	0.066 - 0.074	0.570	0.555	0.010	17.50
MS9360-19	0.066 - 0.074	0.655	0.655	0.010	26.78

AEROSPACE STANDARD

(R)

NUT, PLAIN, HEXAGON - DRILLED,
SILVER PLATED - UNS S66286,
130 KSI MIN

AS9360
SHEET 2 OF 3

REV.
A