

ADOPTION NOTICE

SAE-AS9363, "NUT, SLOTTED, HEXAGON-SHEAR, A-286", was adopted on 23-SEP-98 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

Custodians:

Navy - AS
Air Force - 11
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of as9363

FSC 5310

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9363

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5310

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9363C AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9363C. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

ANY MATERIAL RELATING TO QUALIFIED PRODUCT LISTS HAS NOT BEEN ADOPTED BY SAE. THIS MATERIAL WAS PART OF THE ORIGINAL MILITARY SPECIFICATION AND IS REPRINTED HERE FOR HISTORIC REFERENCE ONLY.

SAENORM.COM : Click to view the full PDF of as9363

THIRD ANGLE PROJECTION



ISSUED 1998-04

PREPARED BY COMMITTEE E-25

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT, SLOTTED, HEXAGON-SHEAR, A-286

AS9363
SHEET 1 OF 3

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE.

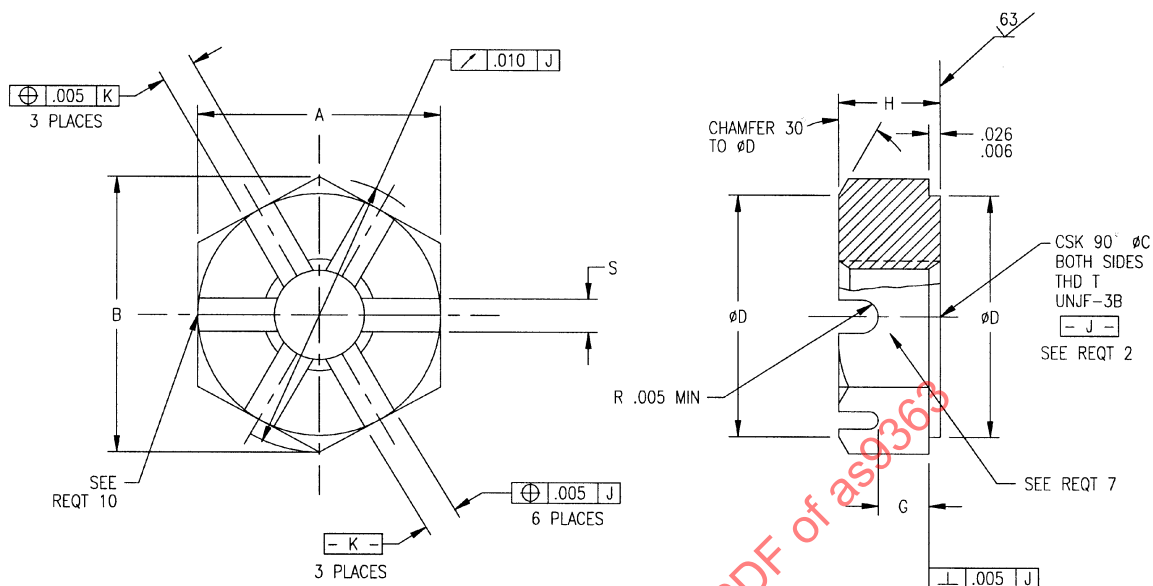


FIGURE 1. NUT

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	THREAD T	A	B MIN	ØC	ØD	G	H	S	APPROX MASS LB/100
-08	.164-36	.336-.345	.383	.164-.184	.334-.354	.068-.088	.146-.166	.073-.088	0.35
-09	.190-32	.367-.376	.419	.190-.210	.365-.385	.084-.104	.178-.198	.073-.088	0.37
-10	.250-28	.430-.439	.491	.250-.270	.428-.448	.084-.104	.178-.198	.073-.088	0.51
-11	.3125-24	.492-.502	.562	.312-.332	.490-.510	.084-.104	.178-.198	.073-.088	0.64
-12	.375-24	.553-.564	.631	.375-.395	.552-.572	.099-.119	.209-.229	.115-.135	0.79
-13	.4375-20	.679-.690	.775	.438-.458	.678-.698	.099-.119	.209-.229	.115-.135	1.59
-14	.500-20	.741-.752	.846	.500-.520	.740-.760	.131-.151	.240-.260	.115-.135	1.95
-15	.5625-18	.865-.877	.987	.562-.582	.865-.885	.178-.198	.302-.322	.146-.166	3.45
-16	.625-18	.928-.940	1.059	.625-.645	.928-.948	.178-.198	.302-.322	.146-.166	3.85
-17	.750-16	1.052-1.064	1.200	.750-.770	1.052-1.072	.240-.260	.365-.385	.146-.166	5.71
-18	.875-14	1.239-1.252	1.414	.875-.895	1.240-1.260	.302-.322	.428-.448	.146-.166	9.57
-19	1.000-12	1.427-1.440	1.628	1.000-1.020	1.428-1.448	.365-.385	.490-.510	.146-.166	14.84