

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

SAE AS9395

RATIONALE

AS9395 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9395A AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9395A. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


ANY MATERIAL RELATING TO QUALIFIED PRODUCT LISTS HAS NOT BEEN ADOPTED BY SAE. THIS MATERIAL WAS PART OF THE ORIGINAL MILITARY SPECIFICATION AND IS REPRINTED HERE FOR HISTORIC REFERENCE ONLY.

FEDERAL SUPPLY CLASS
5340

SAENORM.COM : Click to view the full PDF of as9395

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS9395>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

BACKPLATE, RETAINING STRAP AMS5510

SAE AS9395
SHEET 1 OF 3

ISSUED 1998-02 REAFFIRMED 2012-11

Copyright 2012 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE.

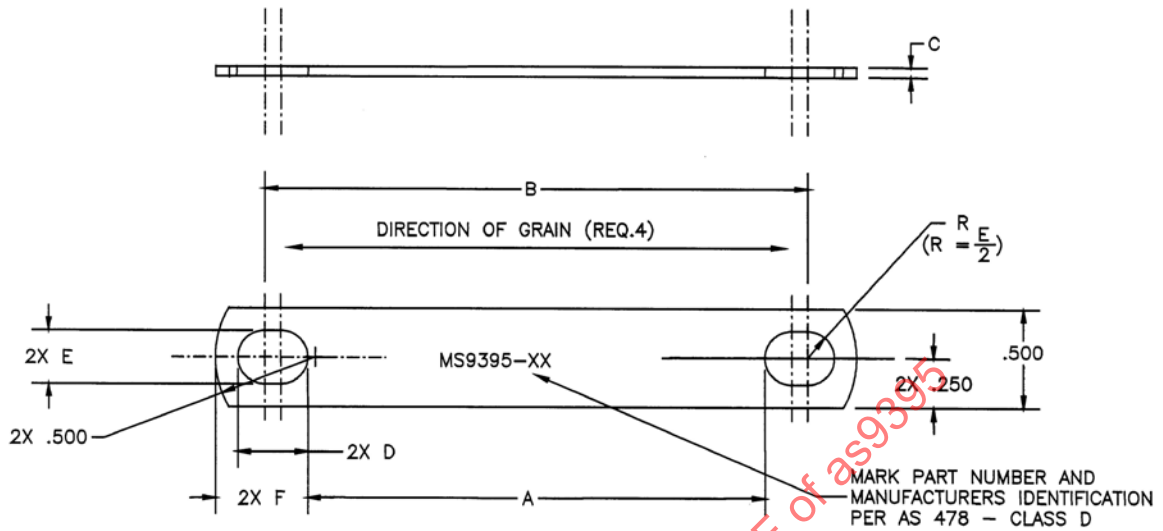


TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	NOM TUBE SIZE	NO. OF TUBES	A ±.010	B REF	C ±.005	D	E	F	APPROX WEIGHT LB/100
MS9395-01	.438	2	1.635	1.996	.032	.278-.286	.200-.210	.430	.88
MS9395-02	.438	3	2.166	2.527	.032	.278-.288	.200-.210	.430	1.21
MS9395-03	.500	2	1.853	2.214	.032	.278-.288	.200-.210	.430	1.08
MS9395-04	.500	3	2.478	2.839	.032	.278-.288	.200-.210	.430	1.35
MS9395-05	.562	2	1.978	2.339	.032	.278-.288	.200-.210	.430	1.13
MS9395-06	.562	3	2.665	3.026	.032	.278-.288	.200-.210	.430	1.43
MS9395-07	.625	2	2.174	2.599	.050	.340-.350	.260-.270	.462	1.93
MS9395-08	.625	3	2.924	3.349	.050	.340-.350	.260-.270	.462	2.45
MS9395-09	.688	2	2.300	2.725	.050	.340-.350	.260-.270	.462	2.20
MS9395-10	.688	3	3.113	3.538	.050	.340-.350	.260-.270	.462	2.60
MS9395-11	.750	2	2.425	2.850	.050	.340-.350	.260-.270	.462	2.11
MS9395-12	.750	3	3.300	3.725	.050	.340-.350	.260-.270	.462	2.73
MS9395-13	.812	2	2.550	2.975	.050	.340-.350	.260-.270	.462	2.20
MS9395-14	.812	3	3.487	3.912	.050	.340-.350	.260-.270	.462	2.86
MS9395-15	.875	2	2.674	3.099	.050	.340-.350	.260-.270	.462	2.28
MS9395-16	.875	3	3.674	4.099	.050	.340-.350	.260-.270	.462	2.99
MS9395-17	.938	2	2.800	3.225	.050	.340-.350	.260-.270	.462	2.37
MS9395-18	.938	3	3.863	4.288	.050	.340-.350	.260-.270	.462	2.95
MS9395-19	1.000	2	2.925	3.350	.050	.340-.350	.260-.270	.462	2.46
MS9395-20	1.000	3	4.050	4.475	.050	.340-.350	.260-.270	.462	3.26