


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5305	
	RATIONALE THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY. THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9449A. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT. WARNING THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON THE ENVIRONMENTAL AND HEALTH REGULATIONS REGARDING ITS USE.	
AS9449	THIRD ANGLE PROJECTION 	
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS		
	(R) AEROSPACE STANDARD SCREW, MACHINE - STEEL, DIFFUSED NICKEL-CADMIUM PLATED, HEXAGON HEAD UNS K14675, 195 KSI MIN, .1380-40 UNJF-3A	AS9449 SHEET 1 OF 3
		REV. A

SAENORM.COM : Click to view the full PDF of as9449a

REV.
A

AS9449

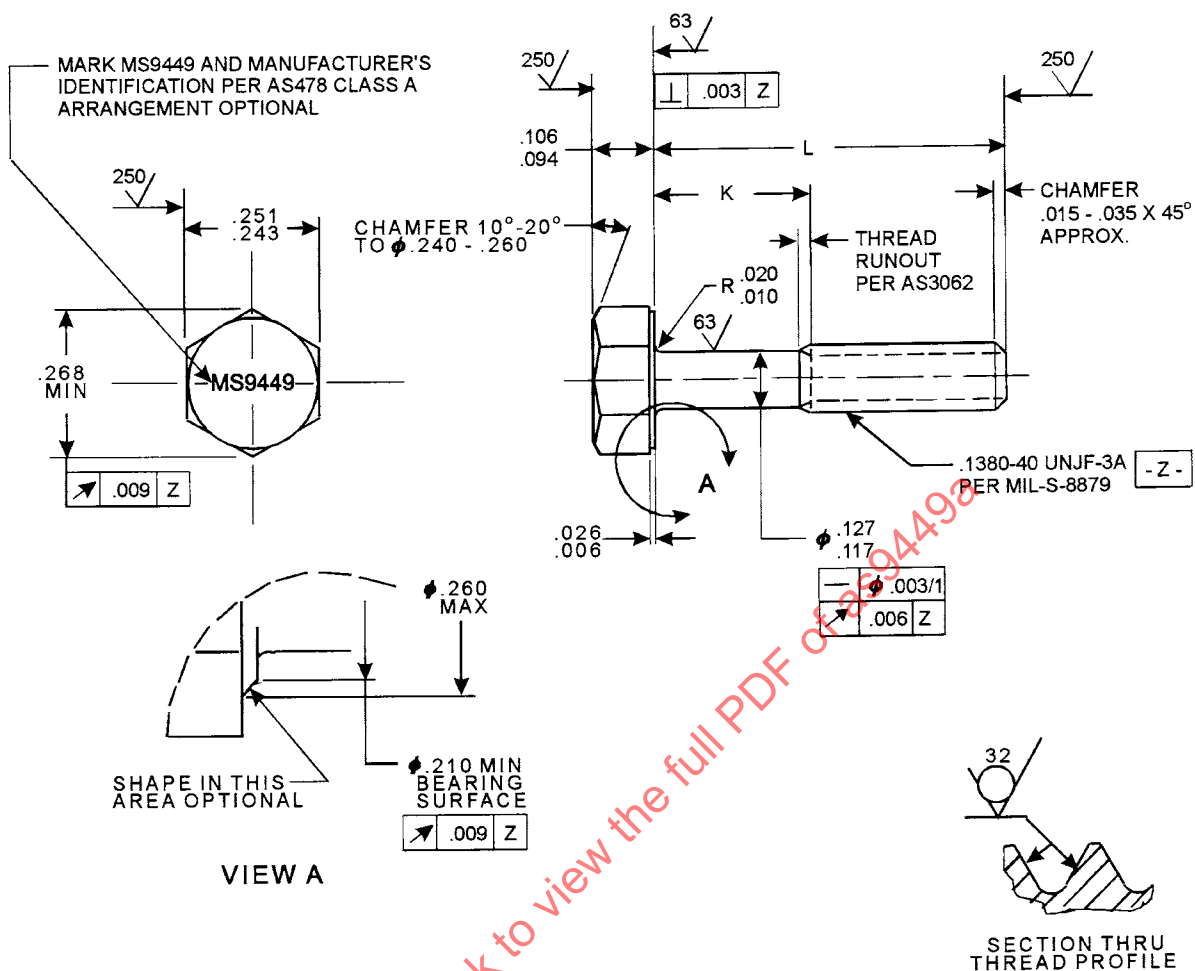


FIGURE 1 - SCREW

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100
MS9449-02	.240 - .260	.058 - .078	.25
MS9449-03	.302 - .322	.058 - .078	.27
MS9449-04	.365 - .385	.058 - .078	.30
MS9449-05	.428 - .448	.058 - .078	.32
MS9449-06	.490 - .510	.058 - .078	.34
MS9449-07	.552 - .572	.058 - .078	.37
MS9449-08	.615 - .635	.058 - .078	.39
MS9449-09	.678 - .698	.102 - .162	.42
MS9449-10	.740 - .760	.164 - .224	.44
MS9449-11	.802 - .822	.226 - .286	.46
MS9449-12	.865 - .885	.289 - .349	.49
MS9449-13	.928 - .948	.353 - .412	.51

PART NO.	L	K	APPROX. MASS LB/100
MS9449-14	.990 - 1.010	.414 - .474	.53
MS9449-15	1.052 - 1.072	.476 - .536	.56
MS9449-16	1.115 - 1.135	.539 - .599	.58
MS9449-17	1.178 - 1.198	.602 - .662	.61
MS9449-18	1.240 - 1.260	.664 - .724	.63
MS9449-19	1.302 - 1.322	.726 - .786	.65
MS9449-20	1.365 - 1.385	.789 - .849	.68
MS9449-21	1.428 - 1.448	.852 - .912	.70
MS9449-22	1.490 - 1.510	.914 - .974	.72