

ADOPTION NOTICE

SAE-AS9458, "BOLT, MACHINE, HEXAGON HEAD, STEEL, .562518 UNJF-3A", was adopted on 23-SEP-98 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

Custodians:

Navy - AS
Air Force - 99
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of SAE-AS9458

FSC 5306

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9458

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5306

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9458B, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9458B, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

SAENORM.COM : Click to view the full PDF of as9458

THIRD ANGLE PROJECTION



ISSUED 1998-08

PREPARED BY COMMITTEE E-25

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BOLT, MACHINE, HEXAGON HEAD, STEEL,
.5625-18 UNJF-3A

AS9458
SHEET 1 OF 3

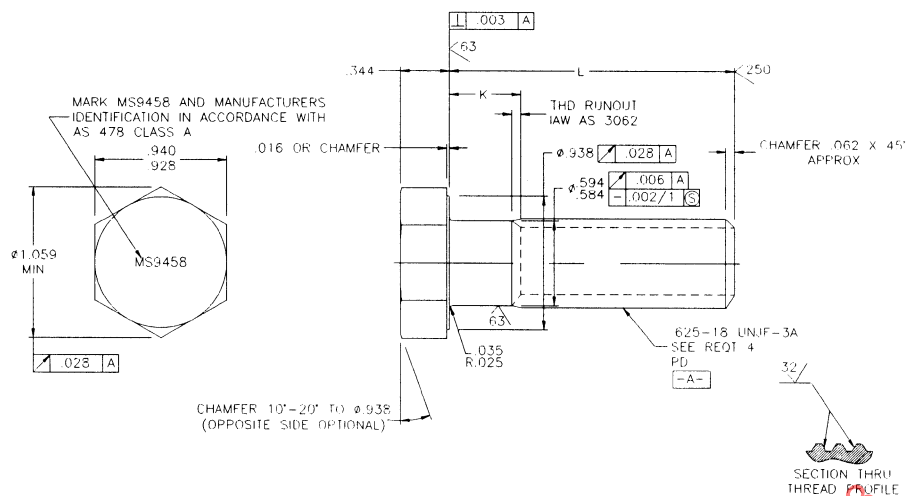


TABLE 1. DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K	APPROX WEIGHT LB/100	DASH NO.	L	K	APPROX WEIGHT LB/100
-03	.938	.114-.134	14.53	-31	3.500	1.940-2.000	34.16
-04	1.000	.114-.134	15.01	-32	3.625	2.065-2.125	35.11
-05	1.062	.114-.134	15.49	-33	3.750	2.190-2.250	36.07
-06	1.125	.114-.134	15.97	-34	3.875	2.315-2.375	37.03
-07	1.188	.114-.134	16.45	-35	4.000	2.440-2.500	37.98
-08	1.250	.114-.134	16.93	-36	4.125	2.565-2.625	38.94
-09	1.312	.114-.134	17.41	-37	4.250	2.690-2.750	39.90
-10	1.375	.114-.134	17.89	-38	4.375	2.815-2.875	40.86
-11	1.438	.114-.134	18.36	-39	4.500	2.940-3.000	41.81
-12	1.500	.114-.134	18.84	-40	4.625	3.065-3.125	42.77
-13	1.562	.114-.134	19.32	-41	4.750	3.190-3.250	43.73
-14	1.625	.125-.145	19.80	-42	4.875	3.315-3.375	44.68
-15	1.688	.128-.188	20.28	-43	5.000	3.440-3.500	45.64
-16	1.750	.190-.250	20.76	-44	5.125	3.565-3.625	46.60
-17	1.812	.252-.312	21.24	-45	5.250	3.690-3.750	47.55
-18	1.875	.315-.375	21.71	-46	5.375	3.815-3.875	48.51
-19	2.000	.440-.500	22.67	-47	5.500	3.940-4.000	49.47
-20	2.125	.565-.625	23.63	-48	5.625	4.065-4.125	50.43
-21	2.250	.690-.750	24.59	-49	5.750	4.190-4.250	51.38
-22	2.375	.815-.875	25.54	-50	5.875	4.315-4.375	52.34
-23	2.500	.940-1.000	26.50	-51	6.000	4.440-4.500	53.30
-24	2.625	1.065-1.125	27.46				
-25	2.750	1.190-1.250	28.41				
-26	2.875	1.315-1.375	29.37				
-27	3.000	1.440-1.500	30.33				
-28	3.125	1.565-1.625	31.28				
-29	3.250	1.690-1.750	32.24				
-30	3.375	1.815-1.875	33.20				