

REV.
A

AS9522

FEDERAL SUPPLY CLASS
5306

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9522C, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

WARNING

THIS DOCUMENT INCLUDES CADMIUM AS A PLATING MATERIAL. THE USE OF CADMIUM HAS BEEN RESTRICTED AND/OR BANNED FOR USE IN MANY COUNTRIES DUE TO ENVIRONMENTAL AND HEALTH CONCERNS. THE USER SHOULD CONSULT WITH LOCAL OFFICIALS ON THE ENVIRONMENTAL AND HEALTH REGULATIONS REGARDING ITS USE.

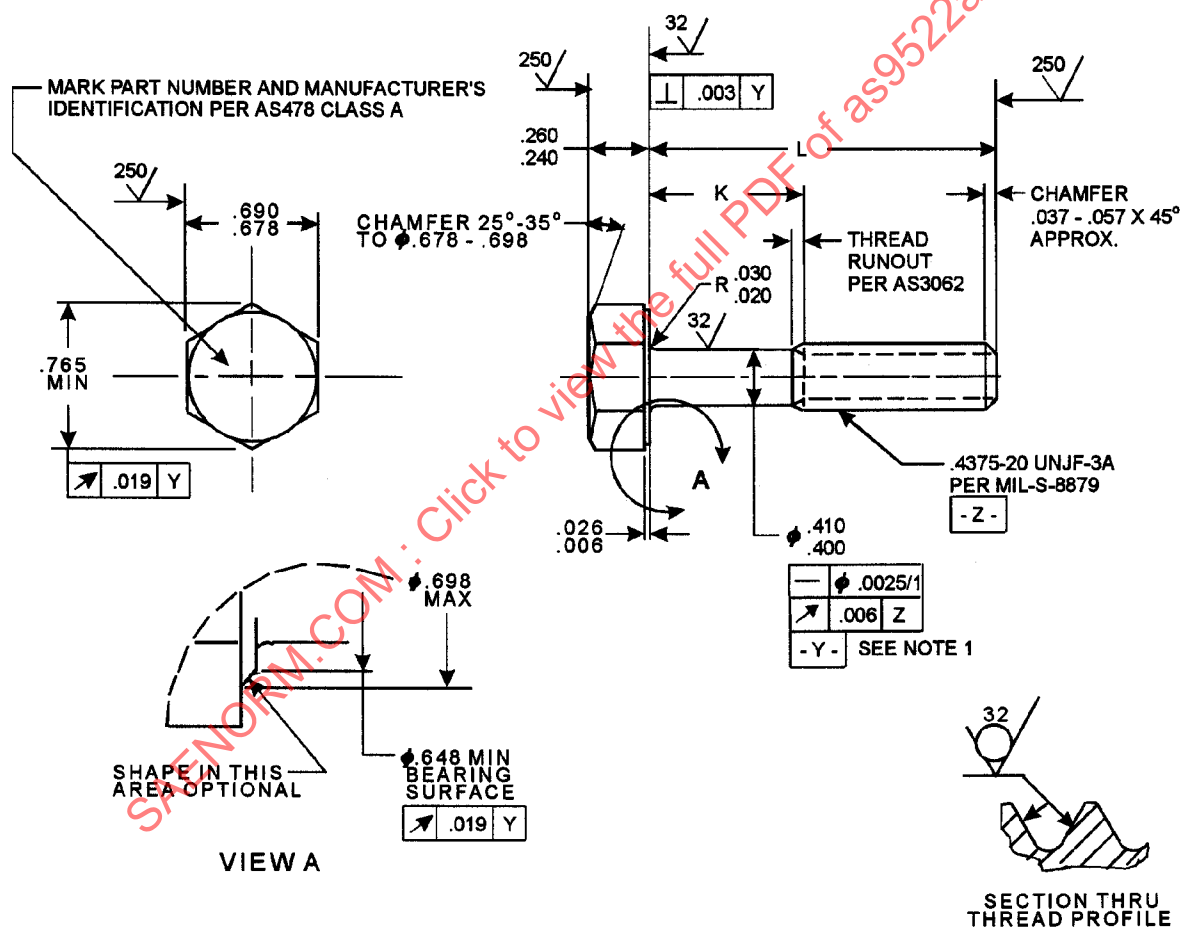


FIGURE 1 - BOLT

PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE & PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

(R)

AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, STEEL,
CADMIUM PLATED, UNS G87400, 125 KSI MIN,
.4375-20 UNJF-3A

AS9522
SHEET 1 OF 3**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1999-04 REVISED 2003-06 REAFFIRMED 2007-06

AS9522

PART NO.	L	K	APPROX. MASS LB/100
MS9522-04	.678 - .698	.105 - .125	5.78
MS9522-05	.740 - .760	.105 - .125	6.01
MS9522-06	.802 - .822	.105 - .125	6.24
MS9522-07	.865 - .885	.105 - .125	6.47
MS9522-08	.928 - .948	.105 - .125	6.69
MS9522-09	.990 - 1.010	.105 - .125	6.92
MS9522-10	1.052 - 1.072	.105 - .125	7.15
MS9522-11	1.115 - 1.135	.105 - .125	7.37
MS9522-12	1.178 - 1.198	.105 - .125	7.60
MS9522-13	1.240 - 1.260	.125 - .145	7.83
MS9522-14	1.302 - 1.322	.128 - .188	8.06
MS9522-15	1.365 - 1.385	.190 - .250	8.28
MS9522-16	1.428 - 1.448	.252 - .312	8.51
MS9522-17	1.490 - 1.510	.315 - .375	8.74
MS9522-18	1.552 - 1.572	.378 - .438	8.97
MS9522-19	1.615 - 1.635	.440 - .500	9.19
MS9522-20	1.678 - 1.698	.502 - .562	9.42
MS9522-21	1.740 - 1.760	.565 - .625	9.65
MS9522-22	1.865 - 1.885	.690 - .750	10.10
MS9522-23	1.990 - 2.010	.815 - .875	10.56
MS9522-24	2.115 - 2.135	.940 - 1.000	11.01
MS9522-25	2.240 - 2.260	1.065 - 1.125	11.47
MS9522-26	2.365 - 2.385	1.190 - 1.250	11.92
MS9522-27	2.490 - 2.510	1.315 - 1.375	12.38
MS9522-28	2.615 - 2.635	1.440 - 1.500	12.83
MS9522-29	2.740 - 2.760	1.565 - 1.625	13.29
MS9522-30	2.865 - 2.885	1.690 - 1.750	13.74
MS9522-31	2.990 - 3.010	1.815 - 1.875	14.20
MS9522-32	3.115 - 3.135	1.940 - 2.000	14.65
MS9522-33	3.240 - 3.260	2.065 - 2.125	15.11
MS9522-34	3.365 - 3.385	2.190 - 2.250	15.56
MS9522-35	3.490 - 3.510	2.315 - 2.375	16.02
MS9522-36	3.615 - 3.635	2.440 - 2.500	16.47
MS9522-37	3.740 - 3.760	2.565 - 2.625	16.93
MS9522-38	3.865 - 3.885	2.690 - 2.750	17.38
MS9522-39	3.990 - 4.010	2.815 - 2.875	17.84
MS9522-40	4.115 - 4.135	2.940 - 3.000	18.29
MS9522-41	4.240 - 4.260	3.065 - 3.125	18.74
MS9522-42	4.365 - 4.385	3.190 - 3.250	19.20
MS9522-43	4.490 - 4.510	3.315 - 3.375	19.65
MS9522-44	4.615 - 4.635	3.440 - 3.500	20.11
MS9522-45	4.740 - 4.760	3.565 - 3.625	20.56
MS9522-46	4.865 - 4.885	3.690 - 3.750	21.02
MS9522-47	4.990 - 5.010	3.815 - 3.875	21.47
MS9522-48	5.115 - 5.135	3.940 - 4.000	21.93
MS9522-49	5.240 - 5.260	4.065 - 4.125	22.38
MS9522-50	5.365 - 5.385	4.190 - 4.250	22.84
MS9522-51	5.490 - 5.510	4.315 - 4.375	23.29
MS9522-52	5.615 - 5.635	4.440 - 4.500	23.75
MS9522-53	5.740 - 5.760	4.565 - 4.625	24.20
MS9522-54	5.865 - 5.885	4.690 - 4.750	24.66
MS9522-55	5.990 - 6.010	4.815 - 4.875	25.11