

ADOPTION NOTICE

SAE-AS9523, "BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .500-20 UNJF-3A", was adopted on 15-OCT-99 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Defense Supply Center Philadelphia, ATTN: DSCP-ITAA, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Copies of this document may be purchased from the Society of Automotive Engineers 400 Commonwealth Drive Warrendale, Pennsylvania, United States, 15096-0001. <http://www.sae.org/>

Custodians:

Army - AV
Navy - AS
Air Force - 99
DLA - IS

Adopting Activity:

DLA - IS

SAENORM.COM : Click to view the full PDF of SAE-AS9523

FSC 5306

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9523

FEDERAL SUPPLY CLASS
5306

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9523A, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9523A, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9523

THIRD ANGLE PROJECTION



ISSUED 1999-08

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: AMS 7452

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BOLT, MACHINE, HEXAGON HEAD, STEEL,
CADMIUM PLATED, .500-20 UNJF-3A

AS9523
SHEET 1 OF 3

Copyright 1999 Society of Automotive Engineers, Inc.
All rights reserved.

Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8510
TO PLACE A DOCUMENT ORDER: (724) 776-4970

FAX: (724) 776-0790
Distributed under license from the IHS Archive:SS:
FAX: (724) 776-0790

<http://www.sae.org>

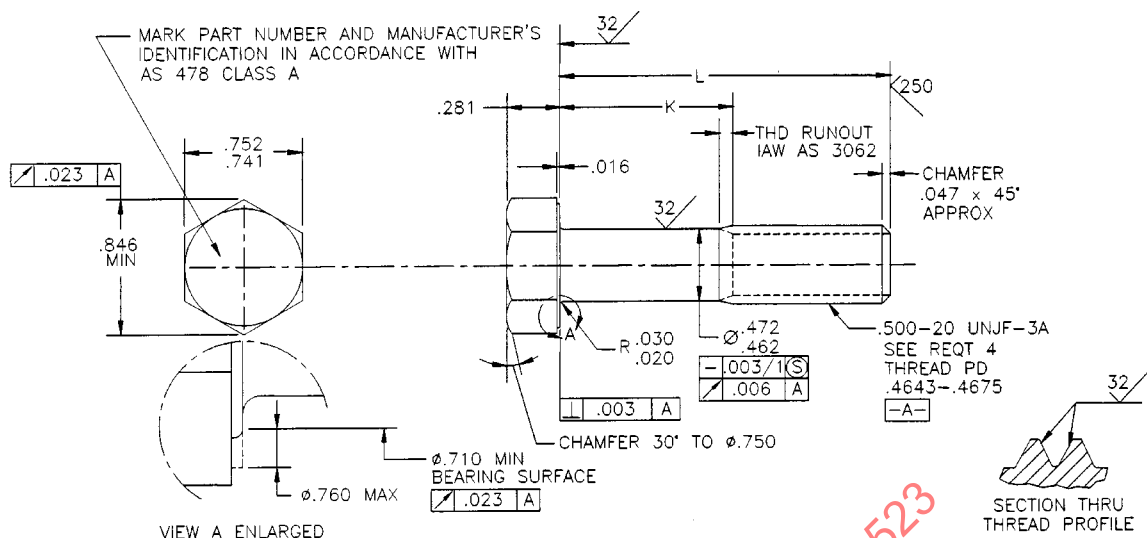


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100	DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	.812	.105-.125	7.77	-31	3.250	1.940-2.000	19.55
-05	.875	.105-.125	8.07	-32	3.375	2.065-2.125	20.16
-06	.938	.105-.125	8.37	-33	3.500	2.190-2.250	20.76
-07	1.000	.105-.125	8.67	-34	3.625	2.315-2.375	21.36
-08	1.062	.105-.125	8.98	-35	3.750	2.440-2.500	21.97
-09	1.125	.105-.125	9.28	-36	3.875	2.565-2.625	22.57
-10	1.188	.105-.125	9.58	-37	4.000	2.690-2.750	23.18
-11	1.250	.105-.125	9.88	-38	4.125	2.815-2.875	23.78
-12	1.312	.105-.125	10.19	-39	4.250	2.940-3.000	24.38
-13	1.375	.105-.125	10.49	-40	4.375	3.065-3.125	24.99
-14	1.438	.128-.188	10.79	-41	4.500	3.190-3.250	25.59
-15	1.500	.190-.250	11.09	-42	4.625	3.315-3.375	26.20
-16	1.562	.252-.312	11.39	-43	4.750	3.440-3.500	26.80
-17	1.625	.315-.375	11.70	-44	4.875	3.565-3.625	27.41
-18	1.688	.378-.438	12.00	-45	5.000	3.690-3.750	28.01
-19	1.750	.440-.500	12.30	-46	5.125	3.815-3.875	28.61
-20	1.875	.565-.625	12.90	-47	5.250	3.940-4.000	29.22
-21	2.000	.690-.750	13.51	-48	5.375	4.065-4.125	29.82
-22	2.125	.815-.875	14.11	-49	5.500	4.190-4.250	30.43
-23	2.250	.940-1.000	14.72	-50	5.625	4.315-4.375	31.03
-24	2.375	1.065-1.125	15.32	-51	5.750	4.440-4.500	31.64
-25	2.500	1.190-1.250	15.93	-52	5.875	4.565-4.625	32.24
-26	2.625	1.315-1.375	16.53	-53	6.000	4.690-4.750	32.84
-27	2.750	1.440-1.500	17.13				
-28	2.875	1.565-1.625	17.74				
-29	3.000	1.690-1.750	18.34				
-30	3.125	1.815-1.875	18.95				