

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9579

FEDERAL SUPPLY CLASS
5306

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9579C, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9579C, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9579

THIRD ANGLE PROJECTION



ISSUED 2000-08

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE


SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED
WASHER HEAD, DRILLED, PD SHANK, AMS 5731,
SILVER PLATED, .500-20 UNJF-3A

AS9579
SHEET 1 OF 3

AS9579	
--------	--

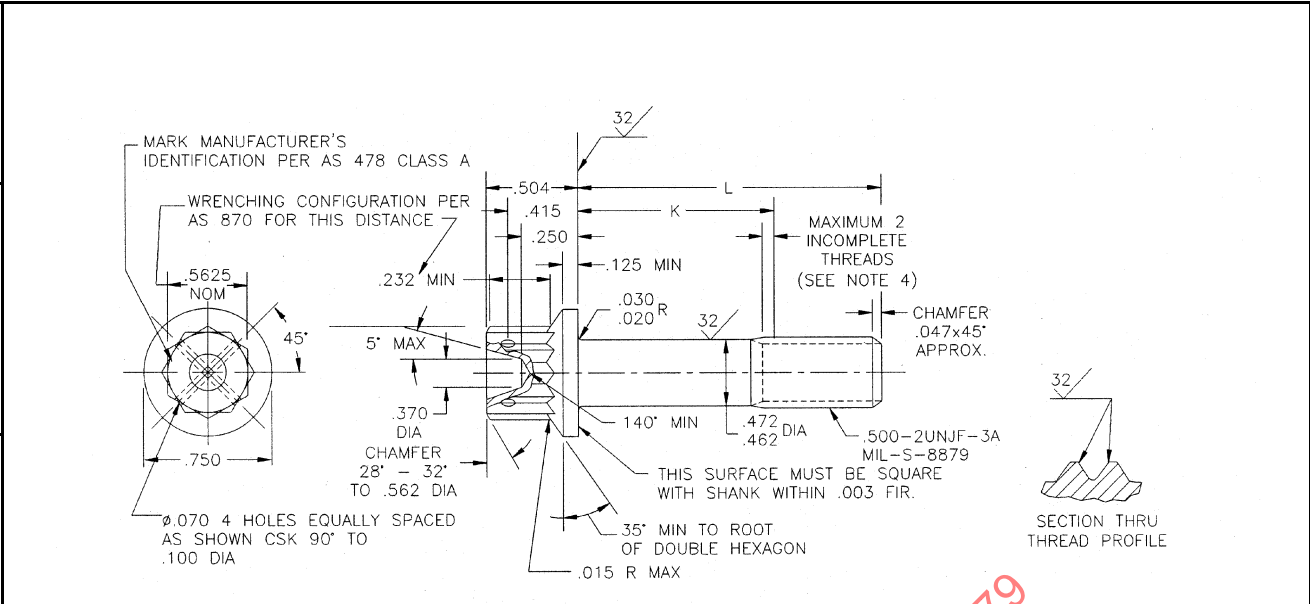

PART NO	L	K	APPROX WEIGHT LB/100	PART NO	L	K	APPROX WEIGHT LB/100	PART NO	L	K	APPROX WEIGHT LB/100
MS9579-03	.750	.105-.125	7.54	MS9579-24	2.375	1.065-1.125	15.21	MS9579-44	4.875	3.565-3.625	27.32
MS9579-04	.812	.105-.125	7.83	MS9579-25	2.500	1.190-1.250	15.85	MS9579-45	5.000	3.690-3.750	27.92
MS9579-05	.875	.105-.125	8.12	MS9579-26	2.625	1.315-1.375	16.42	MS9579-46	5.125	3.815-3.875	28.53
MS9579-06	.938	.105-.125	8.41	MS9579-27	2.750	1.440-1.500	17.01	MS9579-47	5.250	3.940-4.000	29.13
MS9579-07	1.000	.105-.125	8.70	MS9579-28	2.875	1.565-1.625	17.61	MS9579-48	5.375	4.065-4.125	29.74
MS9579-08	1.062	.105-.125	8.99								
MS9579-09	1.125	.105-.125	9.28	MS9579-29	3.000	1.690-1.750	18.22	MS9579-49	5.500	4.190-4.250	30.35
MS9579-10	1.188	.105-.125	9.57	MS9579-30	3.125	1.815-1.875	18.83	MS9579-50	5.625	4.315-4.375	30.95
MS9579-11	1.250	.105-.125	9.86	MS9579-31	3.250	1.940-2.000	19.43	MS9579-51	5.750	4.440-4.500	31.56
MS9579-12	1.312	.105-.125	10.15	MS9579-32	3.375	2.065-2.125	20.04	MS9579-52	5.875	4.565-4.625	32.16
MS9579-13	1.375	.105-.125	10.45	MS9579-33	3.500	2.190-2.250	20.65	MS9579-53	6.000	4.690-4.750	32.77
MS9579-14	1.438	.128-.188	10.74	MS9579-34	3.625	2.315-2.375	21.26	MS9579-54	1.812	.502-.562	12.52
MS9579-15	1.500	.190-.250	11.04	MS9579-35	3.750	2.440-2.500	21.86	MS9579-55	1.938	.628-.688	13.11
MS9579-16	1.562	.252-.312	11.33	MS9579-36	3.875	2.565-2.625	22.47				
MS9579-17	1.625	.315-.375	11.63	MS9579-37	4.000	2.690-2.750	23.07				
MS9579-18	1.688	.378-.438	11.92	MS9579-38	4.125	2.815-2.875	23.68				
MS9579-19	1.750	.440-.500	12.22	MS9579-39	4.250	2.940-3.000	24.29				
MS9579-20	1.875	.565-.625	12.81	MS9579-40	4.375	3.065-3.125	24.89				
MS9579-21	2.000	.690-.750	13.41	MS9579-41	4.500	3.190-3.250	25.50				
MS9579-22	2.125	.815-.875	14.00	MS9579-42	4.625	3.315-3.375	26.11				
MS9579-23	2.250	.940-1.000	14.61	MS9579-43	4.750	3.440-3.500	26.71				

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .012 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. FINISH: SILVER PLATE AMS 2411 .0002-.0006 THICK AT THREAD PD. DIMENSIONS SPECIFIED ARE AFTER PLATING. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
7. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
8. MANUFACTURING SPECIFICATION: AMS 7477.

AEROSPACE STANDARD
BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, AMS 5731, SILVER PLATED, .500-20 UNJF-3A

AS9579 SHEET 2 OF 3	
-------------------------------	--