

AS9581

FEDERAL SUPPLY CLASS
5310

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9581B, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9581B, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9581

THIRD ANGLE PROJECTION



ISSUED 1999-08

PREPARED BY SAE COMMITTEE E-25


PROCUREMENT SPECIFICATION: NONE

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

WASHER, KEY-CRES, AMS 5510, 90°, LOCKING

AS9581
SHEET 1 OF 3

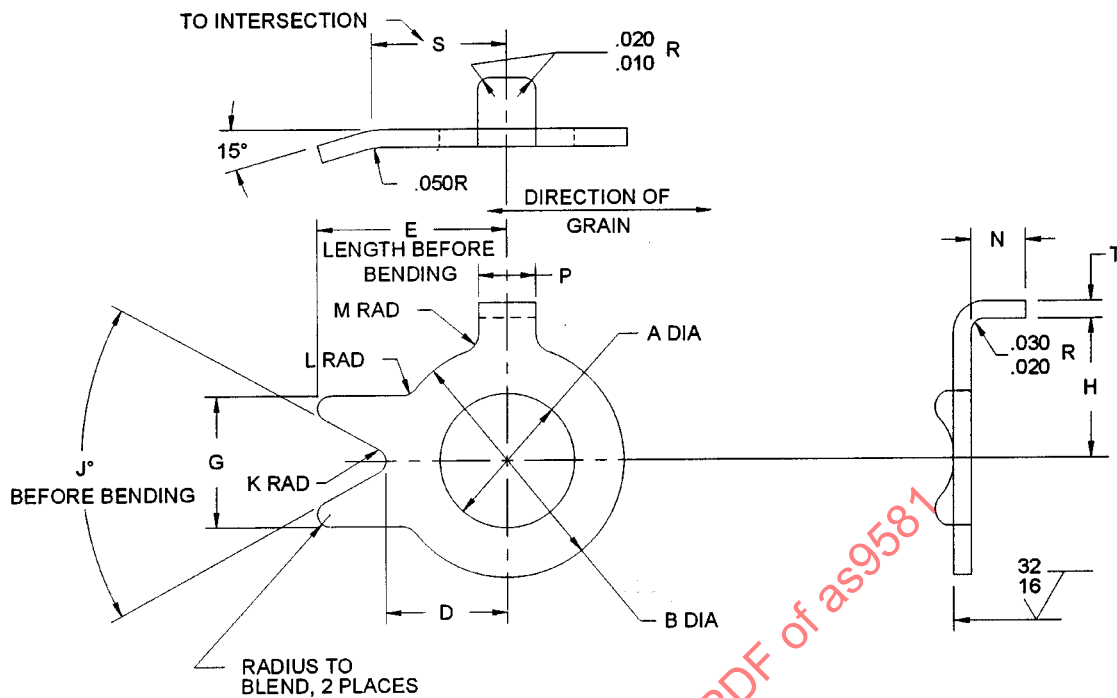

PART NO.	NOM SIZE	A +.00 5 -.000	B +.010 -.000	D +.005 -.000	E +.010 -.000	G +.010 -.000	H ± .005	± 2°	K	L	M	N +.010 -.000	P +.005 -.000	S ± .005	T	APPROX WEIGHT LB/100
MS9581-08	.164	.170	.310	.180	.275	.175	.186	50°	.015	.037	.037	.080	.080	.180	.019-.025	.041
MS9581-09	.190	.195	.370	.190	.295	.200	.226	60°	.015	.037	.037	.095	.110	.210	.019-.025	.065
MS9581-10	.250	.255	.440	.220	.350	.250	.270	60°	.025	.040	.040	.100	.110	.240	.028-.036	.128
MS9581-11	.312	.320	.495	.250	.410	.280	.330	60°	.030	.040	.050	.100	.140	.280	.028-.036	.160
MS9581-12	.375	.390	.560	.280	.450	.320	.370	60°	.030	.040	.050	.140	.140	.320	.028-.036	.182
MS9581-13	.438	.450	.685	.345	.525	.390	.420	60°	.045	.040	.050	.150	.170	.380	.032-.040	.246
MS9581-14	.500	.515	.745	.375	.590	.425	.470	80°	.050	.050	.050	.150	.200	.420	.032-.040	.398
MS9581-15	.562	.575	.870	.440	.640	.500	.545	80°	.050	.050	.075	.150	.200	.480	.032-.040	.532
MS9581-16	.625	.640	.930	.470	.680	.530	.570	80°	.050	.050	.075	.150	.200	.500	.032-.040	.592
MS9581-17	.750	.765	1.055	.530	.730	.550	.670	90°	.050	.060	.100	.150	.230	.570	.032-.040	.709
MS9581-18	.875	.890	1.245	.625	.860	.600	.795	90°	.050	.060	.100	.150	.260	.680	.032-.040	.821
MS9581-19	1.000	1.01 5	1.430 5	.715	.950	.650	.870	90°	.100	.060	.100	.150	.290	.780	.032-.040	1.060