



AEROSPACE STANDARD

AS 965


SOCIETY OF AUTOMOTIVE ENGINEERS, Inc.

485 Lexington Ave., New York, N. Y. 10017

Issued 10-31-67

Revised

DRIVE - STUDDED, ACCESSORY, 8.000 BC ROUND, DESIGN STANDARD FOR

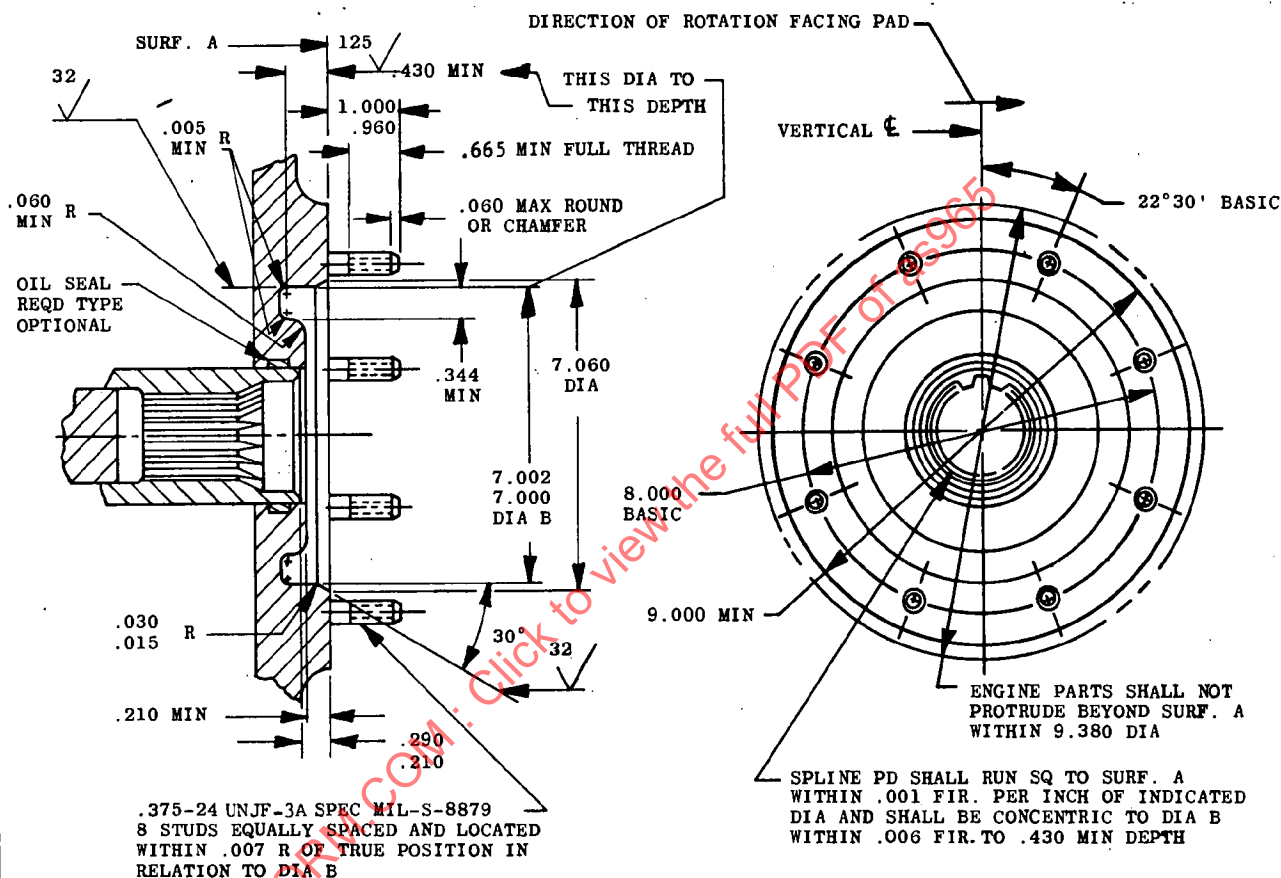

VARIABLE SPEED (ELECTRICAL EQUIPMENT)					
DASH NO.	RATED POWER HP	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1V	30	8000	0.800	80	750
-2V	30	12000	0.800	100	1200
-3V	40	8000	1.200	115	1250
-4V	65	8000	1.200	150	2000

VARIABLE SPEED-CONSTANT TORQUE (FLUID POWER PUMPS)					
DASH NO.	RATED TORQUE LB IN.	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1CT	4000	4000	1.625	125	600
-2CT	4000	6000	1.625	125	600