



AEROSPACE STANDARD

AS 965A


Society of Automotive Engineers, Inc.

TWO PENNSYLVANIA PLAZA, NEW YORK, N. Y. 10001

Issued 10-31-67

Revised 10-1-69

DRIVE - STUDDED, ACCESSORY, 8.000 BC ROUND, DESIGN STANDARD FOR

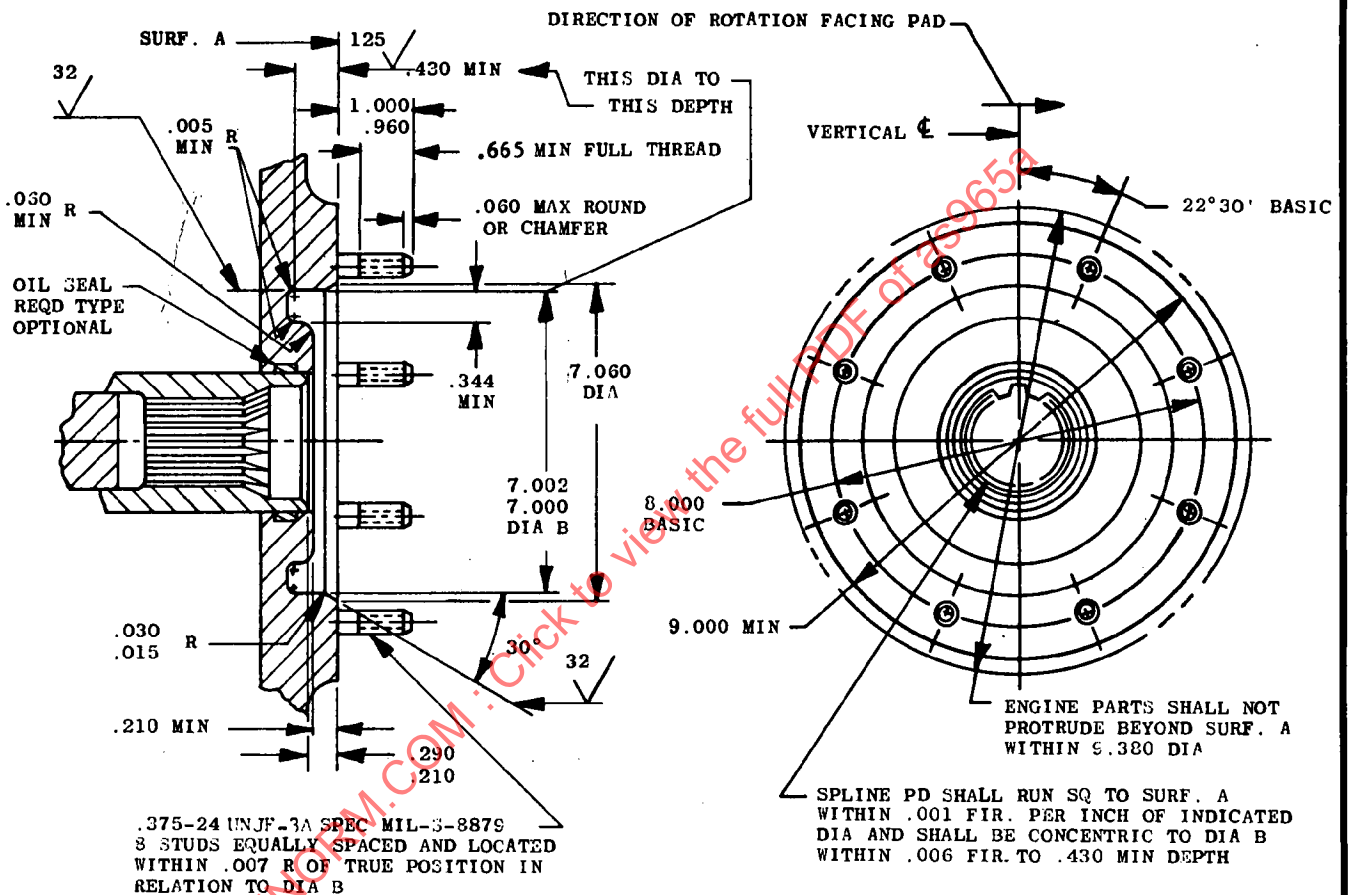

(A)

DASH NO.	RATED POWER HP	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-11V	35	9000	0.300	30	750
-12V	35	12000	0.800	100	1200
-13V	55	9000	1.200	115	1250
-14V	75	9000	1.200	150	2000
-5V	110	9000	1.200	175	2500

(A)

DASH NO.	RATED TORQUE LB IN.	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1CT	4000	4000	1.625	125	600
-2CT	4000	6000	1.625	125	600

RECEIVED
11/11/1992