



AEROSPACE STANDARD


Society of Automotive Engineers, Inc.
TWO PENNSYLVANIA PLAZA, NEW YORK, N.Y. 10001

AS 967A

Issued 10-31-67

Revised 10-1-69

DRIVE - STUDED, ACCESSORY, 10.000 BC ROUND, DESIGN STANDARD FOR

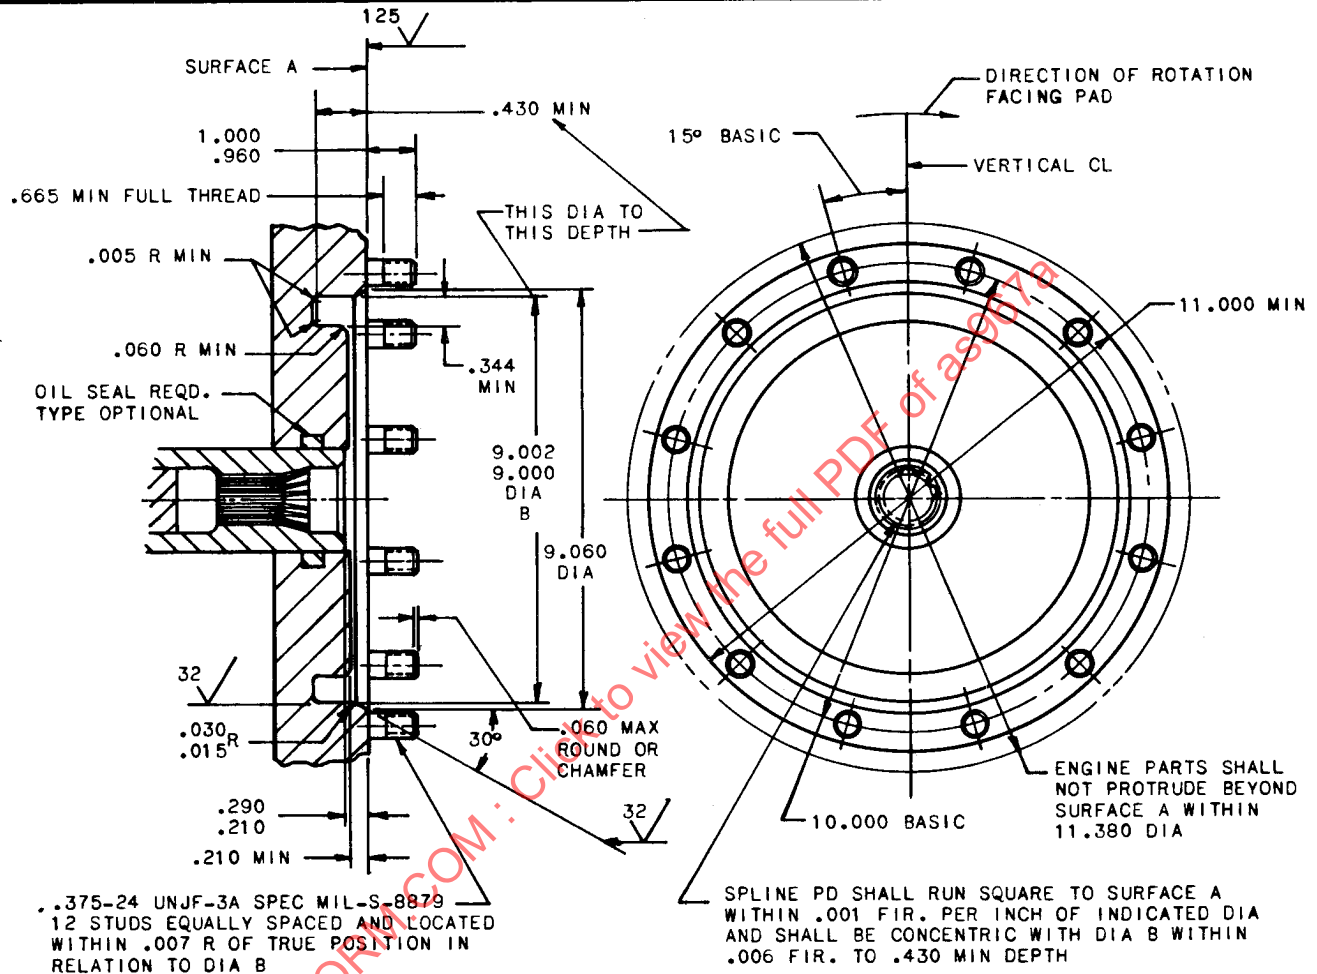

DASH NO.	RATED POWER HP	RATED SPEED RPM +0,-10%	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT-LB IN. MAX
-11V	55	9,000	1.200	135	1,700
-12V	75	9,000	1.200	150	2,000
-13V	110	9,000	1.200	175	2,500
-14V	165	9,000	1.625	225	3,000
-15V	220	9,000	1.625	275	3,600
6V	75	20,000	0.800	90	900
7V	110	20,000	1.200	115	1,200
8V	165	19,000	1.200	155	1,600
9V	220	16,000	1.200	200	2,900

DASH NO.	RATED TORQUE LB IN.	RATED SPEED RPM ±5%	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT-LB IN. MAX
-1CT	4,000	4,000	1.625	125	600
-2CT	9,000	4,000	2.000	200	1,200

SAE Technical Board rules provide that: "All technical reports, including standards, approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."

SAE 967A
10-31-67
10-1-69
1992