


SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."


SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A
AS977™

RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
SAENORM.COM : Click to view the full PDF of as977a	
For more information on this standard, visit https://www.sae.org/standards/content/AS977A/	THIRD ANGLE PROJECTION 

CUSTODIAN: G-3/G-3E		PROCUREMENT SPECIFICATION: NONE	
	AEROSPACE STANDARD		AS977™
	COUPLING - CLAMP, GROOVE V-BAND, FORGED, 6.400, 9.400, 11.400 FLANGE OD		
			REV. A

ISSUED 1971-10 REAFFIRMED 2012-11 STABILIZED 2022-10

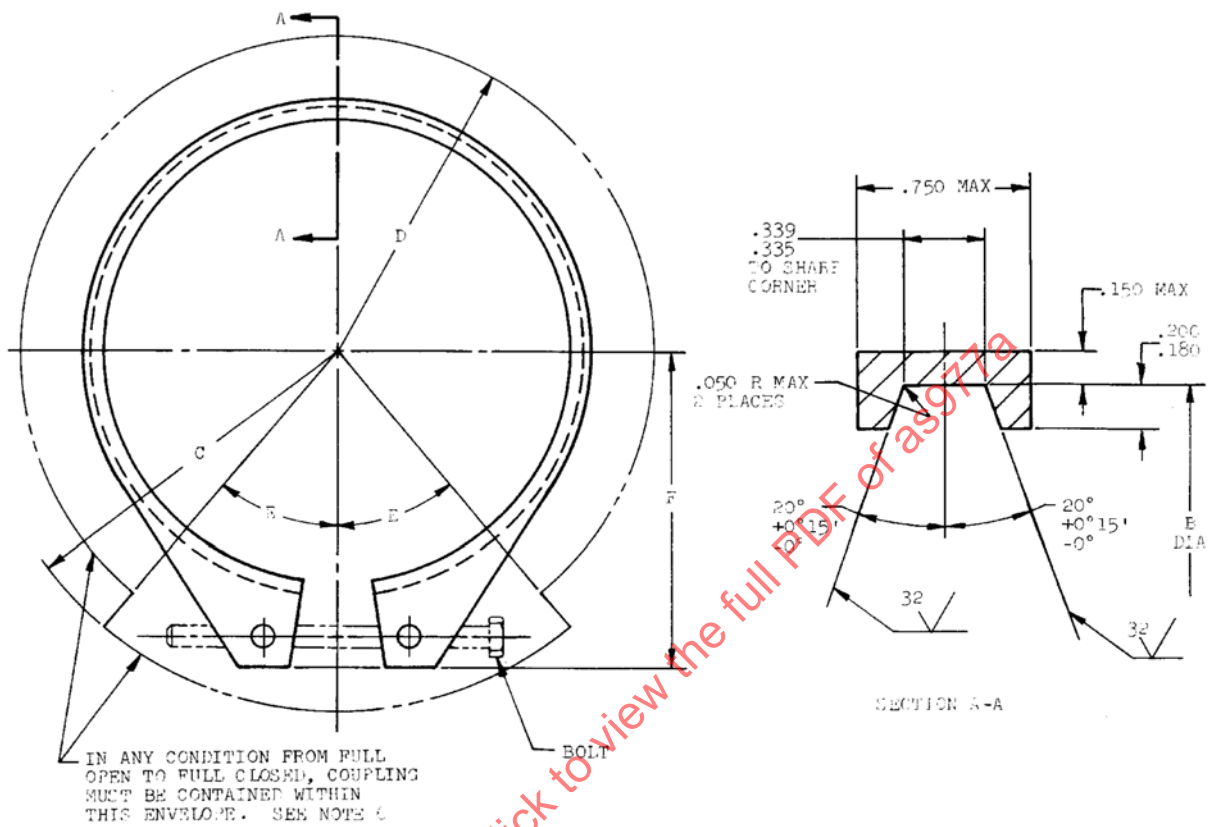

DASH NUMBER	B DIA ± .010	C RAD MAX	D RAD MAX	E MAX	F MAX	RATED AXIAL LOAD SEE NOTE 10
01	6.500	4.880	4.000	45°	4.000	13,180
02	9.500	6.250	5.500	40°	5.500	25,590
03	11.500	7.620	6.500	40°	6.500	37,950