

	SURFACE VEHICLE RECOMMENDED PRACTICE	
	SAE	J1835 JAN2014
	Issued Revised	1990-03 2014-01
Superseding J1835 MAY2004		
Fastener Hardware for Wheels for Demountable Rims		

RATIONALE

This document is being updated to current standards and to correct some tables to prepare this document to be stabilized at a later date.

1. SCOPE

This SAE Recommended Practice establishes the mounting hardware to be used with demountable rims, wheels for demountable rims, rim spacers designed for 28 degrees bevel mounting systems, and intended for use on commercial vehicles. The dimensions given are those necessary to maintain serviceability and interchangeability of mounting hardware.

This document is divided into two sections. Section 1 establishes the practice for new designs for mounting hardware. Section 2 records information on current mounting hardware. Special and less common applications are not covered in this document.

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J393 Nomenclature - Wheels, Hubs, and Rims for Commercial Vehicles

SAE J851 Dimensions - Wheels for Demountable Rims, Demountable Rims, and Spacer Bands - Truck and Bus

3. DEFINITIONS

A detailed listing of basic nomenclature is contained in SAE J393. Figures 1 through 8 and Tables 1 through 3, introduce, illustrate, and specify additional nomenclature and definitions. All dimensions are in inches unless otherwise specified. Single clamps are rim clamps with one hole and double clamps are rim clamps with two holes.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2014 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: +1 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
 on this Technical Report, please visit
http://www.sae.org/technical/standards/J1835_201401**

4. SECTION 1 - MOUNTING HARDWARE DIMENSIONS (RECOMMENDED PRACTICE)

4.1 Rim Clamp Nut

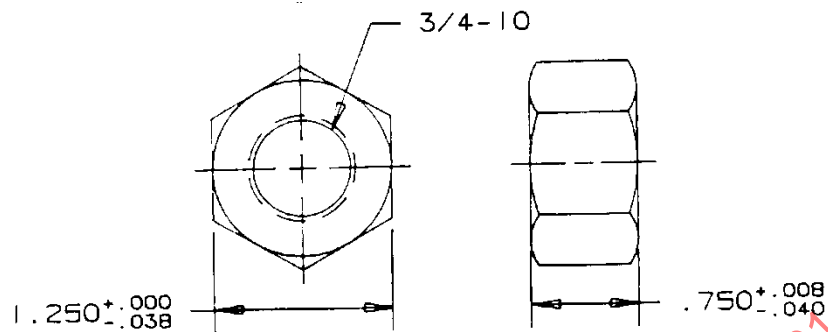


FIGURE 1 - RIM CLAMP NUT

4.2 Rim Clamp Stud Standout

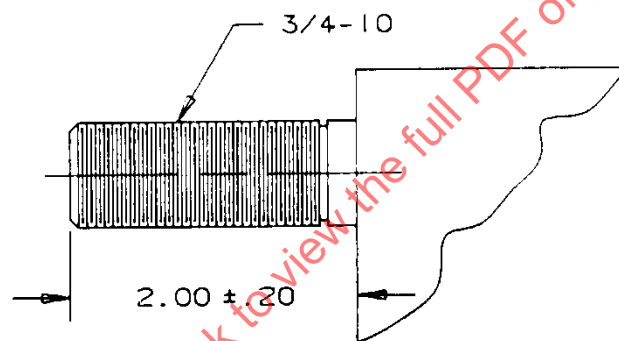


FIGURE 2 - RIM CLAMP STUD STANDOUT

4.3 Rim Clamp Dimensions

4.3.1 Dual Mounting

4.3.1.1 Dual Assembly

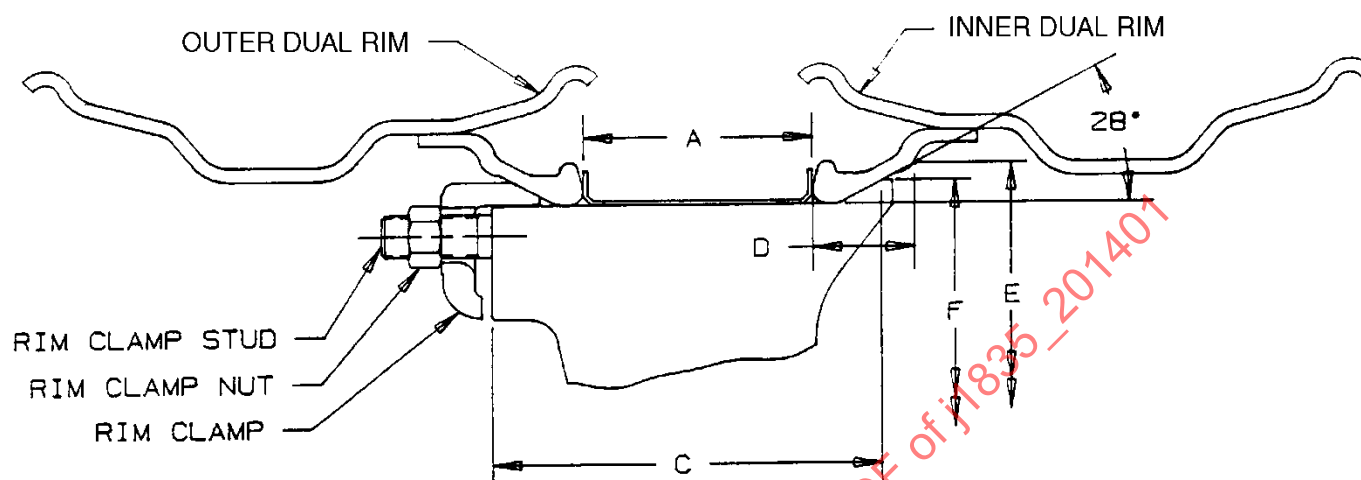


FIGURE 3 - DUAL ASSEMBLY, DROP CENTER RIMS SHOWN

TABLE 1 - DIMENSIONS FOR SINGLE CLAMPS (DUAL MOUNTING), REFER TO FIGURE 3

(A) Space r Width	(B) Rim Clamp Toe Length	(C) Spoke Length	(D) Rim Bevel Intersection (28 degrees Layout Line)	(E) 28 degrees Bevel Layout Diameter (Nominal Wheel Diameter)	(F) Outside Diameter (Reference)
+0.060 -0.047	±0.05	±0.06	±0.040		
3.380	1.84	6.56	1.762	15, 20, 22, 24	E - 0.635
3.620	1.59	6.56	1.762	15, 20, 22, 24	E - 0.635
4.000	1.21	6.56	1.762	15, 20, 22, 24	E - 0.635
3.620	1.84	6.81	1.762	20, 22, 24	E - 0.635
4.000	1.46	6.81	1.762	20, 22, 24	E - 0.635
4.250	1.21	6.81	1.762	20, 22, 24	E - 0.635
3.620	1.59	6.81	2.000	20, 24	E - 0.719
4.000	1.21	6.81	2.000	20, 24	E - 0.719

TABLE 2 - DIMENSIONS FOR DOUBLE CLAMPS (DUAL MOUNTING), REFER TO FIGURE 3

(A) Space r Width	(B) Rim Clamp Toe Length	(C) Spoke Length	(D) Rim Bevel Intersection (28 degrees Layout Line)	(E) 28 degrees Bevel Layout Diameter (Nominal Wheel Diameter)	(G) Rim Clamp Diameter r	(H) Hole Spread	(J) Rim Clamp Height	(F) Outside Diameter (Reference)
+0.060 -0.047	±0.05	±0.06	±0.040		±0.03	±0.01	±0.03	
4.000	1.21	6.56	1.762	15	13.54	4.50	1.82	E - 0.635
4.000	1.21	6.56	1.762	20	18.54	6.81	2.42	E - 0.635
4.000	1.21	6.56	1.762	22	20.54	8.91	2.42	E - 0.635
3.380	1.84	6.56	1.762	15	13.54	4.50	1.82	E - 0.635
3.380	1.84	6.56	1.762	20	18.54	6.81	2.42	E - 0.635
3.380	1.84	6.56	1.762	22	20.54	8.91	2.42	E - 0.635

4.3.1.2 Single Clamps

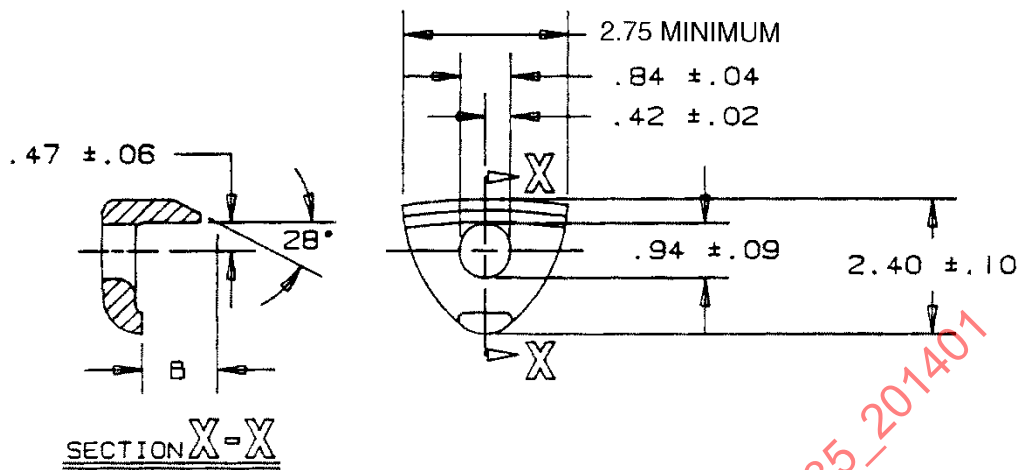


FIGURE 4 - SINGLE CLAMPS

4.3.1.3 Double Clamps

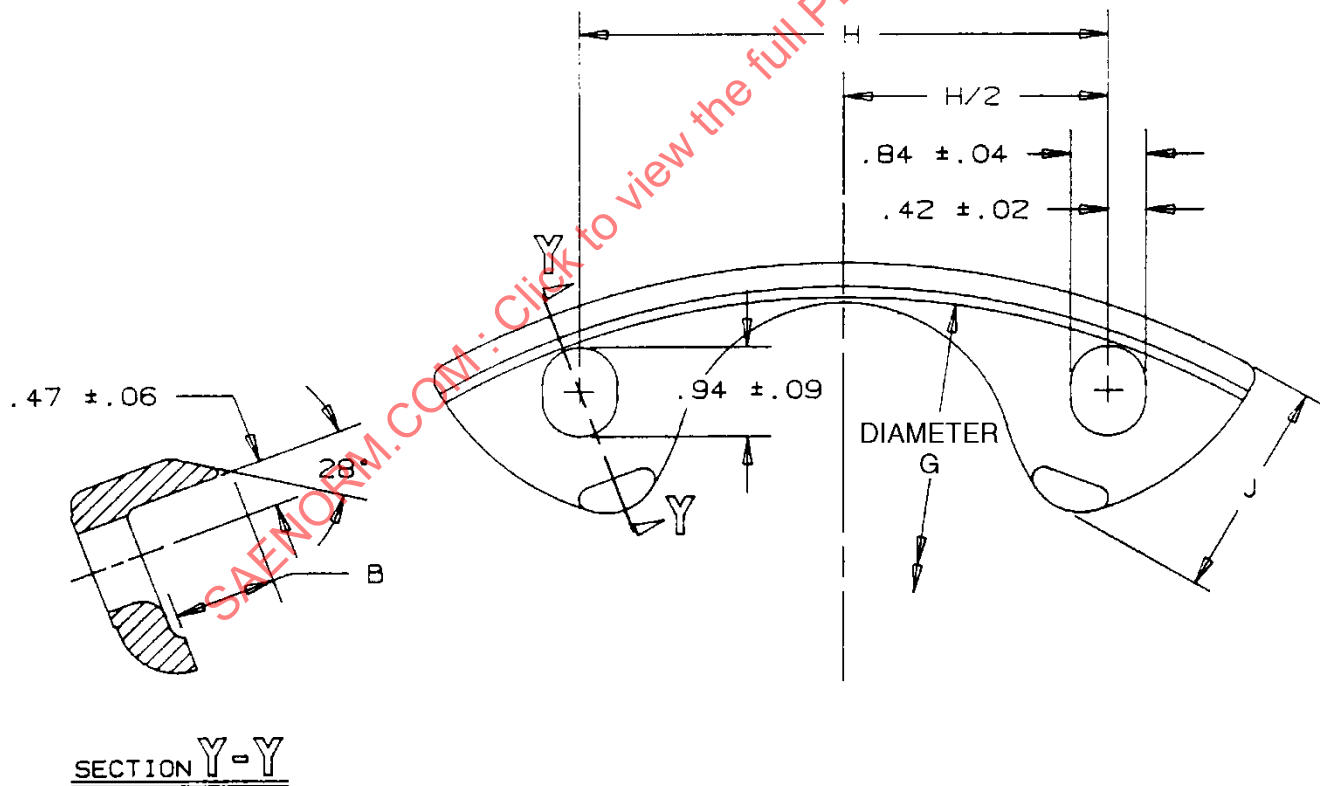


FIGURE 5 - DOUBLE CLAMPS

4.3.2 Single Mounting

4.3.2.1 Single Assembly

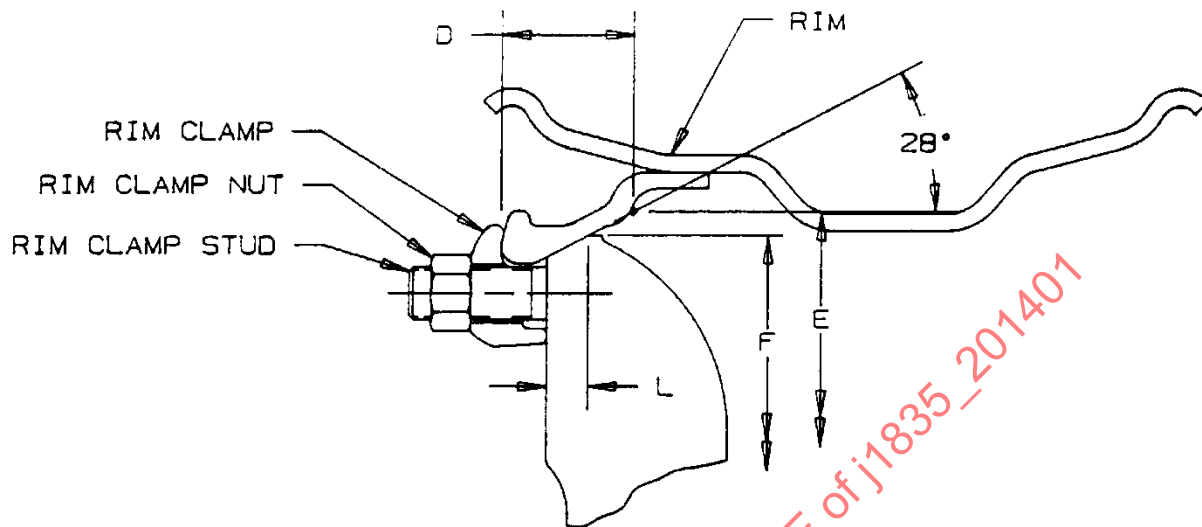


FIGURE 6 - SINGLE ASSEMBLY, DROP CENTER RIM SHOWN

TABLE 3 - DIMENSIONS FOR SINGLE CLAMPS (SINGLE MOUNTING), REFER TO FIGURE 6

(E) 28 degrees Bevel Layout Diameter (Nominal Wheel Diameter)	(D) Rim Bevel Intersection (28 degrees Layout Line ± 0.040)	(K) Rim Clamp Offset ± 0.03	(L) Bevel Length ± 0.06	(F) Outside Diameter (Reference)
20	1.762	0.46	0.60	E - 0.635
22	1.762	0.46	0.60	E - 0.635
24	1.762	0.46	0.60	E - 0.635
20	2.000	0.63	0.60	E - 0.719
24	2.000	0.63	0.60	E - 0.719

4.3.2.2 Single Clamps

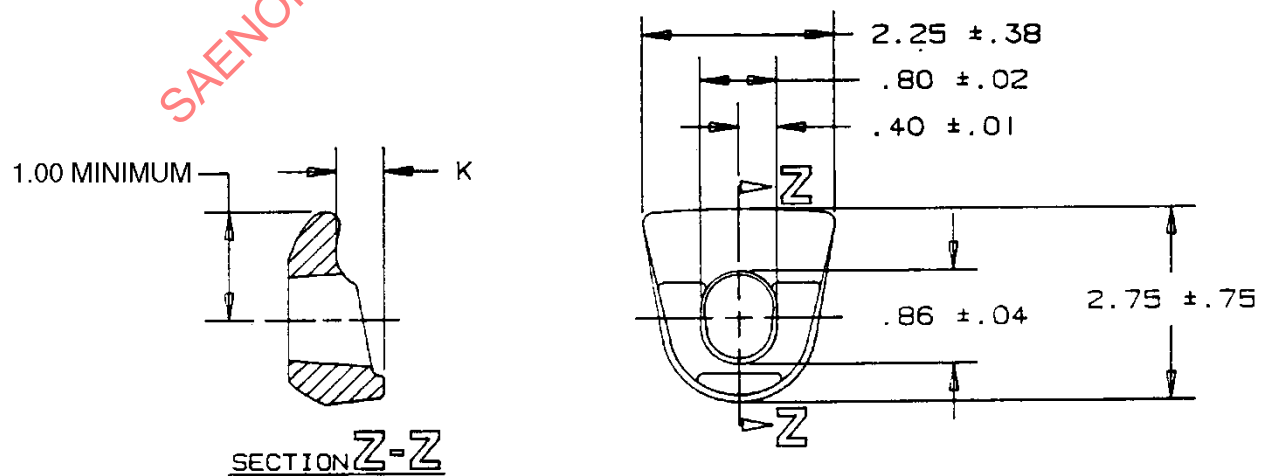


FIGURE 7 - SINGLE CLAMPS