



SURFACE VEHICLE RECOMMENDED PRACTICE

J374

MAR2015

Issued 1968-12
Stabilized 2015-03

Superseding J374 MAY2009

Vehicle Roof Strength Test Procedure

RATIONALE

This procedure is superseded in the industry by the FMVSS 216 - Roof Crush Resistance. As there is no value added to the community in simply updating this to be consistent with FMVSS 216, the document should be Stabilized and retained for its historical reference only.

STABILIZED NOTICE

This document has been declared "Stabilized" by the SAE Impact and Rollover Test Procedure Standards Committee and will no longer be subjected to periodic reviews for currency. Users are responsible for verifying references and continued suitability of technical requirements. Newer technology may exist.

SAENORM.COM : Click to view the full PDF of J374 201503

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J374_201503**

1. **Scope**—This SAE Recommended Practice establishes a uniform laboratory test method to evaluate the strength characteristics of roof systems. The test procedure is intended to provide reliable and repeatable results and to permit numerical comparisons.

A test is conducted in which the vehicle roof system is loaded under controlled laboratory conditions.

Structural strength measurements are obtained under load application angles chosen to concentrate forces on the forward portions of the roof panel and roof supporting structure.

2. References

- 2.1 **Applicable Publications**—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.

- 2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J211-1—Instrumentation for Impact Test—Part 1—Electronic Instrumentation

SAE J211-2—Instrumentation for Impact Test—Part 2—Photographic Instrumentation

- 2.2 **Related Publications**—The following publication is provided for information purposes only and is not a required part of this document.

- 2.2.1 FEDERAL PUBLICATION—Available from Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

FMVSS 216—Roof Crush Resistance—Passenger Cars

3. Test Equipment

- 3.1 **General**—The test is conducted in a test laboratory on equipment suitable for applying and measuring required loads and deflections.

- 3.1.1 **LOADING DEVICE**—The test load is applied to the roof through a device having a flat rigid surface with minimal dimensions of 1800 x 750 mm (72 x 30 in).

- 3.1.2 **LOADING DEVICE LOCATION**—The loading device is located over the front passenger area of the vehicle so as to (as far as possible) prevent the edges of the Loading Device from contacting the vehicle during the test. (see Figure 1.)
- 3.1.3 **LOADING DEVICE TRAVEL**—The loading device is guided so as to maintain the angles specified in Figure 1 throughout the test. The load application shall be at a rate of not more than 13 mm/s (0.5 in/s) and shall be completed within 120 s. The rate of travel of the loading device shall be essentially constant. Sufficient travel shall be provided to enable the load-deflection characteristics of the structure under test to be defined.

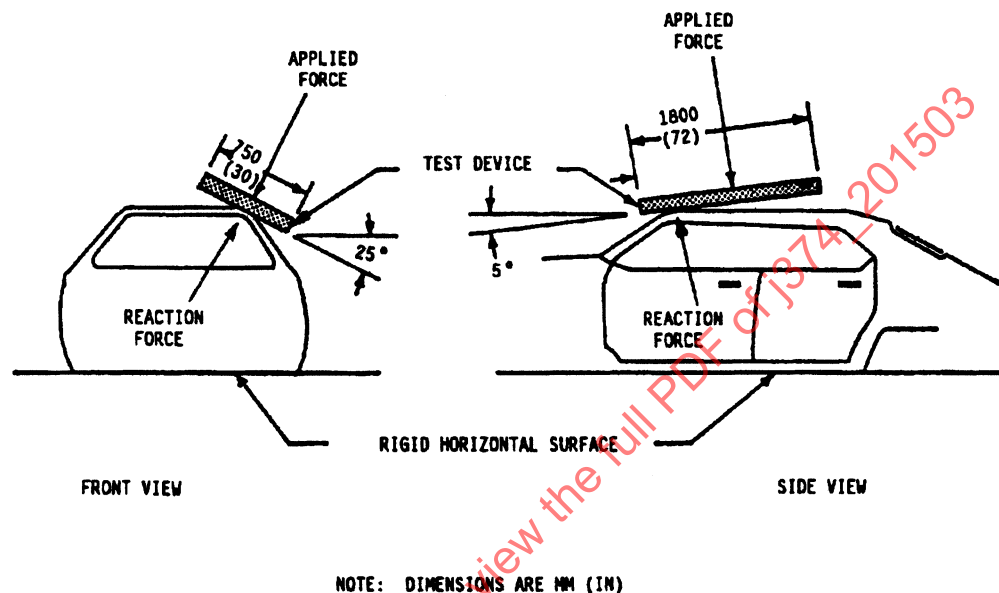


FIGURE 1—TEST DEVICE LOCATION AND APPLICATION TO THE ROOF

- 3.2 **Instrumentation**—The instrumentation data channels shall be adequate to allow the load and deflection to be determined within $\pm 3\%$ of actual load and deflections. For additional information on instrumentation, see SAE J211-1 and J211-2.
4. **Test Procedure**
- 4.1 **Body or Vehicle to be Tested**—This test may be conducted on a complete vehicle, on a body, or on a body mounted on a chassis frame. Components which may affect load or deformation (such as doors, roof panels, or fixed glass) may be installed. Movable glass shall be in its closed position. Doors are to be closed and locked.
- 4.2 **Vehicle Support**—To assure stability of the body during the test, the complete vehicle (or body) shall be rigidly mounted by placing supports directly beneath the chassis frame, or the body mounts or sills if a chassis frame is not used. The test vehicle need not necessarily be mounted in the horizontal position provided the orientation of the loading device described in 4.3 is maintained.
- 4.3 **Orientation of Loading Device**—The plane of the loading device shall be oriented to simulate a vehicle roll angle of $25 \text{ degrees} \pm 1 \text{ degree}$ and a pitch angle of $5 \text{ degrees} \pm 1 \text{ degree}$. (See Figure 1.) For purposes of this test, the bottom of the rocker panels defines the reference plane from which to measure the roll and pitch angles. With the vehicle or body supported as specified in 4.2, apply the test load to either the right or left side roof system normal to the contact surface plane of the loading device.