



SURFACE VEHICLE RECOMMENDED PRACTICE

J714™

JUN2023

Issued 1954-11
Reaffirmed 1993-04
Revised 2023-06

Superseding J714 APR1993

(R) Wheel Mounting Elements
for Off-Highway Disc Wheels

RATIONALE

This SAE Recommended Practice, SAE J714, includes wheel mounting elements subject to standardization in a series of ferrous industrial and agricultural disc wheels. The disc may be reversible or nonreversible and concave or convex. (See Figure 1 and Tables 1 and 2.) It is being revised to add additional bolt circles and bolting information that reflect practices in place as of this revision.

1. SCOPE

This SAE Recommended Practice includes wheel mounting elements subject to standardization in a series of industrial and agricultural disc wheels. The disc may be reversible or nonreversible and concave or convex. (See Figure 1 and Table 1.)

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), www.sae.org.

SAE J694 Disc Wheel and Hub or Drum Interface Dimensions - Truck and Bus

2.1.2 ISO Publications

Copies of these documents are available online at <http://webstore.ansi.org/>.

ISO 5711 Tractors and Machinery for Agricultural and Forestry - Wheel-to-Hub

2.1.3 Other Publications

DIN 74361-3 Disc Wheels for Motor Vehicles and Trailers - Part 3: Dimensions and Fastening Devices for Hub-Centering

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2023 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

For more information on this standard, visit
https://www.sae.org/standards/content/J714_202306

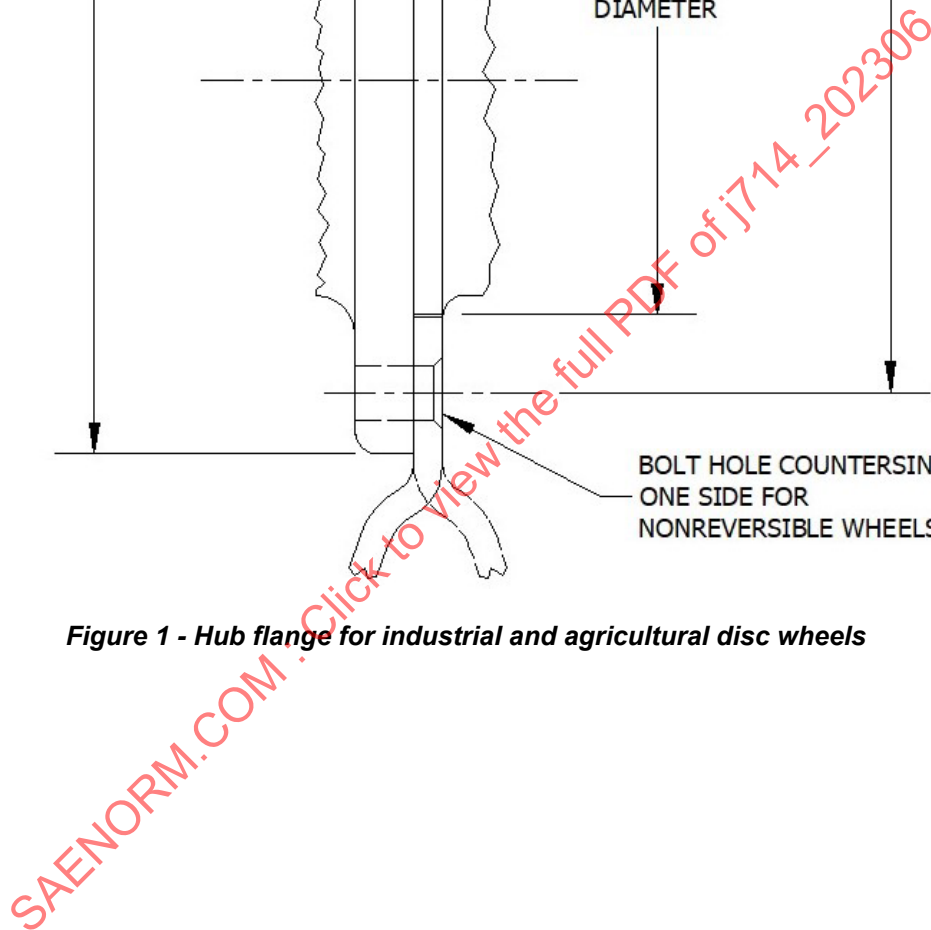


Figure 1 - Hub flange for industrial and agricultural disc wheels

Table 1 - Wheel mounting elements

Dimensions are in millimeters (inches)

No. of Bolts	Bolt Circle	Hub Pilot Maximum Diameter	Attaching Hub Bolt Diameter	Bolt Hole Countersink	Hub Flange Diameter Reference
4	127.0 (5.000)	92.1 (3.6)	12.00 (0.50)	90 degrees	160.3 (6.31)
5	114.3 (4.500)	79.4 (3.125)	11.00 (0.44)	75 degrees	144.3 (5.68)
5	139.7 (5.500)	101.7 (4.004)	12.00 ⁽¹⁾ (0.50) ⁽¹⁾	90 degrees	117.8 (7.00)
6	152.4 (6.000)	117.45 (4.625)	12.00 ⁽¹⁾ (0.50) ⁽¹⁾	90 degrees or none ⁽²⁾	185.7 (7.31)
8	203.2 (8.000)	152.4 (6.000)	14.00, 16.00, or 18.00 (0.56, 0.62, or 0.75)	90 degrees or none ⁽²⁾	242.9 (9.56)
8	275.0 (10.827)	221.0 (8.701)	18.00 (0.75)	None ⁽²⁾	317.5 (12.50)
10	285.75 (11.250)	220.2 (8.669)	22.00 (0.88)	None ⁽²⁾	340 (13.38)
10, 20	335.0 (13.189)	280.5 (11.045)	18.00 or 22.00 (0.75 or 0.88)	None ⁽²⁾	385.0 (15.16)
12	422.3 (16.625)	368.3 (14.500)	18.00 or 22.00 (0.75 or 0.88)	None ⁽²⁾	476.25 (18.75)
12	425 (16.732)	370.8 (14.372)	22.00 (0.88)	None ⁽²⁾	465 (18.31)
20	470 (18.504)	417.6 (16.441)	22.00 or 24.00 (0.88 or 0.94)	None ⁽²⁾	530 (20.87)
12	500 (19.685)	446.75 (17.589)	22.00 (0.88)	None ⁽²⁾	545 (21.46)

⁽¹⁾ Bolt size may be increased to 14.00 (0.56) only if cone head bolt is used.

⁽²⁾ Where none is noted, no countersink is required if flat nuts, flanged nuts, or nuts with washers are used.