

Product of the
Cooperative Engineering Program

SAE J744 JUL88

**Hydraulic Pump and
Motor Mounting and
Drive Dimensions**

SAE Standard
Revised July 1988

**S. A. E.
LIBRARY**

Submitted for Recognition as
an American National Standard

SAENORM.COM : Click to view the full PDF of j744_198807

742
YAW-2011

No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise, without the
prior written permission of the publisher.

Copyright 1988 Society of Automotive Engineers, Inc.

OFF-HIGHWAY MACHINERY STANDARD

Submitted for recognition as an American National Standard

SAE J744

Issued January 1952
Revised July 1988

Superseding J744 OCT83

HYDRAULIC PUMP AND MOTOR MOUNTING AND DRIVE DIMENSIONS

1. PURPOSE:

To provide a progression of standard mounting flanges and shafts that are dimensionally compatible.

2. SCOPE:

Ø

This SAE Standard applies to hydraulic pumps and motors used on off-road self propelled work machines as described in categories 1 through 5 of SAE J1116 JUN86.

3. UNITS:

3.1 The International System of Units (SI) is used herein in accordance with Reference 7.1.

3.2 Customary U. S. units are given for information purposes, and these appear in parentheses next to their SI counterpart.

4. IDENTIFICATION CODE:

4.1 Flange identification codes are found in Table 2.

4.1.1 The number preceding the dash (--) is an approximation, in millimeters, of the mounting flange pilot diameter.

4.1.2 The number following the dash (--) states the number of mounting holes in the flange.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - Flange/Shaft End Combinations

Flange Series	Shaft End Series	SAE J744c Reference
50--	13--	(A--A)
82--	16--	(A)
82--	19--	--
101--	22--	(B)
101--	25--	(B--B)
127--	32--	(C)
127--	38--	(C--C)
152--	44--	(D)
165--	44--	(E)
177--	50--	(F)

Example: 127-2, 38-4 formerly was "C-C" mounting arrangement, that is, a 2 bolt "C" flange with a 1.50 in diameter 30 deg involute spline shaft.

4.2 Shaft identification codes are found in Tables 3, 4, and 5.

4.2.1 The number preceding the dash (--) is an approximation, in millimeters, of the shaft major diameter.


4.2.2 The number following the dash (--) is arbitrarily assigned as follows:

Straight Shaft without Thread	1
Straight Shaft with Thread	2
Tapered Shaft with Thread	3
30 deg Involute Spline	4

5. PREFERRED FLANGE/SHAFT END COMBINATIONS (see Table 1.)

mm diam. - 1 place ± 0.5 ; 2 place ± 0.25
(inch dim. - 2 place ± 0.02 ; 3 place ± 0.010)
micrometer (micro inch)


Dimensions in mm (in)

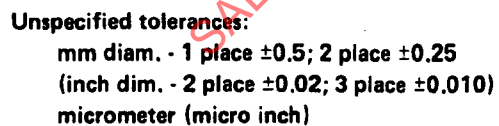

Dimensions in mm (in)

6. FLANGE/SHAFT CONCENTRICITY:

Maintain flange/shaft concentricity within 0.25 mm (0.010 in) in accordance with Tables 3, 4, and 5. (Rigid couplings may require closer tolerance.)

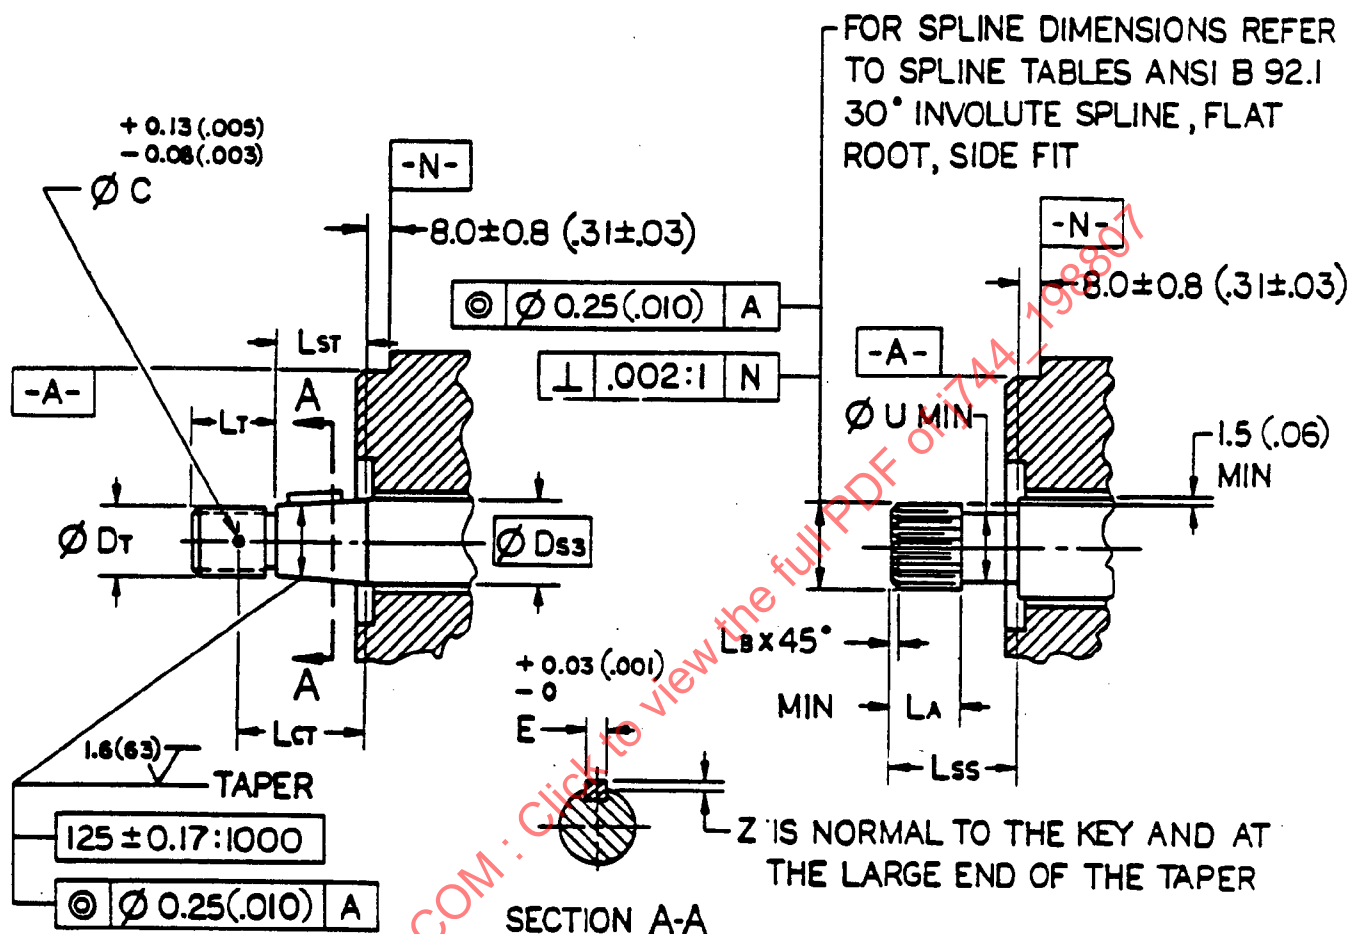

Unspecified tolerances:

mm diam. - 1 place ± 0.5 ; 2 place ± 0.25
 (inch dim. - 2 place ± 0.02 ; 3 place ± 0.010)
 micrometer (micro inch)

Dimensions in mm (in)

7. REFERENCES:

- 7.1 SAE Dual Dimensioning Standard - SAE J390.
- 7.2 Rules for SAE Use of SI (Metric) Units - SAE J916 JUN82.
- 7.3 Categories of Off-Road Self-Propelled Work Machines - SAE J1116 JUN86.
- 7.4 American National Standard for Dimensioning and Tolerancing - ANSI Y14.5M.
- 7.5 Screw Threads - ANSI B1.1.
- 7.6 Involute Splines and Inspection - ANSI B92.1 - 1970.

TABLE 2 - Dimensions of 2 and 4 Bolt Pump and Motor Mounting Flanges

Identification Code	Pilot Dimensions				2 Bolt Type				4 Bolt Type			
	A Noted	W Noted	X Min.	Y Max.	B Cast Dim.	J	K	M Noted	P ₁ Cast Dim.	S	R Noted	P ₂ Cast Dim.
50--a (A--A)	50.80 (2.000)	6.4 (0.250)	-	0.8 (0.03)	64 (2.50)	14 (0.56)	82.6 (3.250)	10.3 (0.406)	10 (0.38)	-	-	-
82--a (A)	82.55 (3.250)	6.4 (0.250)	-	0.8 (0.03)	95 (3.75)	18 (0.72)	106.4 (4.188)	11.1 (0.438)	12 (0.47)	-	-	-
101--a (B)	101.60 (4.000)	9.7 (0.380)	51 (2.00)	1.5 (0.06)	120 (4.75)	25 (0.99)	146.0 (5.750)	14.3 (0.562)	14 (0.56)	89.8 (3.536)	14.3 (0.562)	14 (0.56)
127--a (C)	127.00 (5.000)	12.7 (0.500)	64 (2.50)	1.5 (0.06)	148 (5.81)	31 (1.22)	181.0 (7.125)	17.5 (0.688)	16 (0.62)	114.5 (4.508)	14.3 (0.562)	16 (0.62)
152--a (D)	152.40 (6.000)	12.7 (0.500)	70 (2.75)	1.5 (0.06)	200 (7.88)	40 (1.55)	228.6 (9.000)	20.6 (0.812)	19 (0.75)	161.6 (6.364)	20.6 (0.812)	19 (0.75)
165--a (E)	165.10 (6.500)	15.9 (0.625)	70 (2.75)	2.3 (0.09)	270 (10.62)	55 (2.15)	317.5 (12.500)	27.0 (1.062)	25 (1.00)	224.5 (8.839)	20.6 (0.812)	19 (0.75)
177--a (F)	177.80 (7.000)	15.9 (0.625)	70 (2.75)	2.3 (0.09)	300 (11.75)	60 (2.37)	350.0 (13.781)	27.0 (1.062)	25 (1.00)	247.5 (9.745)	27.0 (1.062)	25 (1.00)

a--2 2 Bolt, --4 4 Bolt Flange

TABLE 3 - Dimensions of Straight Shafts - Without and With Thread

Identification Code	Straight Shaft			No Thread--1			With Thread--2		
	DS1	LS	F	E	LL Optional	DT ANSI B1.1	C Noted	LC	LT
13--a (A--A)	12.70 (0.500)	19 (0.750)	14.07 (0.554)	3.18 (0.125)	-	3/8--24 UNF 2A	2.4 (0.094)	29 (1.125)	14.25 (0.562)
16--a (A)	15.88 (0.625)	24 (0.938)	17.60 (0.693)	3.97 (0.1563)	51 (2.00)	1/2--20 UNF 2A	3.2 (0.125)	34 (1.344)	18.25 (0.719)
19--a (B)	19.05 (0.750)	24 (0.938)	21.10 (0.831)	4.78 (0.188)	51 (2.00)	1/2--20 UNF 2A	3.2 (0.125)	34 (1.344)	18.25 (0.719)
22--a (B)	22.22 (0.875)	33 (1.312)	24.90 (0.982)	6.35 (0.250)	63 (2.50)	5/8--18 UNF 2A	4.0 (0.156)	48 (1.875)	23.00 (0.906)
25--a (B--B)	25.40 (1.000)	38 (1.500)	28.10 (1.106)	6.35 (0.250)	70 (2.75)	3/4--16 UNF 2A	4.0 (0.156)	52 (2.062)	27.00 (1.062)
32--a (C)	31.75 (1.250)	48 (1.875)	35.20 (1.386)	7.94 (0.3125)	76 (3.00)	1--12 UNF 2A	4.0 (0.156)	67 (2.625)	31.00 (1.219)
38--a (C--C)	38.10 (1.500)	54 (2.125)	42.27 (1.664)	9.52 (0.375)	83 (3.25)	1-1/8--12 UNF 2A	4.0 (0.156)	73 (2.875)	34.90 (1.375)
44--a (D & E)	44.45 (1.750)	67 (2.625)	49.30 (1.941)	11.11 (0.4375)	92 (3.62)	1-1/4--12 UNF 2A	4.0 (0.156)	89 (3.500)	39.70 (1.562)

a-- 1 without thread, -- 2 with thread

TABLE 4 - Dimensions of Taper Shaft Ends With Thread--3

Identification Code	Ds3	DT ANSI B1.1	C Noted	LCT	LST	LT	E Noted	Z	
								Max	Min
13--3 (A--A)	12.70 (0.500)	5/16--32 UNF 2A	2.0 (0.078)	25 (0.984)	17.48 (0.688)	12.70 (0.500)	3.18 (0.125)	1.63 (0.064)	1.37 (0.054)
16--3 (A)	15.88 (0.625)	1/2--20 UNF 2A	3.2 (0.125)	28 (1.094)	17.48 (0.688)	18.26 (0.719)	3.97 (0.1563)	2.13 (0.084)	1.88 (0.074)
19--3	19.05 (0.750)	1/2--20 UNF 2A	3.2 (0.125)	34 (1.344)	23.83 (0.938)	18.26 (0.719)	4.78 (0.188)	2.54 (0.100)	2.29 (0.090)
22--3 (B)	12.22 (0.875)	5/8--18 UNF 2A	4.0 (0.156)	43 (1.688)	28.58 (1.125)	23.01 (0.906)	6.35 (0.250)	3.33 (0.131)	3.07 (0.121)
25--3 (B--B)	25.40 (1.00)	3/4--16 UNF 2A	4.0 (0.156)	49 (1.938)	34.92 (1.375)	26.97 (1.062)	6.35 (0.250)	3.33 (0.131)	3.07 (0.121)
32--3 (C)	31.75 (1.25)	1--12 UNF 2A	4.0 (0.156)	49 (1.938)	34.92 (1.375)	30.96 (1.219)	7.34 (0.3125)	4.11 (0.162)	3.86 (0.152)
38--3 (C--C)	38.10 (1.50)	1-1/8--12 UNF 2A	4.0 (0.156)	62 (2.438)	47.62 (1.875)	34.92 (1.375)	3.52 (0.375)	4.93 (0.194)	4.67 (0.184)
44--3 (D & E)	44.45 (1.75)	1-1/4--12 UNF 2A	4.0 (0.156)	71 (2.812)	53.98 (2.125)	39.67 (1.562)	11.11 (0.4375)	5.72 (0.225)	5.46 (0.215)
50--3 (F)	50.80 (2.00)	1-1/4--12 UNF 2A	4.0 (0.156)	90 (3.562)	73.02 (2.875)	39.67 (1.562)	12.70 (0.500)	6.50 (0.256)	6.25 (0.246)

TABLE 5 - DIMENSIONS OF 30 DEG INVOLUTE SPLINE SHAFTS--4

Identification Code	Spline	U Min	L _A Min	L _{SS} ^a	L _B
13--4 (A--A)	9T 20/40 DP	9.40 (0.3700)	5.1 (0.20)	19 (0.750)	1.5 (0.06)
16--4 (A)	9T 16/32 DP	11.81 (0.4650)	7.6 (0.30)	24 (0.938)	1.5 (0.06)
19--4	11T 16/32 DP	14.99 (0.5900)	8.9 (0.35)	30 (1.180)	1.5 (0.06)
22--4 (B)	13T 16/32 DP	18.16 (0.7150)	10.2 (0.40)	33 (1.312)	1.5 (0.06)
25--4 (B--B)	15T 16/32 DP	21.34 (0.8400)	12.7 (0.50)	38 (1.500)	1.5 (0.06)
32--4 (C)	14T 12/24 DP	26.42 (1.0400)	15.2 (0.60)	48 (1.875)	2.3 (0.09)
38--4 (C--C)	17T 12/24 DP	32.77 (1.2900)	17.8 (0.70)	54 (2.125)	2.3 (0.09)
44--4 (D & E)	13T 8/16 DP	36.63 (1.4420)	20.3 (0.80)	67 (2.625)	3.0 (0.12)
50--4 (F)	15T 8/16 DP	42.95 (1.6910)	25.4 (1.00)	80 (3.125)	3.0 (0.12)

^aL_{SS}--Defined as maximum coupler engagement.

The phi (Ø) symbol is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. If the symbol is next to the report title, it indicates a complete revision of the report.