

**STANDARD
SAE J962b**

APPROVED AS ANSI B116.3-1976
BY AMERICAN NATIONAL
STANDARDS INSTITUTE

**FORMED TUBE ENDS
FOR HOSE CONNECTIONS—SAE 962b**

SPONSORED BY:
SOCIETY OF AUTOMOTIVE ENGINEERS, INC.

PUBLISHED BY:
SOCIETY OF AUTOMOTIVE ENGINEERS, INC., 400 Commonwealth Drive, Warrendale, PA 15096

SAENORM.COM : Click to view the full PDF of j962b_197606

The ϕ symbol is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. If the symbol is next to the report title, it indicates a complete revision of the report.

Copyright © Society of Automotive Engineers, Inc. 1976
All rights reserved.

FORMED TUBE ENDS FOR HOSE CONNECTIONS—SAE J962b

SAE Standard

Report of Tube, Pipe, Hose and Lubrication Fittings Committee approved June 1966 and last revised June 1976.

GENERAL SPECIFICATIONS

Scope—This SAE Standard covers the dimensional and general specifications applicable to those formed tube end configurations suitable for hose connections made with or without hose clamps (see SAE J536) in relatively low pressure applications.

Dimensions and Tolerances—Dimensions in this standard are based on, and unless designated otherwise, are specified in inches with SI equivalents shown adjacent to respective inch dimensions or designated mm in the text and

tables in accordance with SAE J916. Tabulated dimensions shall apply to finished ends, plated or otherwise processed. Dimensions specified apply to metal tubing having a nominal wall thickness of 0.028–0.035 in (0.71–0.89 mm). Forming of tube having a wall thickness outside this range may require adjustment of dimensions. Tolerance on all dimensions not otherwise specified shall be ± 0.010 in (± 0.25 mm).

Workmanship—Formed tube ends shall be free from burrs, cracks, sharp edges, irregularities in diameters and any other defects affecting serviceability.

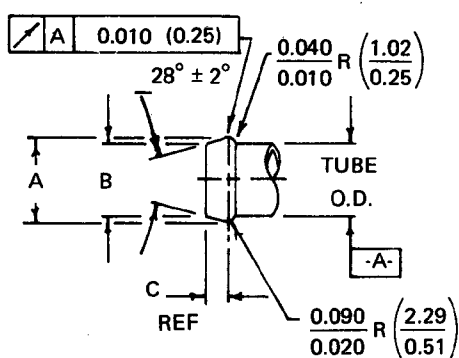


FIG. 1—STYLE A

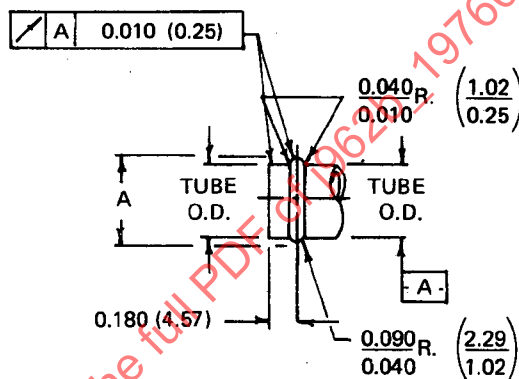


FIG. 2—STYLE B

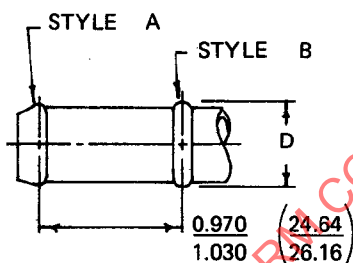


FIG. 3

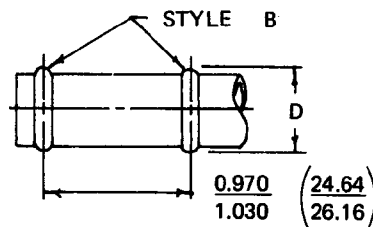


FIG. 4

TABLE 1—DIMENSIONS OF FORMED TUBE ENDS (FIGS. 1–4)

Nominal Tube OD	Outside Dia., A		End Dia., B		End to Center, C Ref ^a		D Dia ± 0.020 (0.51)	
	in	mm	in	mm	in	mm	in	mm
3/16	0.220	5.59	0.180	4.57	0.080	2.03	0.220	5.59
1/4	0.290	7.37	0.240	6.10	0.100	2.54	0.290	7.37
5/16	0.360	9.14	0.310	7.87	0.100	2.54	0.360	9.14
3/8	0.430	10.92	0.380	9.65	0.100	2.54	0.430	10.92
7/16	0.490	12.45	0.440	11.18	0.100	2.54	0.490	12.45
1/2	0.560	14.22	0.500	12.70	0.120	3.05	0.560	14.22
9/16	0.620	15.75	0.560	14.22	0.120	3.05	0.620	15.75
5/8	0.690	17.53	0.630	16.00	0.120	3.05	0.690	17.53

^aFor reference purposes only, not intended for inspection.